

Вставные DIN-рейки ТВ серии DS

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70


Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru>

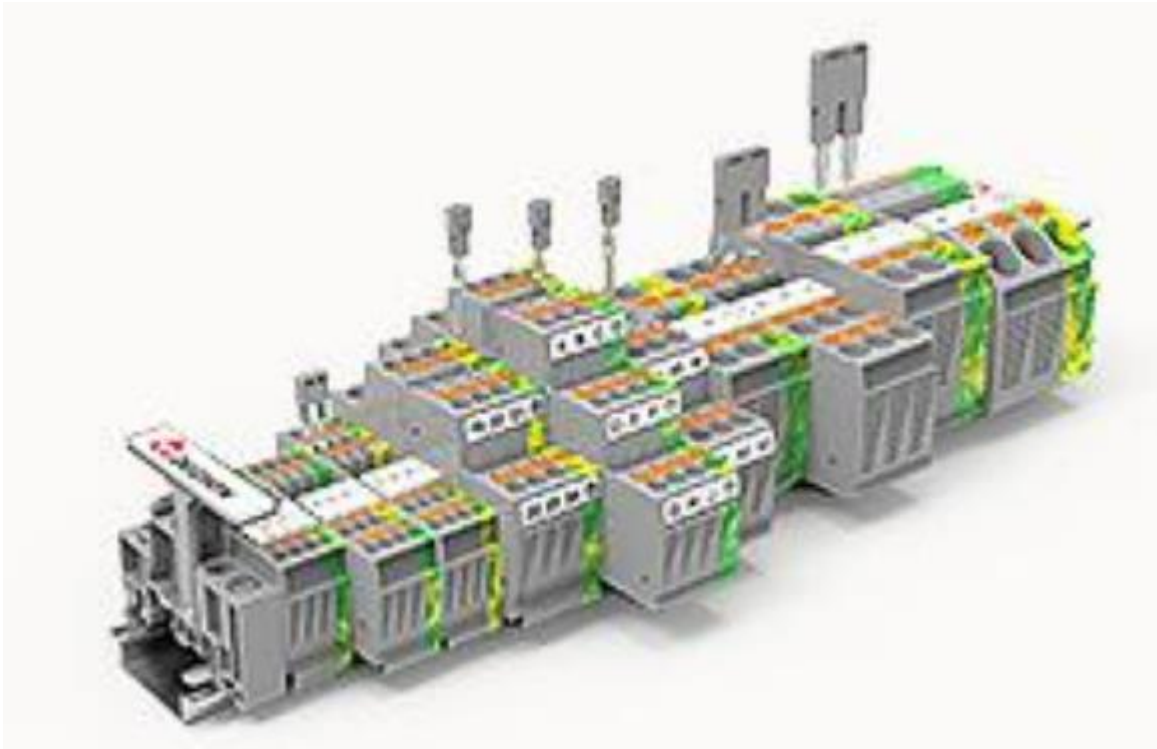

Push-In DIN-Rail TB

Tool-free wiring can be realized Fast wiring, save time and effort



DS1.5

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 17.5 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS1.5-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS1.5-TW

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 17.5 A, Number of connectors: 3, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS1.5-TW-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 3, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS1.5-QU

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 17.5 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS1.5-QU-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 4, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DSKK1.5

Double-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 16 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DSKK1.5-PV

Double-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 16 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DSKK1.5-PE

Double-level terminal block, connector method: Push-in connector, Number of connectors: 4, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS1.5-3L

Multi-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 15 A, Number of connectors: 6, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS1.5-3L-PV

Multi-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 15 A, Number of connectors: 6, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS1.5-3L-L/L/PE

Multi-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 15 A, Number of connectors: 6, Number of potentials: 1, Cross section: 0.14 mm² - 1.5



DS1.5-3L-L/N/PE

Multi-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 15 A, Number of connectors: 6, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS1.5-3L-PE

Multi-level terminal block, connector method: Push-in connector, Number of connectors: 6, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS2.5

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 800 V, Rated current : 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS2.5-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS2.5-TW

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 800 V, Rated current : 24 A, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS2.5-TW-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS2.5-QU

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 800 V, Rated current : 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS2.5-QU-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DSKK2.5

Double-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 22 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DSKK2.5-PV

Double-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 22 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DSKK2.5-PE

Double-level terminal block, connector method: Push-in connector, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS2.5-3L

Multi-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 20 A, Number of connectors: 6, Number of potentials: 1, Cross section: 0.2 mm² - 4



DS2.5-3L-PV

Multi-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 20 A, Number of connectors: 6, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS2.5-3L-L/L/PE

Multi-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 20 A, Number of connectors: 6, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS2.5-3L-L/N/PE

Multi-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 20 A, Number of connectors: 6, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS2.5-3L-PE

Multi-level terminal block, connector method: Push-in connector, Number of connectors: 6, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS2.5-PE/3L

Multi-level terminal block, connector method: Push-in connector, Rated voltage : 800 V, Rated current : 20 A, Number of connectors: 7, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS2.5-MT

Disconnect terminal blocks, connector method: Push-in connector, Rated voltage : 400 V, Rated current : 20 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS2.5-TG

Disconnect terminal blocks, connector method: Push-in connector, Rated voltage : 400 V, Rated current : 20 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS2.5-LD L-R

Diode terminal blocks, connector method: Push-in connector, Backward voltage: 1300 V,
Rated voltage : 800 V, Rated current : 1 A, Number of connectors: 2, Number of potentials: 1,
Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type:
NS35/7.5, NS35/15



DS2.5-LD R-L

Diode terminal blocks, connector method: Push-in connector, Backward voltage: 1300 V,
Rated voltage : 800 V, Rated current : 1 A, Number of connectors: 2, Number of potentials: 1,
Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type:
NS35/7.5, NS35/15



DS2.5-TW-LD L-R

Diode terminal blocks, connector method: Push-in connector, Backward voltage: 1300 V,
Rated voltage : 800 V, Rated current : 1 A, Number of connectors: 3, Number of potentials: 1,
Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type:
NS35/7.5, NS35/15



DS2.5-TW-LD R-L

Diode terminal blocks, connector method: Push-in connector, Backward voltage: 1300 V,
Rated voltage : 800 V, Rated current : 1 A, Number of connectors: 3, Number of potentials: 1,
Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type:
NS35/7.5, NS35/15



DS2.5-QU-LD L-R

Diode terminal blocks, connector method: Push-in connector, Backward voltage: 1300 V,
Rated voltage : 800 V, Rated current : 1 A, Number of connectors: 4, Number of potentials: 1,
Cross



DS2.5-QU-LD R-L

Diode terminal blocks, connector method: Push-in connector, Backward voltage: 1300 V,
Rated voltage : 800 V, Rated current : 1 A, Number of connectors: 4, Number of potentials: 1,
Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type:
NS35/7.5, NS35/15



DS2.5/1P

Plug-in terminal blocks, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS2.5/1P-PE

Plug-in terminal blocks, connector method: Push-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 5.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS4

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 800 V, Rated current : 32 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS4-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS4-TW

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 800 V, Rated current : 32 A, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS4-TW-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS4-QU

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 800 V, Rated current : 32 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS4-QU-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DSKK4

Double-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 32 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DSKK4-PV

Double-level terminal block, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 32 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DSKK4-PE

Double-level terminal block, connector method: Push-in connector, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS4-HE

Fuse terminal blocks, connector method: Push-in connector, Fuse type: G / 5 x 20, Glass/ceramic/..., Rated voltage : 400 V, Rated current : 6.3 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: black, Mounting type: NS35/7.5, NS35/15



DS4-HE-LD24

Fuse terminal blocks, connector method: Push-in connector, Fuse type: G / 5 x 20, Glass/ceramic/..., Rated voltage : 24 V, Rated current : 6.3 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: black, Mounting type: NS35/7.5, NS35/15



DS4-HE-LD60

Fuse terminal blocks, connector method: Push-in connector, Fuse type: G / 5 x 20, Glass/ceramic/..., Rated voltage : 60 V, Rated current : 6.3 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: black, Mounting type: NS35/7.5, NS35/15



DS4-HE-LD250

Fuse terminal blocks, connector method: Push-in connector, Fuse type: G / 5 x 20, Glass/ceramic/..., Rated voltage : 250 V, Rated current : 6.3 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: black, Mounting type: NS35/7.5, NS35/15



DS4-MT

Disconnect terminal blocks, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 20 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS4-TG

Disconnect terminal blocks, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 20 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 6.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS6

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 1000 V, Rated current : 41 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, Width: 8.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS6-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, Width: 8.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS6-TW

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 1000 V, Rated current : 41 A, Number of connectors: 3, Number of potentials: 1, Cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, Width: 8.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS6-TW-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 3, Number of potentials: 1, Cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, Width: 8.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS6-QU

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 1000 V, Rated current : 41 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, Width: 8.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS6-QU-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 4, Number of potentials: 1, Cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, Width: 8.2 mm, Color: green



DS6-MT

Disconnect terminal blocks, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 20 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 10 mm², AWG: 20 - 8, Width: 8.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS6-TG

Disconnect terminal blocks, connector method: Push-in connector, Rated voltage : 500 V, Rated current : 20 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 10 mm², AWG: 20 - 8, Width: 8.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS10

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 1000 V, Rated current : 57 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.5 mm² - 16 mm², AWG: 20 - 6, Width: 10.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS10-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.5 mm² - 16 mm², AWG: 20 - 6, Width: 10.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS10-TW

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 1000 V, Rated current : 57 A, Number of connectors: 3, Number of potentials: 1, Cross section: 0.5 mm² - 16 mm², AWG: 20 - 6, Width: 10.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS10-TW-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 3, Number of potentials: 1, Cross section: 0.5 mm² - 16 mm², AWG: 20 - 6, Width: 10.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS16

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 1000 V, Rated current : 76 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.5 mm² - 25 mm², AWG: 20 - 4, Width: 12.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS16-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.5 mm² - 25 mm², AWG: 20 - 4, Width: 12.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DS16-TW

Push-in Din-Rail TB, connector method: Push-in connector, Rated voltage : 1000 V, Rated current : 76 A, Number of connectors: 3, Number of potentials: 1, Cross section: 0.5 mm² - 25 mm², AWG: 20 - 4, Width: 12.2 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DS16-TW-PE

Push-in Din-Rail TB, connector method: Push-in connector, Number of connectors: 3, Number of potentials: 1, Cross section: 0.5 mm² - 25 mm², AWG: 20 - 4, Width: 12.2 mm, Color: green-yellow, Mounting type: NS35/7.5, NS35/15



DSIO1.5/3

Sensor terminal blocks, connector method: Push-in connector, Rated voltage : 250 V, Rated current : 13.5 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DSIO1.5/3-PE

Sensor terminal blocks, connector method: Push-in connector, Rated voltage : 250 V, Rated current : 13.5 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.14 mm²



DSIO1.5/4

Sensor terminal blocks, connector method: Push-in connector, Rated voltage : 250 V, Rated current : 13.5 A, Number of connectors: 5, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DSIO1.5/4-PE

Sensor terminal blocks, connector method: Push-in connector, Rated voltage : 250 V, Rated current : 13.5 A, Number of connectors: 5, Number of potentials: 1, Cross section: 0.14 mm² - 1.5 mm², AWG: 26 - 14, Width: 3.5 mm, Color: gray, Mounting type: NS35/7.5, NS35/15



DSIO-IN 2.5/3 OG

Power terminals, connector method: Push-in connector, Rated voltage : 250 V, Rated current : 20 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 26 - 12, Width: 7 mm, Color: Orange, Mounting type: NS35/7.5, NS35/15



DSIO-IN 2.5/4-PE OG

Power terminals, connector method: Push-in connector, Rated voltage : 250 V, Rated current : 20 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG:

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru>