

DIN-рейки ТВ пружинного типа серии WS

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70


Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru>

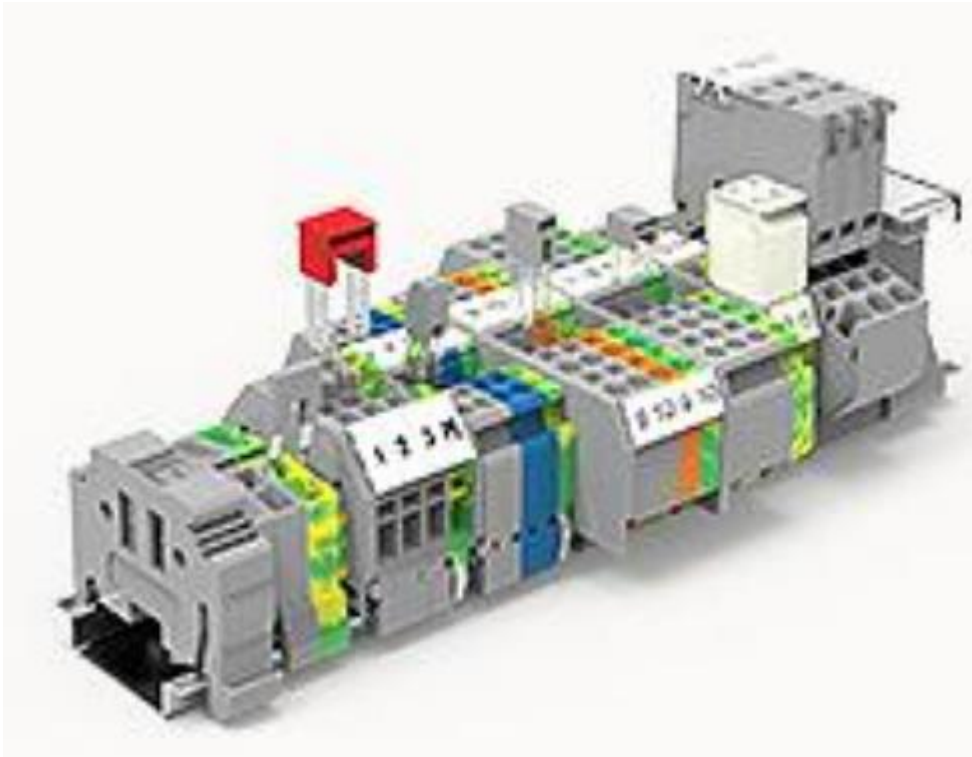

Spring-Cage Type DIN-Rail TB

Spring-cage connection technology, good vibration resistance performance



WS2.5-127A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS2.5-PE-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS2.5-TW-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS2.5-TW-PE-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS2.5-QU-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS2.5-QU-PE-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS2.5-QU-LD-104A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage: 250 V, Backward voltage : 1000V, Rated current: 0.5 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS2.5-QU-LD-110A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS4-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 32 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 28 - 12, Width: 6 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS4-PE-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 28 - 12, Width: 6 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WSF4-TA-10A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 10 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm²- 4 mm², AWG: 28 - 12, Width: 6 mm, Fuse type: Glass/ceramic/..., Fuse type: G / 5 x 20, Color: black, Mounting type: NS 35/7.5, NS 35/15.



WSF4-TA-08A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage: 24 V, Rated current: 6.3 A, Number of connectors: 2, Number of potentials: 1, Cross



WS1.5-DB-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 17.5 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 5 mm, Color: gray, Mounting type: Panel installation



WS1.5T-DB-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 17.5 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 8 mm, Color: gray, Mounting type: Panel installation



WS2.5-DB-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 6 mm, Color: gray, Mounting type: Panel installation



WS2.5-DB-21A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 6 mm, Color: gray, Mounting type: Panel installation



WS2.5-DB-10A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 6 mm, Color: gray, Mounting type: Panel installation



WS2.5T-DB-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 10 mm, Color: gray, Mounting type: Panel installation



WS2.5T-DB-21A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 10 mm, Color: gray, Mounting type: Panel installation



WS2.5T-DIN35-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 10 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS1.5

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 18 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 4 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS1.5-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 4 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS1.5-TW

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 18 A, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 4 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS1.5-TW-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width



WS1.5-QU

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 18 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 4 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS1.5-QU-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 18 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 4 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS1.5-QU-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 4 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS1.5-SD

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 18 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 4 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS1.5-DB

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 17.5 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 5 mm, Color: gray, Mounting type: Panel installation



WS1.5-DB-11A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 17.5 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 5 mm, Color: gray, Mounting type: Panel installation



WS1.5T-DB

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 17.5 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 8 mm, Color: gray, Mounting type: Panel installation



WS1.5T-DB-11A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 17.5 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 1.5 mm², AWG: 28 - 16, Width: 8 mm, Color: gray, Mounting type: Panel installation



WS2.5-TW-TA

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS2.5-TW-TA-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS2.5-QU-LD-100A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage: 250 V, Backward voltage : 1000V, Rated current: 0.5 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 5 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS2.5-SD

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section



WS2.5-SD-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 5 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS2.5P

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage: 500 V, Rated current: 22 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 5 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS2.5P-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 5 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS2.5-DIN35

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 6 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS2.5-DIN15

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 6 mm, Color: gray, Mounting type: NS 15



WS2.5T-DIN15

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 10 mm, Color: gray, Mounting type: NS 15



WS2.5-MID-CO

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 6 mm, Color: gray, Mounting type: Panel installation



WS2.5T-MID-CO

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 10 mm, Color: gray, Mounting type: Panel installation



WS2.5-END-CO

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 6 mm, Color: gray, Mounting type: Panel installation



WS2.5T-END-CO

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 12, Width: 10 mm, Color: gray, Mounting type: Panel installation



WS2.5-DB

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 6 mm, Color: gray, Mounting type: Panel installation



WS2.5-DB-11A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 2, Number of potentials: 1, Cross section



WS2.5T-DB

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 10 mm, Color: gray, Mounting type: Panel installation



WS2.5T-DB-11A(H)

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 24 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 2.5 mm², AWG: 28 - 14, Width: 10 mm, Color: gray, Mounting type: Panel installation



WS4-TW

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 32 A, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 28 - 12, Width: 6 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS4-TW-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 28 - 12, Width: 6 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS4-QU

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 32 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 28 - 12, Width: 6 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS4-QU-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm²,
AWG: 28 - 12, Width: 6 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS4-SD

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Rated voltage : 800 V, Rated current: 32 A, Number of connectors: 2, Number of
potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 28 - 12, Width: 6 mm, Color: gray,
Mounting type: NS 35/7.5, NS 35/15



WS4-DB

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Rated voltage: 630 V, Rated current: 32 A, Number of connectors: 2, Number of
potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 28 - 12, Width: 7 mm, Color: gray,
Mounting type: Panel installation



WS4T-DB

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage: 630 V, Rated current: 32 A, Number of connectors: 4, Number of potentials: 1, Cross section: 0.2 mm² - 4 mm², AWG: 28 - 12, Width: 12 mm, Color: gray, Mounting type: Panel installation



WS6

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 41 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 8 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS6-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm²,
AWG: 24 - 10, Width: 8 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS6-TW

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Rated voltage : 800 V, Rated current: 41 A, Number of connectors: 3, Number of
potentials: 1, Cross section



WS6-TW-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm²,
AWG: 24 - 10, Width: 8 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS6-SD

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Rated voltage : 800 V, Rated current: 41 A, Number of connectors: 2, Number of
potentials: 1, Cross section: 0.2 mm² - 6 mm², AWG: 24 - 10, Width: 8 mm, Color: gray,
Mounting type: NS 35/7.5, NS 35/15



WS6-SD-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 6 mm²,
AWG: 24 - 10, Width: 8 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS10

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Rated voltage : 800 V, Rated current: 57 A, Number of connectors: 2, Number of
potentials: 1, Cross section: 0.2 mm² - 10 mm², AWG: 24 - 8, Width: 10 mm, Color:
gray, Mounting type: NS 35/7.5, NS 35/15



WS10-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 10 mm²,
AWG: 24 - 8, Width: 10 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS10-TW

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Rated voltage : 800 V, Rated current: 57 A, Number of connectors: 3, Number of
potentials: 1, Cross section: 0.2 mm² - 10 mm², AWG: 24 - 8, Width: 10 mm, Color:
gray, Mounting type: NS 35/7.5, NS 35/15



WS10-TW-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 10 mm²,
AWG: 24 - 8, Width: 10 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS10-SD

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 57 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 10 mm², AWG: 24 - 8, Width: 10 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS10-SD-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 10 mm², AWG: 24 - 8, Width: 10 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS16

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 76 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 16 mm², AWG: 24 - 6, Width: 12 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS16-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 16 mm²,
AWG: 24 - 6, Width: 12 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS16-TW

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Rated voltage : 800 V, Rated current: 76 A, Number of connectors: 3, Number of
potentials: 1, Cross section



WS16-TW-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector,
Number of connectors: 3, Number of potentials: 1, Cross section: 0.2 mm² - 16 mm²,
AWG: 24 - 6, Width: 12 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS16-SD

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage : 800 V, Rated current: 76 A, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 16 mm², AWG: 24 - 6, Width: 12 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS16-SD-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 0.2 mm² - 16 mm², AWG: 24 - 6, Width: 12 mm, Color: green-yellow, Mounting type: NS 35/7.5, NS 35/15



WS35

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Rated voltage: 1000 V, Rated current: 125 A, Number of connectors: 2, Number of potentials: 1, Cross section: 2.5 mm² - 35 mm², AWG: 14 - 2, Width: 16 mm, Color: gray, Mounting type: NS 35/7.5, NS 35/15



WS35-PE

Spring-cage type Din-Rail TB, connector method: Spring-cage/plug-in connector, Number of connectors: 2, Number of potentials: 1, Cross section: 2.5 mm² - 35 mm², AWG: 14 - 2, Width

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru>