

Аксессуары для клеммных колодок

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70


Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59


Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru>

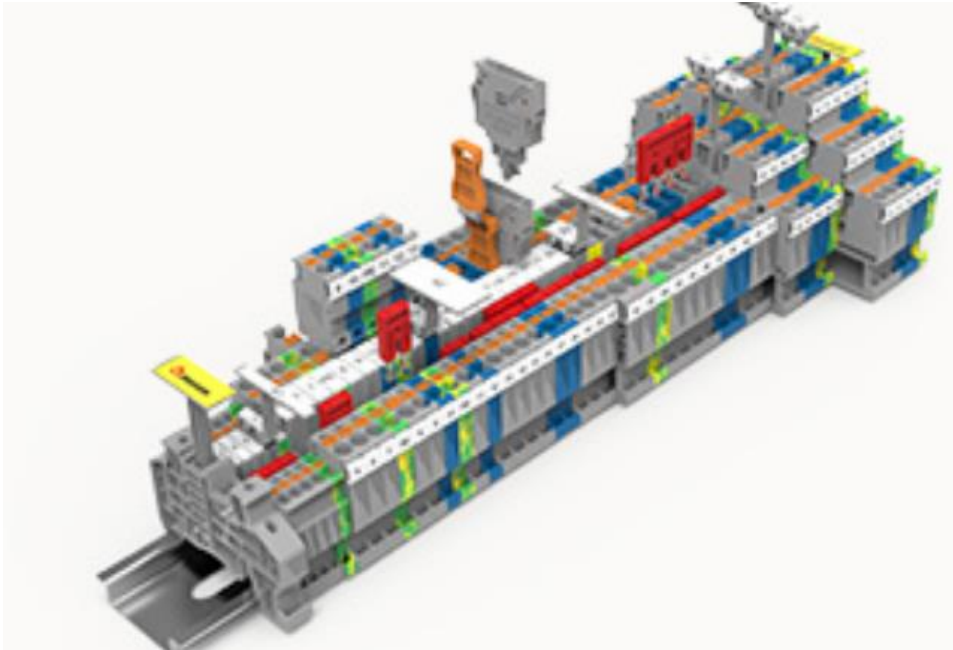


Terminal block accessories

Used with Din-rail terminal blocks to achieve different functions.

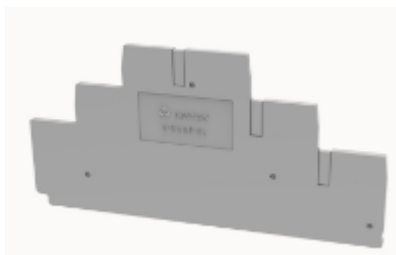


D-DS1.5

End cover, Width: 1.5 mm, Color: gray

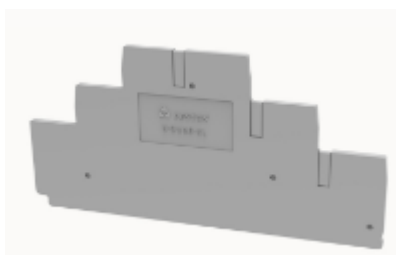


D-DS1.5-TW

End cover, Width: 1.5 mm, Color: gray

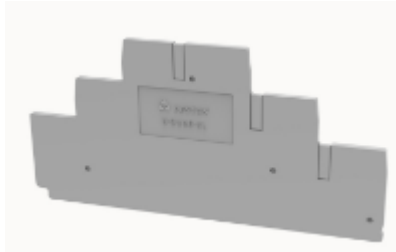


D-DS1.5-QU

End cover, Width: 1.5 mm, Color: gray

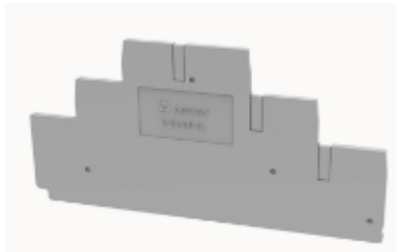


D-DSK1.5

End cover, Width: 1.5 mm, Color: gray

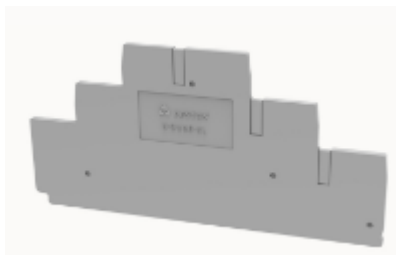


D-DS1.5-3L

End cover, Width: 1.5 mm, Color: gray

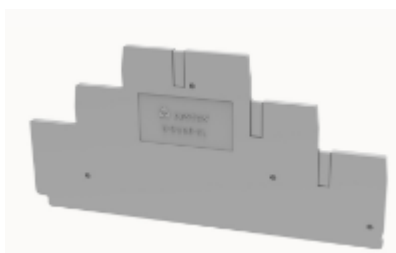


D-DS2.5

End cover, Width: 1.5 mm, Color: gray

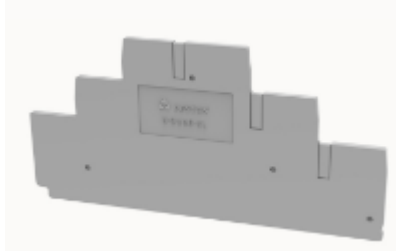


D-DS2.5-TW

End cover, Width: 2.2 mm, Color: gray

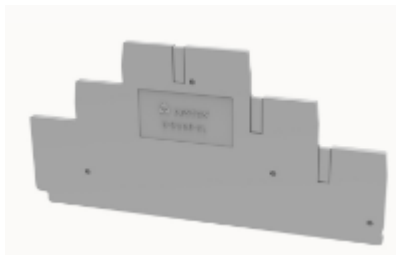


D-DS2.5-QU

End cover, Width: 2.2 mm, Color: gray

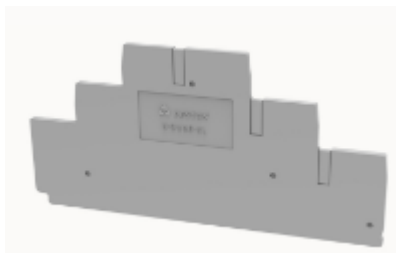


D-DSKK2.5

End cover, Width: 2.2 mm, Color: gray

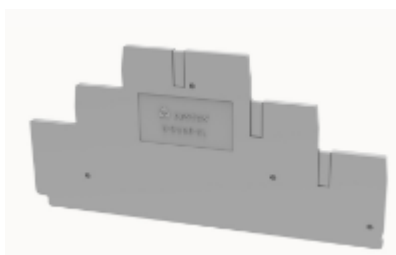


D-DS2.5-3L

End cover, Width: 2.2 mm, Color: gray

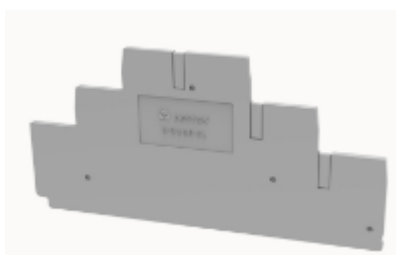


D-DS2.5-PE/3L

End cover, Width: 2.2 mm, Color: gray

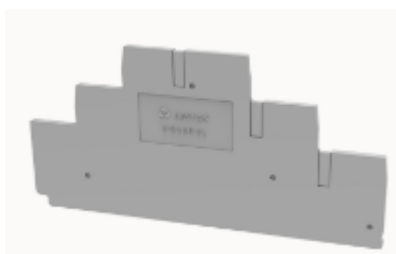


D-DS2.5-MT

End cover, Width: 1.5 mm, Color: gray

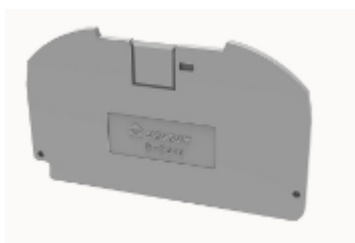


D-DS4

End cover, Width: 1.5 mm, Color: gray

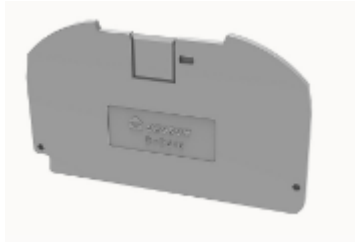


D-DS4-TW

End cover, Width: 2.2 mm, Color: gray

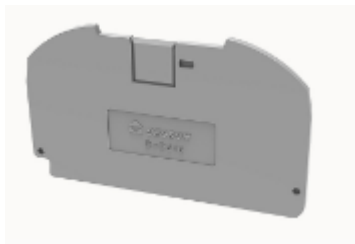


D-DS4-QU

End cover, Width: 2.2 mm, Color: gray

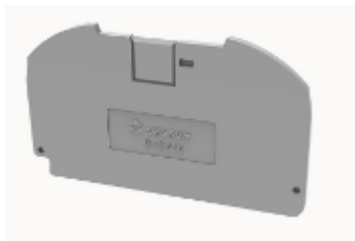


D-DSKK4

End cover, Width: 2.2 mm, Color: gray

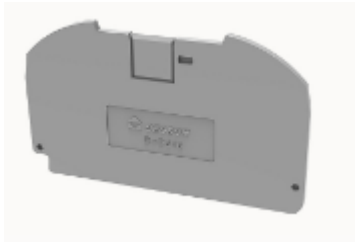


D-DS4-HE

End cover, Width: 1.5 mm, Color: black

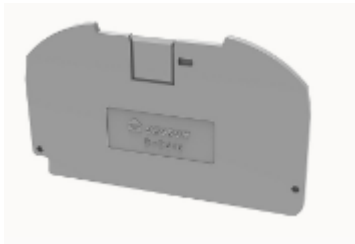


D-DS6

End cover, Width: 1.5 mm, Color: gray

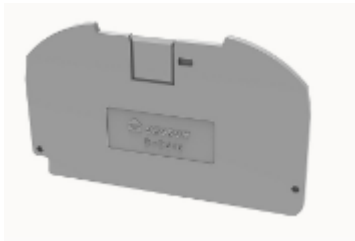


D-DS6-TW

End cover, Width: 1.5 mm, Color: gray

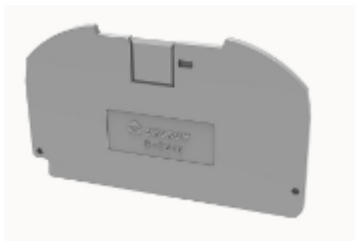


D-DS6-QU

End cover, Width: 1.5 mm, Color: gray

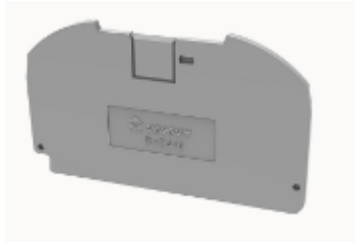


D-DS10

End cover, Width: 1.5 mm, Color: gray

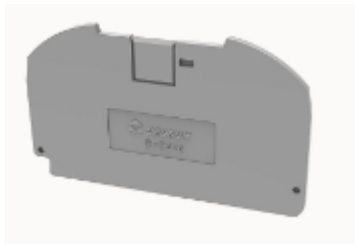


D-DS10-TW

End cover, Width: 2.2 mm, Color: gray

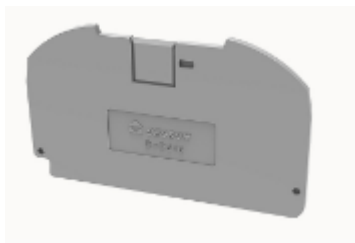

D-DS16

End cover, Width: 2.2 mm, Color: gray

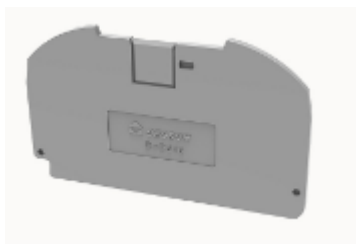

D-DS16-TW

End cover, Width: 2.2 mm, Color: gray



D-DSIO1.5/3-1

End cover, Width: 2.2 mm, Color: gray



D-DSIO1.5/4-1

End cover, Width: 2.2 mm, Color: gray



D-WS1.5

End cover, Width: 2.5 mm, Color: gray



D-WS1.5-TW

End cover, Width: 2.5 mm, Color: gray



D-WS1.5-QU

End cover, Width: 2.5 mm, Color: gray



D-WS1.5-QU-100A(H)

End cover, Width: 2.5 mm, Color: gray



D-WS2.5

End cover, Width: 2.5 mm, Color: gray



D-WS2.5-TW

End cover, Width: 2.5 mm, Color: gray



D-WS2.5-TW-100A(H)

End cover, Width: 2.5 mm, Color: gray



D-WS2.5-QU

End cover, Width: 2.5 mm, Color: gray



D-WS2.5-TW-TA

End cover, Width: 2.5 mm, Color: gray




D-WS1.5-SD

End cover, Width: 2.3 mm, Color: gray




D-WS1.5-DB

End cover, Width: 2.5 mm, Color: gray



D-WS1.5-DB-12A(H)

End cover, Width: 2.5 mm, Color: gray



D-WS2.5-SD

End cover, Width: 2.5 mm, Color: gray



D-WS2.5-DB

End cover, Width: 2.5 mm, Color: gray



D-WS2.5-DB-12A(H)

End cover, Width: 2.5 mm, Color: gray




D-WS2.5-MID-CO

End cover, Width: 4 mm, Color: gray



D-WS2.5-END-CO

End cover, Width: 4 mm, Color: gray



D-WS2.5P

End cover, Width: 2.5 mm, Color: gray



D-WS4-DB

End cover, Width: 2.5 mm, Color: gray




D-WS4

End cover, Width: 2.5 mm, Color: gray




D-WS4-TW

End cover, Width: 2.5 mm, Color: gray




D-WS4-QU

End cover, Width: 2.5 mm, Color: gray




D-WS4-SD

End cover, Width: 2.5 mm, Color: gray




D-WS6

End cover, Width: 2.5 mm, Color: gray




D-WS6-TW

End cover, Width: 2.5 mm, Color: gray




D-WS6-SD

End cover, Width: 4 mm, Color: gray




D-WS10

End cover, Width: 2.5 mm, Color: gray




D-WS10-TW

End cover, Width: 2.5 mm, Color: gray




D-WS10-SD

End cover, Width: 2.5 mm, Color: gray




D-WS16

End cover, Width: 2.5 mm, Color: gray




D-WS16-TW

End cover, Width: 2.5 mm, Color: gray




D-WS16-SD

End cover, Width: 4 mm, Color: gray




D-DC2.5

End cover, Width: 1.5 mm, Color: gray



D-DC2.5-TW

End cover, Width: 1.5 mm, Color: gray




D-PCKK2.5

End cover, Width: 2.5 mm, Color: gray




DP-PCKK2.5

Compensation plate, Width: 2.6 mm, Color: gray




D-PC4-TW

End cover, Width: 2.0 mm, Color: gray




D-PC16

End cover, Width: 1.5 mm, Color: gray



D-PC10-105A(H)

End cover, Width: 2.2 mm, Color: gray



D-PC16-105A(H)

End cover, Width: 1.6 mm, Color: gray




D-PCIK16

End cover, Width: 1.5 mm, Color: gray




D-PCMB2.5

End cover, Width: 1.0 mm, Color: gray




D-PCMT2.5

End cover, Width: 1.0 mm, Color: gray




D-PCTK6

End cover, Width: 2.0 mm, Color: gray



D-PCTK6-BEN

End cover, Width: 2.2 mm, Color: gray



TS-K

Separating disk, Width: 1.0 mm, Color: gray



TS-KK3

Separating disk, Width: 0.5 mm, Color: gray



ATP-PC

Separating disk, Width: 1.5 mm, Color: gray



DFA2.5

Bridge, Spacing: 5.1 mm, Color: gray



DFA4

Bridge, Spacing: 6.1 mm, Color: gray



DFA6

Bridge, Spacing: 8 mm, Color: gray



DFA10

Bridge, Spacing: 10 mm, Color: gray



DFA16

Bridge, Spacing: 12 mm, Color: gray



DFA35

Bridge, Spacing: 16 mm, Color: gray



FBRI XX-4

Fixed bridge, Spacing: 4.2 mm



FBRI XX-5

Fixed bridge, Spacing: 5.2 mm



FBRI XX-6

Fixed bridge, Spacing: 6.2 mm



FBRI XX-8

Fixed bridge, Spacing: 8.2 mm



FBI XX-10

Fixed bridge, Spacing: 10.2 mm



FBI XX-12

Fixed bridge, Spacing: 12.2 mm



FBI XX-15

Fixed bridge, Spacing: 15.2 mm



FBI XX-16

Fixed bridge, Spacing: 16.2 mm



FBI XX-20

Fixed bridge, Spacing: 20 mm



FB XX-RTK/S

Fixed bridge, Spacing: 8.2 mm



FBRI6-RTK/S

Fixed bridge, Spacing: 8 mm



SB XX-RTK/S

Fixed bridge, Spacing: 8.2 mm



EB XX-5

Bridge, Spacing: 5.2 mm, Color: gray



EB XX-6

Bridge, Spacing: 6.2 mm, Color: gray



EB XX-8

Bridge, Spacing: 8.2 mm, Color: gray



EBC XX-8

Bridge, Spacing: 8 mm, Color: gray



EB XX-10

Bridge, Spacing: 10.2 mm, Color: gray



EB10-12

Bridge, Spacing: 12.2 mm, Color: gray



EB10-15

Bridge, Spacing: 15.2 mm, Color: gray



WFA1.5

Bridge, Spacing: 2.6 mm, Color: gray



WFA2.5

Bridge, Spacing: 3.2 mm, Color: gray



WFA4

Bridge, Spacing: 3.6 mm, Color: gray




WFA6

Bridge, Spacing: 5.25 mm, Color: gray



WFA10

Bridge, Spacing: 5.9 mm, Color: gray



WFA16

Bridge, Spacing: 7.0 mm, Color: gray



WFB1.5

Bridge, Spacing: 6.7 mm, Color: gray



WFB2.5

Bridge, Spacing: 8.0 mm, Color: gray



WFB4

Bridge, Spacing: 9.4 mm, Color: gray



WFB6

Bridge, Spacing: 13.2 mm, Color: gray



WFB10

Bridge, Spacing: 15.8 mm, Color: gray



WFB16

Bridge, Spacing: 19.1 mm, Color: gray



WFC2.5

Bridge, Spacing: 8.1 mm - 33.1 mm, Color: gray



WFE-2.5

Bridge, Spacing: 5.95 mm, Color: gray



DFB XX-3.5

Bridge, Spacing: 3.5 mm, Color: Red



DFB XX-5.2

Bridge, Spacing: 5.2 mm, Color: Red



DFBS XX-5.2

Bridge, Spacing: 5.2 mm, Color: Red



DFB XX-6.2

Bridge, Spacing: 6.2 mm, Color: Red



DFB XX-8.2

Bridge, Spacing: 8.2 mm, Color: Red



DFB XX-10.2

Bridge, Spacing: 10.2 mm, Color: Red



DFB XX-12.2

Bridge, Spacing: 12.2 mm, Color: Red



BS8-VBXX

Fixed bridge, Spacing: 29 mm



BS10-VBXX

Fixed bridge, Spacing: 41 mm



EBA40-6

Bridge, Spacing: 6.2 mm, Color: gray



EBA40-8

Bridge, Spacing: 8.2 mm, Color: gray



DS-DI

Disconnect plug, Width: 3.5 mm, Color: Orange, Apply to Disconnect Terminal



DS-PC

Coding star, Width: 2.45 mm, Color: Red, Apply to Push-in connection Terminal



DS-CO

Component plug, Rated voltage: 400 V, Rated current: 6 A, Width: 5.1 mm, Color: gray, Apply to Disconnect Terminal, Individually selectable safety element



DPV2.5

Upper and under Bridges, suitable for upper and under Bridges between two layers



DSR1.5/2.5

Latching, Width: 3.2 mm - 6.8 mm, Color: Orange



DSP2.5-H-L/M/R

Plug, Nominal operating voltage: 500 V, Rated current: 24 A, Mode of connection: Push In connection, Rated connection capacity: 0.2 mm²-2.5 mm², Color: gray, Mounting type: Push-in connection technology



DS-FU5

Fuse plug, Rated voltage: 400 V, Rated current: 6.3 A, Width: 6.35 mm, Apply to Width 5.2 mm Disconnect Terminal, Fuse type: G / 5 x 20, Color: black, Mounting type: Push-in connection technology



DS-FU5-LD24

Fuse plug, Rated voltage: 24 V, Rated current: 6.3 A, Width: 8 mm, Apply to Width 5.2 mm Disconnect Terminal, Fuse type: G / 5 x 20, Color: black, Mounting type: Push-in

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru>