

Клеммные колодки винтового типа для печатных плат

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59


Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru>




Screw Type PCB Terminal Blocks

Screw type connection technology, reliable connection; Single, double and three-layer structure, save space

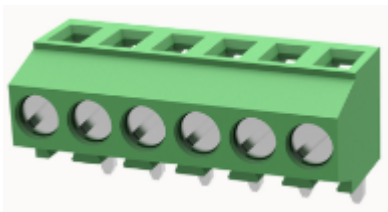


DG381R-3.5

PCB terminal blocks, Rated current: 10A, Rated voltage (III/2) 130V, Cross section: 1.0mm², pitch: 3.5mm, connector method: Screw connector with tension sleeve, Color: green, Contact surface

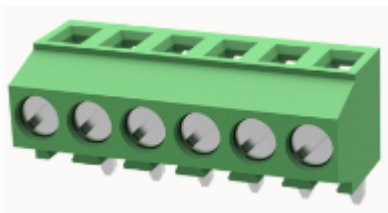


DG636-HT-7.62

PCB terminal blocks, Rated current : 32A, Rated voltage (III/2) : 630V, Cross section : 0.2-4mm², Pitch : 7.62mm, Connection method : Screw connector with tension sleeve, Color : Green, Contact surface : Tin

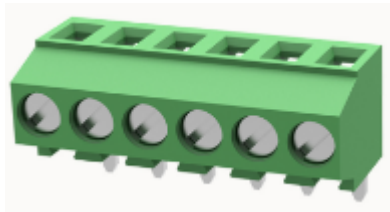


DG137T-15.0

PCB terminal blocks, Rated current : 115A, Rated voltage (III/2) : 1000V, Cross section : 4-35mm², Pitch : 15.0mm, Connection method : Screw connector with tension sleeve, Color : Green, Contact surface : Tin

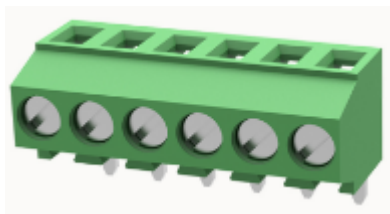


DG500A-5.0-100A

PCB terminal blocks, Rated current : 18A, Rated voltage (III/2) : 250V, Cross section : 1.0-2.5mm², Pitch : 5.0mm, Connection method : Screw connector with tension sleeve, Color : Green, Contact surface : Tin

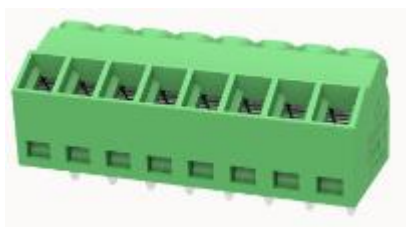


DG500A-5.08-100A

PCB terminal blocks, Rated current : 18A, Rated voltage (III/2) : 250V, Cross section : 1.0-2.5mm², Pitch : 5.08mm, Connection method : Screw connector with tension sleeve, Color : Green, Contact surface : Tin

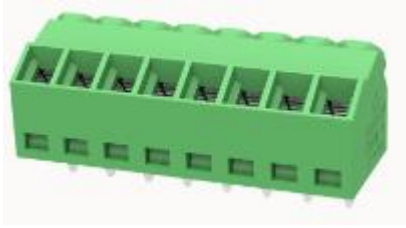


DG380-3.5

PCB terminal blocks, Rated current: 13.5A, Rated voltage (III/2) 200V, Cross section : 0.2-1.0mm², Pitch : 3.5mm, connectoon method : Screw connector with tension sleeve, Color : green, Contact surface

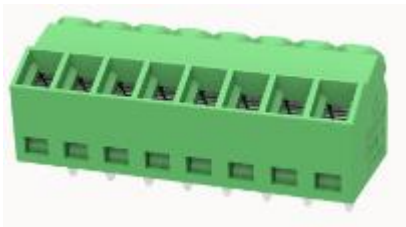


DG381S-HV-3.5

PCB terminal blocks, Rated current: 10A, Rated voltage (III/2) 200V, Cross section : 0.2-1.5mm², Pitch : 3.5mm, connectoon method : Screw connector with tension sleeve, Color : green, Contact surface

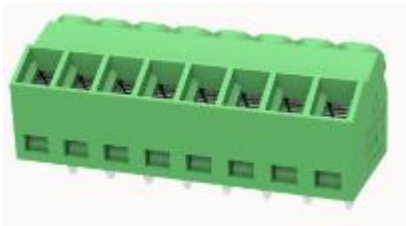


DG128-7.62

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 450V, Cross section : 2.5mm², Pitch : 7.62mm, connectoon method : Screw connector with tension sleeve, Color : green, Contact surface

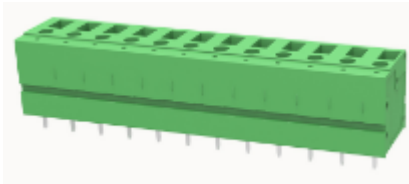


DG140R-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 630V, Cross section : 2.5mm², Pitch : 5.0mm, connectoon method : Quick plug connector, Color : orange, Contact surface

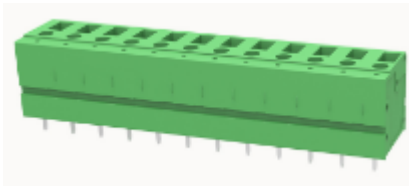


DG105R-5.0-10A

PCB terminal blocks, Rated current:24A, Rated voltage (III/2) 250V, Cross section : 2.5mm², Pitch : 5.0mm, connectoon method : Front screw connector, Color : green, Contact surface

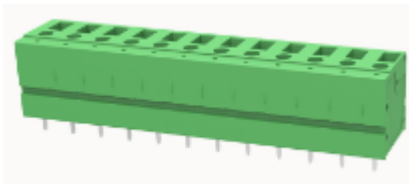

DG105V-5.0-10A

PCB terminal blocks, Rated current:24A, Rated voltage (III/2) 250V, Cross section : 2.5mm², Pitch : 5.0mm, connectoon method : Front screw connector, Color : green, Contact surface

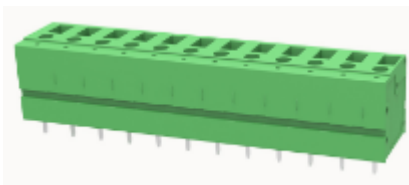

DG105V-7.5-10A

PCB terminal blocks, Rated current:24A, Rated voltage (III/2) 450V, Cross section : 2.5mm², Pitch : 7.5mm, connectoon method : Front screw connector



PS10-10A

PCB terminal blocks, Rated current: 57A, Rated voltage (III/2) 450V, Cross section: 10mm², pitch: 10.0mm, connector method: Screw connector with tension sleeve, Color: green, Contact surface



PS10-PE

PCB terminal blocks, Rated current: 57A, Rated voltage (III/2) 450V, Cross section: 10mm², pitch: 10.0mm, connector method: Screw connector with tension sleeve, Color: green-yellow, Contact surface



DG126-7.5

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 450V, Cross section: 2.5mm², pitch: 7.5mm, connector method: screw connector with wire protection, Color: green, Contact surface



DG103-5.08

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 2.5mm², pitch: 5.08mm, connector method: Screw connector with tension sleeve, Color: green, Contact surface



DG125-5.08

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 320V, Cross section: 2.5mm², pitch: 5.08mm, connectoon method: Screw connector with tension sleeve, Color: green, Contact surface



DG129-5.08

Fixed terminal block, nominal working current: 20A, rated voltage (III/2) 250V, rated cross-section: 0.5-2.5mm², pitch: 5.08mm, connection method: screw connection with crimping frame, color: green, Contact Surface: Tin



DG167R-5.0

PCB Terminal Blocks,Nominal work current : 22A,Rated voltage(III/2)250V,Rated cross section:2.5mm²,pitch:5.0mm,Connection method: screw connection with wire protection device,Color:green,Contact surface



DG332J-5.0

PCB terminal blocks,Rated current:12A,Rated voltage (III/2) 250V,pitch:5.0mm,Color:black,Contact surface



DG332JR-5.0

PCB terminal blocks,Rated current:12A,Rated voltage (III/2) 250V,pitch:5.0mm,Color:black,Contact surface



DG333J-3.5

Needle connector,Rated current:12A,Rated voltage (III/2) 250V,pitch:3.5mm,Color:black,Contact surface




DG167-5.0

PCB terminal blocks, Rated current: 22A, Rated voltage (III/2) 250V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: green, Contact surface




DG167-7.62

PCB terminal blocks, Rated current: 22A, Rated voltage (III/2) 450V, Cross section: 2.5mm², pitch: 7.62mm, Connection method: screw connection with wire




DG167R-5.0

PCB terminal blocks, Rated current: 22A, Rated voltage (III/2) 250V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: green, Contact surface




DG103-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 0.2-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG104-5.08

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG105R-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Front screw connection, Color: green, Contact surface




DG105R-7.5

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 7.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500-5.0

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500-5.08

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500-7.62

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 450V, Cross section: 1.0-2.5mm², pitch: 7.62mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500A3-5.0

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500A3-5.08

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500A-5.0

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500A-5.08

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension




DG500AA-5.08

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500H-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500HH-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500HH-5.08

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG503-5.08

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 0.2-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG504-5.08

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 400V, Cross section: 0.2-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG632-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG632R-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG635-6.35

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 450V, Cross section: 1.5-4.0mm², pitch: 6.35mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG636-6.35

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 450V, Cross section: 1.5-4.0mm², pitch: 6.35mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG636-7.62

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 630V, Cross section: 0.2-4.0mm², pitch: 7.62mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG636-9.52

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 1000V, Cross section: 0.2-4.0mm², pitch: 9.52mm, Connection method: Screw connection with tension



DG636A-6.35

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 630V, Cross section: 0.2-6.0mm², pitch: 6.35mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG636LF-7.5

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 630V, Cross section: 0.2-2.5mm², pitch: 7.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG636RF-7.5

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 630V, Cross section: 0.2-2.5mm², pitch: 7.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG636S-6.35

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 630V, Cross section: 0.2-4.0mm², pitch: 6.35mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG636S-9.52

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 1000V, Cross section: 0.2-4.0mm², pitch: 9.52mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

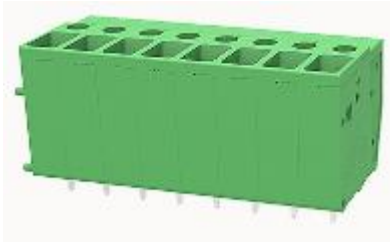

DG637-6.35

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 630V, Cross section: 0.2-4.0mm², pitch: 6.35mm, connector method: Screw connector with tension sleeve, Color: green, Contact surface



DG638-9.52

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 1000V, Cross section: 0.2-4.0mm², pitch: 9.52mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG638-9.52-DA

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 1000V, Cross section: 0.2-4.0mm², pitch: 9.52mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG107R-6.35

PCB terminal blocks, Rated current: 41A, Rated voltage (III/2) 320V, Cross section: 0.5-6mm², pitch: 6.35mm, Connection method: Front screw connection, Color: green, Contact surface



DG107V-7.62

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 630V, Cross section: 0.5-6mm², pitch: 7.62mm, Connection method: Front screw connection, Color: green, Contact surface



DG125-5.0

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG950-9.5

PCB terminal blocks, Rated current: 26A, Rated voltage (III/2) 750V, Cross section: 1.5-4.0mm², pitch: 9.5mm, Connection method: Screw connection with tension



DG127-5.0

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 0.75-1.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG127-5.08

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 0.75-1.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG127-7.62

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 450V, Cross section: 0.75-1.5mm², pitch: 7.62mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG308-2.54

PCB terminal blocks, Rated current: 8A, Rated voltage (III/2) 130V, Cross section: 1.0mm², pitch: 2.54mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG330-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG331-5.0

PCB terminal blocks, Rated current:12A, Rated voltage (III/2) 250V, Cross section:2.5mm², pitch:5.0mm, Connection method:screw connection with wire protection, Color:green, Contact surface



DG332K-5.0

PCB terminal blocks, Rated current:12A, Rated voltage (III/2) 250V, Cross section:1.5mm², pitch:5.0mm, Connection method:screw connection with wire protection, Color:green, Contact surface



DG332W-5.0

PCB terminal blocks, Rated current:12A, Rated voltage (III/2) 250V, Cross section:1.5mm², pitch:5.0mm, Connection method:screw connection with wire protection, Color:green, Contact surface



DG333K-3.5

PCB terminal blocks, Rated current:10A, Rated voltage (III/2) 250V, Cross section:1.0mm², pitch:3.5mm, Connection method:screw connection with wire protection, blue:green, Contact surface



DG335W-5.0

PCB terminal blocks, Rated current:12A, Rated voltage (III/2) 250V, Cross section:1.5mm², pitch:5.0mm, Connection method:screw connection with wire protection, Color:green, Contact surface




DG380-3.81

PCB terminal blocks, Rated current:16A, Rated voltage (III/2) 200V, Cross section:1.5mm², pitch:3.81mm, Connection method:Screw connection with tension sleeve, Color:green, Contact surface




DG380A-3.81

PCB terminal blocks, Rated current: 12A, Rated voltage (III/2) 320V, Cross section: 1.5mm², pitch: 3.81mm, Connection method: Screw connection with tension

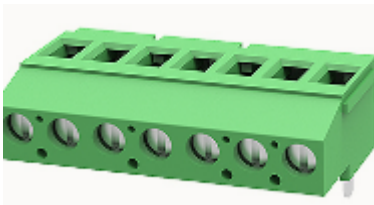


DG381-3.5

PCB terminal blocks, Rated current: 10A, Rated voltage (III/2) 130V, Cross section: 1.0mm², pitch: 3.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

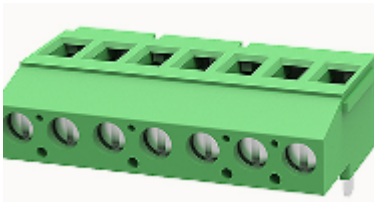


DG127HH-5.0

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 0.2-1.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

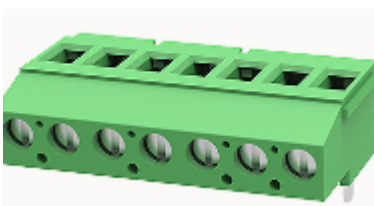


DG127R-5.0

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 0.75-1.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

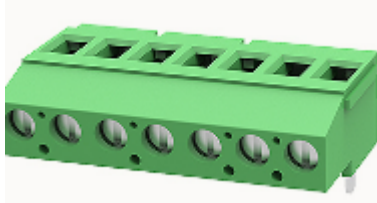


DG127R-5.08

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 0.75-1.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

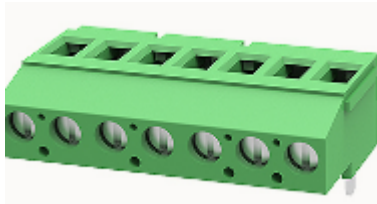


DG127S-5.0

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 0.2-1.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

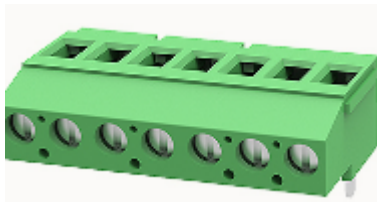


DG127S-5.08

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 0.2-1.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

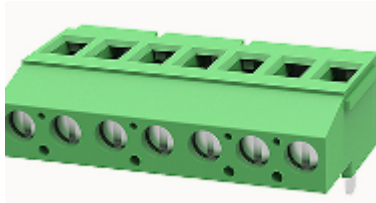


DG128-5.0

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

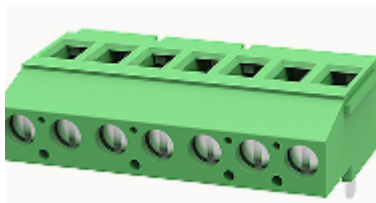


DG128-7.5

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 450V, Cross section: 1.0-2.5mm², pitch: 7.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

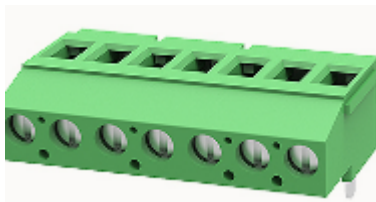


DG128R-5.0

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

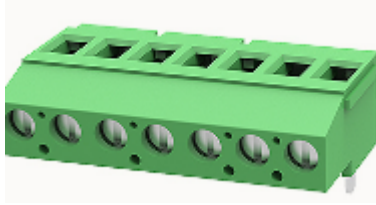


DG128R-7.5

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 450V, Cross section: 1.0-2.5mm², pitch: 7.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

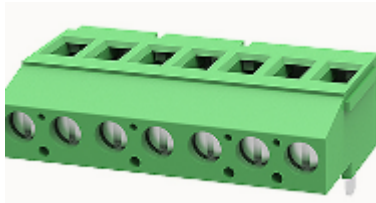


DG129-7.62

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 7.62mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

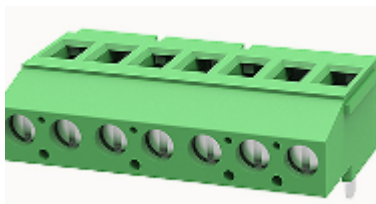


DG129R-5.0

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension




DG129R-5.08

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG129R-7.5

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 7.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG130-5.0

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG130-5.08

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG130-7.5

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 7.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG130-7.62

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 7.62mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG130A3-5.08

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG130A-5.0

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG130A-5.08

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG130H-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG135T-10.16

PCB terminal blocks, Rated current: 57A, Rated voltage (III/2) 750V, Cross section: 4-10mm², pitch: 10.16mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG136HT-10.16

PCB terminal blocks, Rated current: 65A, Rated voltage (III/2) 1000V, Cross section: 2.5-16mm², pitch: 10.16mm, Connection method: Screw connection with tension



DG136HT-12.7

PCB terminal blocks, Rated current: 65A, Rated voltage (III/2) 1000V, Cross section: 2.5-16mm², pitch: 12.7mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG136T-10.16

PCB terminal blocks, Rated current: 65A, Rated voltage (III/2) 1000V, Cross section: 2.5-16mm², pitch: 10.16mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG137T-15.0

PCB terminal blocks, Rated current: 115A, Rated voltage (III/2) 1000V, Cross section: 4-35mm², pitch: 15.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG137TM-15.0

PCB terminal blocks, Rated current: 115A, Rated voltage (III/2) 1000V, Cross section: 4-35mm², pitch: 15.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG137TM-15.0-01P

PCB terminal blocks, Rated current: 115A, Rated voltage (III/2) 1000V, Cross section: 4-35mm², pitch: 15.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG138T-10.16

PCB terminal blocks, Rated current: 76A, Rated voltage (III/2) 1000V, Cross section: 0.5-16mm², pitch: 10.16mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG381B-3.81

PCB terminal blocks, Rated current:10A, Rated voltage (III/2) 130V, Cross section:1.0mm², pitch:3.81mm, Connection method:Screw connection with tension sleeve, Color:green, Contact surface



DG381H-3.81

PCB terminal blocks, Rated current:10A, Rated voltage (III/2) 130V, Cross section:1.0mm², pitch:3.81mm, Connection method:Screw connection with tension sleeve, Color:green, Contact surface



DG381S-3.5

PCB terminal blocks, Rated current:10A, Rated voltage (III/2) 130V, Cross section:1.5mm², pitch:3.5mm, Connection method:Screw connection with tension sleeve, Color:green, Contact surface



DG381S-3.81

PCB terminal blocks, Rated current: 10A, Rated voltage (III/2) 130V, Cross section: 1.5mm², pitch: 3.81mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG381-THR-3.5

PCB terminal blocks, Rated current: 13.5A, Rated voltage (III/2) 200V, Cross section: 0.2-1.5mm², pitch: 3.5mm, Connection method: Screw connection with tension sleeve, Color: black, Contact surface




DG381-THR-3.81tape&reel package

PCB terminal blocks, Rated current: 13.5A, Rated voltage (III/2) 200V, Cross section: 0.2-1.5mm², pitch: 3.81mm, Connection method: Screw connection with tension sleeve, Color: black, Contact surface




DG381-THR-3.81

PCB terminal blocks, Rated current: 13.5A, Rated voltage (III/2) 200V, Cross section: 0.2-1.5mm², pitch: 3.81mm, Connection method: Screw connection with tension sleeve, Color: black, Contact surface




DG383-3.5

PCB terminal blocks, Rated current: 12A, Rated voltage (III/2) 160V, Cross section: 1.5mm², pitch: 3.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG381-3.81

PCB terminal blocks, Rated current: 10A, Rated voltage (III/2) 130V, Cross section: 1.0mm², pitch: 3.81mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG381A3-3.81

PCB terminal blocks, Rated current: 12A, Rated voltage (III/2) 160V, Cross section: 0.2-1.5mm², pitch: 3.81mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG381A-3.5

PCB terminal blocks, Rated current: 10A, Rated voltage (III/2) 130V, Cross section: 1.0mm², pitch: 3.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG381A-3.81

PCB terminal blocks, Rated current: 10A, Rated voltage (III/2) 130V, Cross section: 1.0mm², pitch: 3.81mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG127H-5.08

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 0.2-1.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




PS10

PCB terminal blocks, Rated current: 57A, Rated voltage (III/2) 450V, Cross section: 0.2-10mm², pitch: 10.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




PS4-7.5

PCB terminal blocks, Rated current: 32, Rated voltage (III/2) 320V, Cross section: 0.2-4.0mm², pitch: 7.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DSMT2.5-5.08

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 320V, Cross section: 0.2-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG500H-5.08

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG127A3-5.08

PCB terminal blocks, Rated current: 10A, Rated voltage (III/2) 400V, Cross section: 0.2-1.5mm², pitch: 5.08mm, Connection method: Screw connection with tension

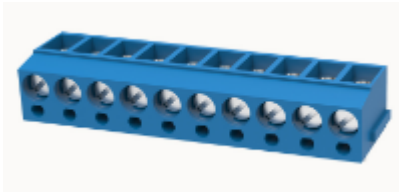


DG136T-12.7

PCB terminal blocks, Rated current: 65A, Rated voltage (III/2) 1000V, Cross section: 2.5-16mm², pitch: 12.7mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

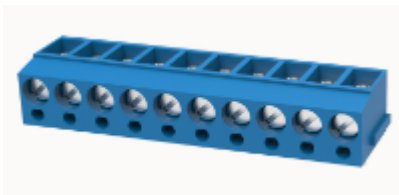


DG300R-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: blue, Contact surface

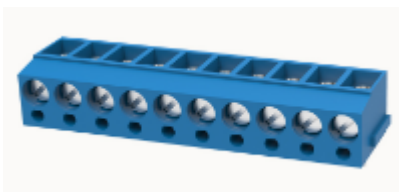


DG105V-7.5

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 7.5mm, Connection method: Front screw connection, Color: green, Contact surface

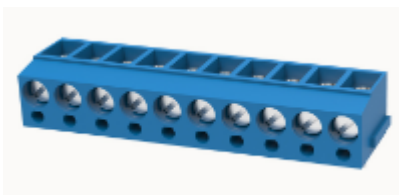


DG107R-7.62

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 630V, Cross section: 0.5-6mm², pitch: 7.62mm, Connection method: Front screw connection, Color: green, Contact surface

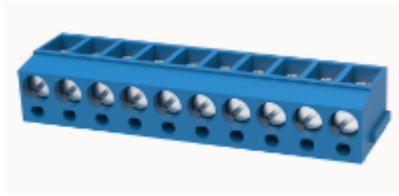


DG638-9.52-DB

PCB terminal blocks, Rated current: 32A, Rated voltage (III/2) 1000V, Cross section: 0.2-4.0mm², pitch: 9.52mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

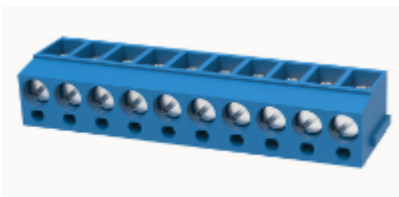


DG105V-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Front screw connection, Color: green, Contact surface

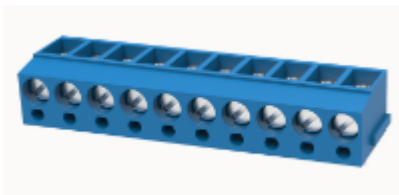


DG127A-5.0

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 0.5-1.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

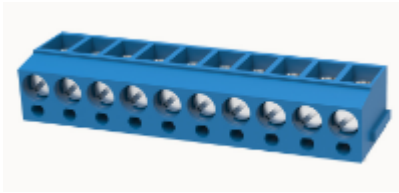


DG127A-5.08

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 0.5-1.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

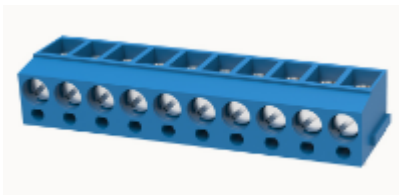


DG129R-7.62

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 7.62mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

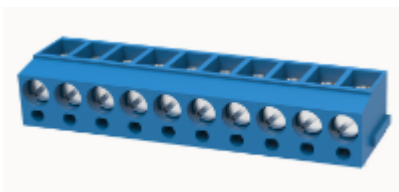


DG138T-12.7

PCB terminal blocks, Rated current: 76A, Rated voltage (III/2) 1000V, Cross section: 0.5-16mm², pitch: 12.70mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface

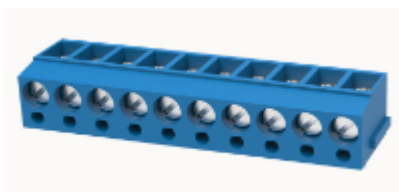

DG381-THR-3.5tape&reel package

PCB terminal blocks, Rated current: 13.5A, Rated voltage (III/2) 200V, Cross section: 0.2-1.5mm², pitch: 3.5mm, Connection method: Screw connection with tension sleeve, Color: black, Contact surface

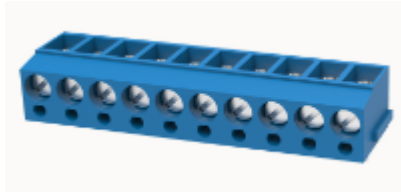

DG500AA-5.0

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension



DG500B-5.0

PCB Terminal Blocks, Nominal workcurrent: 18A, Rated voltage(III/2)250V, Rated cross section: 1.0-2.5mm², pitch: 5.0mm, Wiring method: screw connection with crimping frame, Color: green, Contact surface



DG500B-5.08

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG500BB-5.08

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 1.0-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG130LF-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 400V, Cross section: 0.2-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG130RF-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 400V, Cross section: 0.2-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG129-5.0

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 250V, Cross section: 0.5-2.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG129-7.5

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 0.5-2.5mm², pitch: 7.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG131-7.5

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 630V, Cross section: 2.5mm², pitch: 7.5mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface



DG127-THR-5.0

PCB terminal blocks, Rated current: 13.5A, Rated voltage (III/2) 320V, Cross section: 0.2-1.5mm², pitch: 5.0mm, Connection method: Screw connection with tension sleeve, Color: black, Contact surface



DG128-5.08-1000A(H)

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 400V, Cross section: 0.2-2.5mm², pitch: 5.08mm, Connection method: Screw connection with tension sleeve, Color: green, Contact surface




DG126-5.0

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: green, Contact surface




DG126R-5.0

PCB terminal blocks, Rated current:18A, Rated voltage (III/2) 250V, Cross section:2.5mm², pitch:5.0mm, Connection method:screw connection with wire

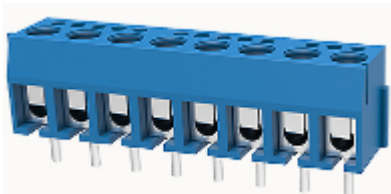


DG301-5.0

PCB terminal blocks, Rated current:17.5A, Rated voltage (III/2) 250V, Cross section:1.5mm², pitch:5.0mm, Connection method:screw connection with wire protection, Color:blue, Contact surface

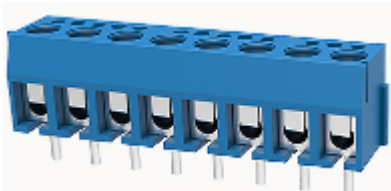


DG301R-5.0

PCB terminal blocks, Rated current:17.5A, Rated voltage (III/2) 250V, Cross section:1.5mm², pitch:5.0mm, Connection method:screw connection with wire protection, Color:blue, Contact surface

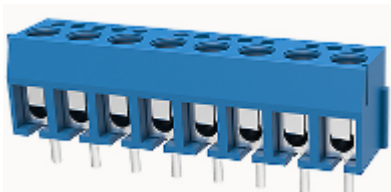


DG301S-5.0

PCB terminal blocks, Rated current: 17.5A, Rated voltage (III/2) 320V, Cross section: 1.5mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: blue, Contact surface

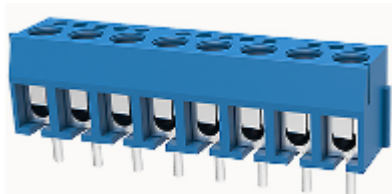


DG302-5.0

PCB terminal blocks, Rated current: 25A, Rated voltage (III/2) 250V, Cross section: 4mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: green, Contact surface

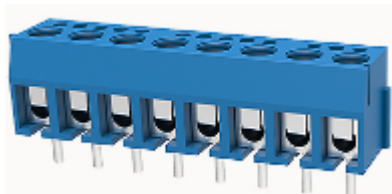


DG302-7.5

PCB terminal blocks, Rated current: 25A, Rated voltage (III/2) 450V, Cross section: 4mm², pitch: 7.5mm, Connection method: screw connection with wire protection, Color: green, Contact surface

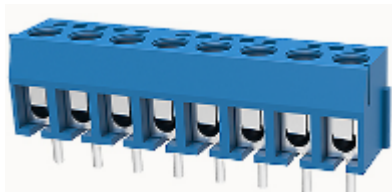


DG302R-5.0

PCB terminal blocks, Rated current: 25A, Rated voltage (III/2) 250V, Cross section: 4mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: green, Contact surface

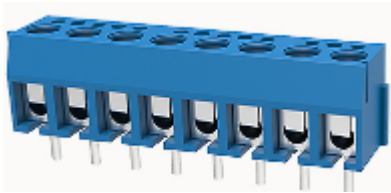


DG305-5.0

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 250V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: blue, Contact surface

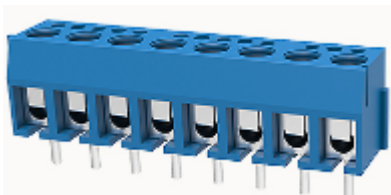


DG305-7.5

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 2.5mm², pitch: 7.5mm, Connection method: screw connection with wire protection, Color: blue, Contact surface

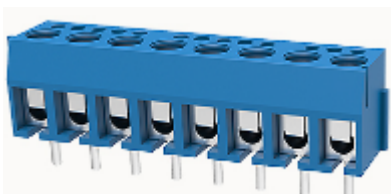


DG306-5.0

PCB terminal blocks, Rated current: 15A, Rated voltage (III/2) 250V, Cross section: 1.5mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: blue, Contact surface

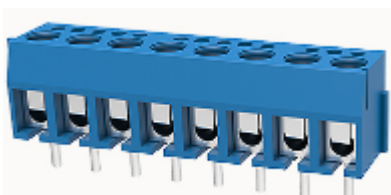


DG340-3.81

PCB terminal blocks, Rated current:10A, Rated voltage (III/2) 130V, Cross section:1.0mm², pitch:3.81mm, Connection method:screw connection with wire protection, Color:blue, Contact surface

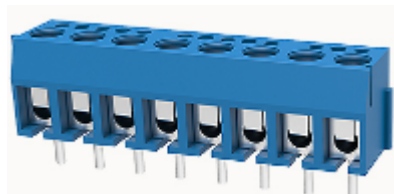

DG340R-3.81

PCB terminal blocks, Rated current:10A, Rated voltage (III/2) 130V, Cross section:1.0mm², pitch:3.81mm, Connection method:screw connection with wire protection, Color:blue, Contact surface

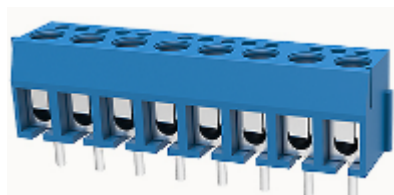


DG350-3.5

PCB terminal blocks, Rated current:10A, Rated voltage (III/2) 130V, Cross section:1.0mm², pitch:3.5mm, Connection method:screw connection with wire



DG350-3.96

PCB terminal blocks, Rated current:10A, Rated voltage (III/2) 130V, Cross section:1.0mm², pitch:3.96mm, Connection method:screw connection with wire protection, Color:blue, Contact surface



DG350R-3.5

PCB terminal blocks, Rated current:10A, Rated voltage (III/2) 130V, Cross section:1.0mm², pitch:3.5mm, Connection method:screw connection with wire protection, Color:blue, Contact surface



DG350R-3.96

PCB terminal blocks, Rated current:10A, Rated voltage (III/2) 130V, Cross section:1.0mm², pitch:3.96mm, Connection method:screw connection with wire protection, Color:blue, Contact surface



DG351R-3.5

PCB terminal blocks, Rated current:17.5A, Rated voltage (III/2) 2000V, Cross section:1.5mm², pitch:3.5mm, Connection method:screw connection with wire protection, Color:green, Contact surface



DG351V-3.5

PCB terminal blocks, Rated current: 17.5A, Rated voltage (III/2) 2000V, Cross section: 1.5mm², pitch: 3.5mm, Connection method: screw connection with wire protection, Color: green, Contact surface



DG360-7.5

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 450V, Cross section: 2.5mm², pitch: 7.5mm, Connection method: screw connection with wire protection, Color: blue, Contact surface



DG365-7.5

PCB terminal blocks, Rated current: 20A, Rated voltage (III/2) 450V, Cross section: 2.5mm², pitch: 7.5mm, Connection method: screw connection with wire protection, Color: blue, Contact surface



DG166-5.0

PCB terminal blocks, Rated current: 22A, Rated voltage (III/2) 250V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: green, Contact surface



DG300R-7.5

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 450V, Cross section: 2.5mm², pitch: 7.5mm, Connection method: screw connection with wire protection, Color: blue, Contact surface



DG300-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 250V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: screw connection with wire protection, Color: blue, Contact surface




DG300-7.5

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 450V, Cross section: 2.5mm², pitch: 7.5mm, Connection method: screw connection with wire protection, Color: blue, Contact surface



DG307-5.0

PCB terminal blocks, Rated current: 18A, Rated voltage (III/2) 250V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: screw connection with wire

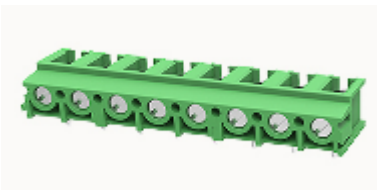

DG302R-7.5

PCB terminal blocks, Rated current: 25A, Rated voltage (III/2) 450V, Cross section: 4mm², pitch: 7.5mm, Connection method: screw connection with wire protection, Color: green, Contact surface



DG303S-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 400V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: screw connection with wire

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru>