

Клеммные колодки пружинного типа для печатных плат

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70


Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru>

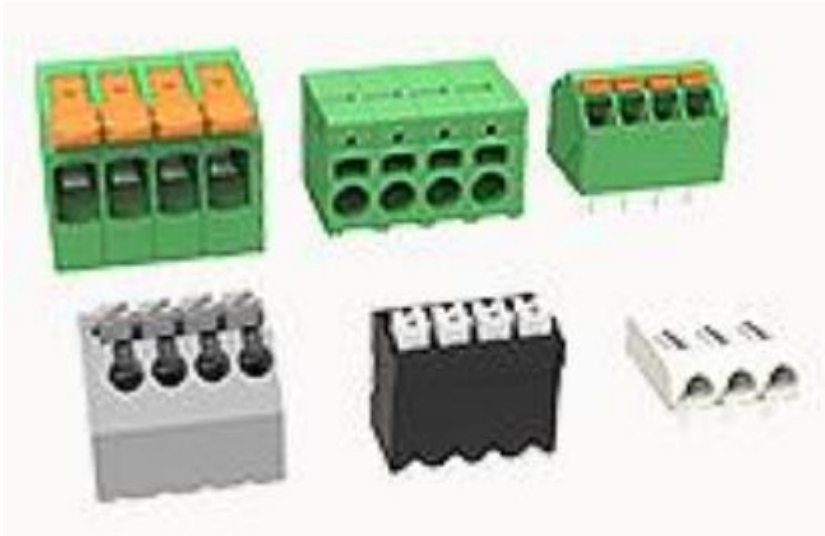

Spring Type PCB Terminal Blocks

Adopts spring cage and PUSH-IN connection technology. Spring type PCB terminal blocks provides a variety



DGPS2.5FV-5.0

PCB terminal blocks, Rated current : 20A, Rated voltage (III/2) : 400V, Cross section : 2.5mm², Pitch : 5.0mm, Connection method : PUSH-SNAP spring connection, Color : Green, Contact surface : Tin



DGPS2.5FR-5.0

PCB terminal blocks, Rated current : 20A, Rated voltage (III/2) : 400V, Cross section : 2.5mm², Pitch : 5.0mm, Connection method : PUSH-SNAP spring connection, Color : Green, Contact surface : Tin



DG266-5.0

PCB Terminal Blocks, Rated current : 10A, Rated voltage (III/2) : 320V, Cross section : 1.5mm², Connection method : Push-in spring connection, Pitch : 5.0mm, Color : Black, Contact surface : Tin



DG266-3.5

PCB Terminal Blocks, Rated current : 10A, Rated voltage (III/2) : 160V, Cross section : 1.5mm², Connection method : Push-in spring connection, Pitch:3.5mm, Color : black, Contact surface



DG212R-THR-3.81

PCB Terminal Blocks, Rated current : 17.5A, Rated voltage (III/2) : 200V, Cross section : 1.5mm², Connection method : Push-in spring connection, Pitch:3.81mm, Color : black, Contact surface



DG2204S-5.0

PCB Terminal Blocks, Rated current : 32A, Rated voltage (III/2) : 400V, Cross section : 4mm², Connection method : push-in spring connection, Pitch:5.00mm, Color : green, Contact surface



DG209-5.0

PCB Terminal Blocks, Rated current : 24A, Rated voltage (III/2) : 400V, Cross section : 2.5mm², Connection method : Push-in spring connection, Pitch:5.00mm, Color : green, Contact surface



DG2206S-7.5

PCB terminal blocks, Rated current : 41A, Rated voltage (III/2) : 1000V, Cross section : 6mm², Pitch : 7.5mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2206S-7.5-DA

PCB terminal blocks, Rated current : 41A, Rated voltage (III/2) : 1000V, Cross section : 6mm², Pitch : 7.5mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2206S-7.5-DB

PCB terminal blocks, Rated current : 41A, Rated voltage (III/2) : 1000V, Cross section : 6mm², Pitch : 7.5mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2216R-15.0

PCB terminal blocks, Rated current : 76A, Rated voltage (III/2) : 1000V, Cross section : 16mm², Pitch : 15.0mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2216R-15.0-DA

PCB terminal blocks, Rated current : 76A, Rated voltage (III/2) : 1000V, Cross section : 16mm², Pitch : 15.0mm, Connection method : Push-in spring connection, Color : Green



DG2216R-15.0-DB

PCB terminal blocks, Rated current : 76A, Rated voltage (III/2) : 1000V, Cross section : 16mm², Pitch : 15.0mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DGPS2.5R-5.0

PCB terminal blocks, Rated current : 20A, Rated voltage (III/2) : 400V, Cross section : 2.5mm², Pitch : 5.0mm, Connection method : PUSH-SNAP spring connection, Color : Green, Contact surface : Tin



DG212R-THR-3.5

PCB terminal blocks, Rated current : 17.5A, Rated voltage (III/2) : 200V, Cross section : 1.5mm², Pitch : 3.5mm, Connection method : Push-in spring connection, Color : Black, Contact surface : Tin



DG212R-THR-3.5-1000R-Tape Package

PCB terminal blocks, Rated current : 17.5A, Rated voltage (III/2) : 200V, Cross section : 1.5mm², Pitch : 3.5mm, Connection method : Push-in spring connection, Color : Black, Contact surface : Tin, Packaging : tape



DG212R-THR-5.0

PCB terminal blocks, Rated current : 17.5A, Rated voltage (III/2) : 320V, Cross section : 1.5mm², Pitch : 5.0mm, Connection method : Push-in spring connection, Color : Black, Contact surface : Tin



DG212R-THR-5.0-1000R-Tape Package

PCB terminal blocks, Rated current : 17.5A, Rated voltage (III/2) : 320V, Cross section : 1.5mm², Pitch : 5.0mm, Connection method : Push-in spring connection, Color : Black, Contact surface : Tin, Packaging : tape



DG212V-THR-3.5

PCB terminal blocks, Rated current : 17.5A, Rated voltage (III/2) : 200V, Cross section : 1.5mm², Pitch : 3.5mm, Connection method : Push-in spring connection, Color : Black, Contact surface : Tin



DG212V-THR-3.5-1000R-Tape Package

PCB terminal blocks, Rated current : 17.5A, Rated voltage (III/2) : 200V, Cross section : 1.5mm², Pitch : 3.5mm, Connection method : Push-in spring connection, Color : Black, Contact surface : Tin, Packaging : tape



DG212V-THR-5.0

PCB terminal blocks, Rated current : 17.5A, Rated voltage (III/2) : 320V, Cross section : 1.5mm², Pitch : 5.0mm, Connection method : Push-in spring connection, Color : Black, Contact surface : Tin



DG212V-THR-5.0-1000R-Tape Package

PCB terminal blocks, Rated current : 17.5A, Rated voltage (III/2) : 320V, Cross section : 1.5mm², Pitch : 5.0mm, Connection method : Push-in spring connection, Color : Black, Contact surface : Tin, Packaging : tape




DG212S-THR-3.5

PCB spring terminal blocks, Rated current: 17.5A. Rated voltage (III/2) : 160V, pitch: 3.5mm, Color: black, Contact surface



DG212S-THR-5.0

PCB spring terminal blocks, Rated current: 17.5A. Rated voltage (III/2) : 320V, pitch: 5.0mm, Color: black, Contact surface




DG248H2-5.0

PCB spring terminal blocks, Rated current: 17.5A. Rated voltage (III/2)
: 320V, pitch: 5.0mm, Color: black, Contact surface



DG271V-15.0

PCB spring terminal blocks, Rated current: 125A. Rated voltage (III/2)
: 1000V, pitch: 15.0mm, Color: green, Contact surface




2EDGKDSV-5.0

Spring Type PCB Terminal Block, nominal current 20A, Rated voltage (III/2) :
320V, pitch: 5.0mm, Color: green, Contact surface



DG2204R-5.0

PCB Terminal Blocks, Rated current : 32A, Rated voltage (III/2) : 400V, Cross section : 4mm², Pitch : 5.0mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2204V-5.0

PCB Terminal Blocks, Rated current : 32A, Rated voltage (III/2) : 400V, Cross section : 4mm², Pitch : 5.0mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2206R-7.5

PCB Terminal Blocks, Rated current : 41A, Rated voltage (III/2) : 1000V, Cross section : 6mm², Pitch : 7.5mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2206R-7.5-DA

PCB Terminal Blocks, Rated current : 41A, Rated voltage (III/2) : 1000V, Cross section : 6mm², Pitch : 7.5mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2206R-7.5-DB

PCB Terminal Blocks, Rated current : 41A, Rated voltage (III/2) : 1000V, Cross section : 6mm², Pitch : 7.5mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2206V-7.5

PCB Terminal Blocks, Rated current : 41A, Rated voltage (III/2) : 1000V, Cross section : 6mm², Pitch : 7.5mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin




DG2206V-7.5-DA

PCB Terminal Blocks, Rated current : 41A, Rated voltage (III/2) : 1000V, Cross section : 6mm², Pitch : 7.5mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2206V-7.5-DB

PCB Terminal Blocks, Rated current : 41A, Rated voltage (III/2) : 1000V, Cross section : 6mm², Pitch : 7.5mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2216R-10.0

PCB Terminal Blocks, Rated current : 76A, Rated voltage (III/2) : 1000V, Cross section : 16mm², Pitch : 10.0mm, Connection method : Push-in spring connection, Color : Green



DG2216R-10.0-DA

PCB Terminal Blocks, Rated current : 76A, Rated voltage (III/2) : 1000V, Cross section : 16mm², Pitch : 10.0mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2216R-10.0-DB

PCB Terminal Blocks, Rated current : 76A, Rated voltage (III/2) : 1000V, Cross section : 16mm², Pitch : 10.0mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2216V-10.0

PCB Terminal Blocks, Rated current : 76A, Rated voltage (III/2) : 1000V, Cross section : 16mm², Pitch : 10.0mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2216V-10.0-DA

PCB Terminal Blocks, Rated current : 76A, Rated voltage (III/2) : 1000V, Cross section : 16mm², Pitch : 10.0mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG2216V-10.0-DB

PCB Terminal Blocks, Rated current : 76A, Rated voltage (III/2) : 1000V, Cross section : 16mm², Pitch : 10.0mm, Connection method : Push-in spring connection, Color : Green, Contact surface : Tin



DG140S-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 630V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: Quick plug connection, Color: Orange, Contact surface



DG140V-5.0

PCB terminal blocks, Rated current: 24A, Rated voltage (III/2) 630V, Cross section: 2.5mm², pitch: 5.0mm, Connection method: Quick plug connection, Color: Orange, Contact surface



DGBSC-SG01/4

PCB spring terminal blocks, Rated current: 32A. Rated voltage (III/2)
: 450V, pitch: 5.6mm, Color: transparent, Contact surface



DG250-2.5

PCB spring terminal blocks, Rated current: 2A. Rated voltage (III/2)
: 250V, pitch: 2.5mm, Color: gray, Contact surface



DG250-2.5reverse pin pattern

PCB spring terminal blocks, Rated current: 2A. Rated voltage (III/2)
: 250V, pitch: 2.5mm, Color: gray, Contact surface



DG250-3.5

PCB spring terminal blocks,Rated current:10A.Rated voltage (III/2)
:320V,pitch:3.5mm,Color:gray,Contact surface



DG250-3.5reverse pin pattern

PCB spring terminal blocks,Rated current:10A.Rated voltage (III/2)
:320V,pitch:3.5mm,Color:gray,Contact surface



DG141R-2.54

PCB spring terminal blocks,Rated current:6A.Rated voltage (III/2)
:130V,pitch:2.54mm,Color:green,Contact surface



DG141V-2.54

PCB spring terminal blocks,Rated current:6A.Rated voltage (III/2)
:130V,pitch:2.54mm,Color:green,Contact surface



DG142R-5.08

PCB spring terminal blocks, Rated current: 15A. Rated voltage (III/2)
: 250V, pitch: 5.08mm, Color: green, Contact surface



DG142V-5.0

PCB spring terminal blocks, Rated current: 15A. Rated voltage (III/2)
: 320V, pitch: 5.0mm, Color: green, Contact surface



DG2001-3.0

PCB spring terminal blocks, Rated current: 3A. Rated voltage (III/2)
: 160V, pitch: 3.0mm, Color: White, Contact surface



DG2002-4.0

PCB spring terminal blocks, Rated current: 9A. Rated voltage (III/2)
: 160V, pitch: 4.0mm, Color: White, Contact surface



DG2003-6.0

PCB spring terminal blocks, Rated current: 17.5A. Rated voltage (III/2)
: 200V, pitch: 6.0mm, Color: White, Contact surface



DG202-5.0

PCB spring terminal blocks, Rated current: 16A. Rated voltage (III/2)
: 450V, pitch: 5.0mm, Color: gray, Contact surface



DG204-5.0

PCB spring terminal blocks, Rated current: 20A. Rated voltage (III/2)
: 400V, pitch: 5.0mm, Color: gray, Contact surface



DG204-7.5

PCB spring terminal blocks, Rated current: 20A. Rated voltage (III/2)
: 630V, pitch: 7.5mm, Color: gray, Contact surface



DG205-5.0

PCB spring terminal blocks, Rated current: 24A. Rated voltage (III/2)
: 320V, pitch: 5.0mm, Color: gray, Contact surface



DG208-5.0

PCB spring terminal blocks, Rated current: 9A. Rated voltage (III/2)
: 450V, pitch: 5.0mm, Color: gray, Contact surface



DG211V-5.0

PCB spring terminal blocks, Rated current: 15A. Rated voltage (III/2)
: 250V, pitch: 5.0mm, Color: gray, Contact surface



DG219-3.5

PCB spring terminal blocks,Rated current:17.5A.Rated voltage (III/2)
:320V,pitch:3.5mm,Color:gray,Contact surface



DG390-5.0

PCB spring terminal blocks,Rated current:13.5A.Rated voltage (III/2)
:250V,pitch:5.0mm,Color:blue,Contact surface



DG235-3.81

PCB spring terminal blocks,Rated current:10A.Rated voltage (III/2)
:250V,pitch:3.81mm,Color:gray,Contact surface




DG235-3.96

PCB spring terminal blocks,Rated current:10A.Rated voltage (III/2)
:250V,pitch:3.96mm,Color:gray,Contact surface




DG235-5.0

PCB spring terminal blocks, Rated current:17.5A. Rated voltage (III/2)
:320V, pitch:5.0mm, Color:gray, Contact surface

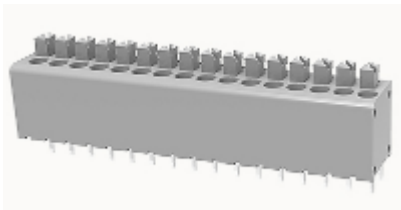


DG235-7.5

PCB spring terminal blocks, Rated current:17.5A. Rated voltage (III/2)
:1000V, pitch:7.5mm, Color:gray, Contact surface

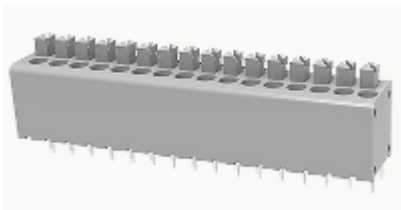


DG235T-10.0

PCB spring terminal blocks, Rated current:10A. Rated voltage (III/2)
:250V, pitch:10.0mm, Color:gray, Contact surface

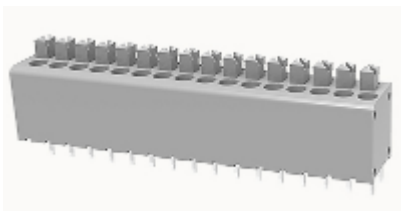


DG235W-3.81

PCB spring terminal blocks,Rated current:10A.Rated voltage (III/2)
:250V,pitch:3.81mm,Color:gray,Contact surface

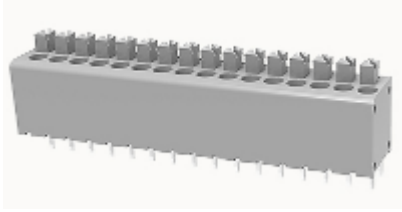


DG235W-5.0

PCB spring terminal blocks,Rated current:17.5A.Rated voltage (III/2)
:320V,pitch:5.0mm,Color:gray,Contact surface

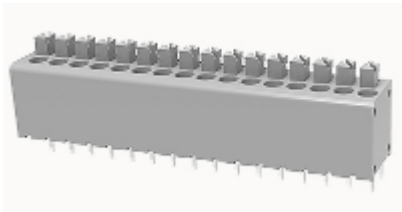

DG235W-7.5

PCB spring terminal blocks,Rated current:17.5A.Rated voltage (III/2)
:320V,pitch:7.5mm,Color:gray,Contact surface

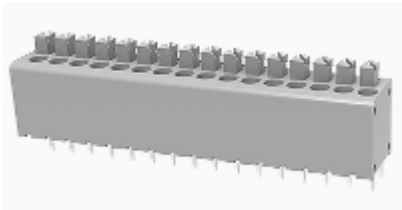

DG236-3.81

PCB spring terminal blocks,Rated current:10A.Rated voltage (III/2)
:200V,pitch:3.81mm,Color:gray,Contact surface



DG236-5.0

PCB spring terminal blocks, Rated current:10A. Rated voltage (III/2)
:400V, pitch:5.0mm, Color:gray, Contact surface



DG237-5.08

PCB spring terminal blocks, Rated current:10A. Rated voltage (III/2)
:320V, pitch:5.08mm, Color:green, Contact surface



DG238-10.0

PCB spring terminal blocks, Rated current:24A. Rated voltage (III/2)
:450V, pitch:10.0mm, Color:white, Contact surface



DG240-2.54

PCB spring terminal blocks,Rated current:6A.Rated voltage (III/2)
:130V,pitch:2.54mm,Color:Orange ,Contact surface



DG220A-2.1

PCB spring terminal blocks,Rated current:13.5A.Rated voltage (III/2)
:130V,pitch:2.1mm,Color:gray,Contact surface



DG222-8.0

PCB spring terminal blocks,Rated current:24A.Rated voltage (III/2)
:450V,pitch:8.0mm,Color:gray,Contact surface



DG224-8.0

PCB spring terminal blocks,Rated current:24A.Rated voltage (III/2)
:450V,pitch:8.0mm,Color:gray,Contact surface



DG235-10.0

PCB spring terminal blocks, Rated current: 17.5A. Rated voltage (III/2)
: 1000V, pitch: 10.0mm, Color: gray, Contact surface



DG240W-2.54

PCB spring terminal blocks, Rated current: 6A. Rated voltage (III/2)
: 130V, pitch: 2.54mm, Color: Orange, Contact surface



DG242V-10.0

PCB spring terminal blocks, Rated current: 17A. Rated voltage (III/2)
: 1000V, pitch: 10.0mm, Color: gray, Contact surface



DG242V-5.0

PCB spring terminal blocks,Rated current:17A.Rated voltage (III/2)
:450V,pitch:5.0mm,Color:gray,Contact surface




DG242V-7.5

PCB spring terminal blocks,Rated current:17A.Rated voltage (III/2)
:750V,pitch:7.5mm,Color:gray,Contact surface



DG242V-7.62

PCB spring terminal blocks,Rated current:17A.Rated voltage (III/2)
:750V,pitch:7.62mm,Color:gray,Contact surface



DG243-5.0

PCB spring terminal blocks,Rated current:17A.Rated voltage (III/2)
:450V,pitch:5.0mm,Color:gray,Contact surface




DG245-10.0

PCB spring terminal blocks, Rated current: 17A. Rated voltage (III/2)
: 1000V, pitch: 10.0mm, Color: gray, Contact surface




DG245-5.0

PCB spring terminal blocks, Rated current: 17A. Rated voltage (III/2)
: 450V, pitch: 5.0mm, Color: gray, Contact surface




DG245-7.5

PCB spring terminal blocks, Rated current: 17A. Rated voltage (III/2)
: 750V, pitch: 7.5mm, Color: gray, Contact surface



DG245-7.62

PCB spring terminal blocks, Rated current: 17A. Rated voltage (III/2)
: 750V, pitch: 7.62mm, Color: gray, Contact surface




DG245H2-5.0

PCB spring terminal blocks, Rated current: 18A. Rated voltage (III/2)
: 450V, pitch: 5.0mm, Color: gray, Contact surface




DG246-3.81

PCB spring terminal blocks, Rated current: 9A. Rated voltage (III/2)
: 160V, pitch: 3.81mm, Color: green, Contact surface



DG246-5.08

PCB spring terminal blocks, Rated current: 9A. Rated voltage (III/2)
: 320V, pitch: 5.08mm, Color: green, Contact surface



DG271R-7.5

PCB spring terminal blocks, Rated current: 41A. Rated voltage (III/2)
: 1000V, pitch: 7.5mm, Color: green, Contact surface




DG271V-10.0-DB

PCB spring terminal blocks, Rated current: 76A. Rated voltage (III/2)
: 1000V, pitch: 10.0mm, Color: green, Contact surface




DG271V-7.5-DB

PCB spring terminal blocks, Rated current: 41A. Rated voltage (III/2)
: 1000V, pitch: 7.5mm, Color: green, Contact surface

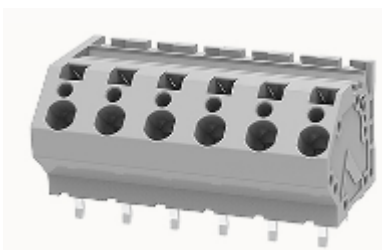


DG250-7.0

PCB spring terminal blocks,Rated current:10A.Rated voltage (III/2)
:630V,pitch:7.0mm,Color:gray,Contact surface

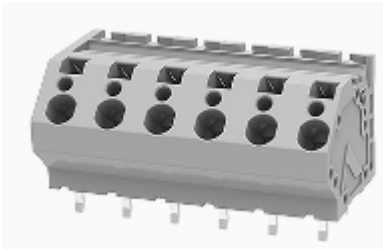


DG250-7.0reverse pin pattern

PCB spring terminal blocks,Rated current:10A.Rated voltage (III/2)
:630V,pitch:7.0mm,Color:gray,Contact surface

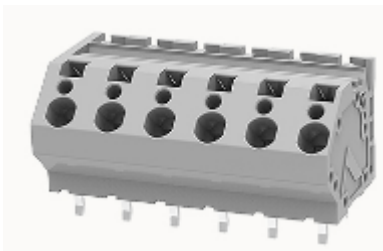


DG250T-5.0

PCB spring terminal blocks,Rated current:12A.Rated voltage (III/2)
:450V,pitch:5.0mm,Color:gray,Contact surface

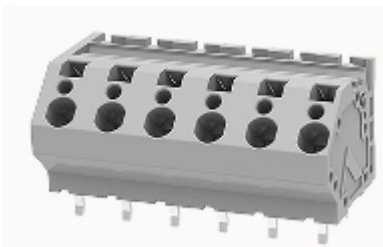


DG250W-3.5

PCB spring terminal blocks,Rated current:3A.Rated voltage (III/2)
:250V,pitch:3.5mm,Color:gray,Contact surface

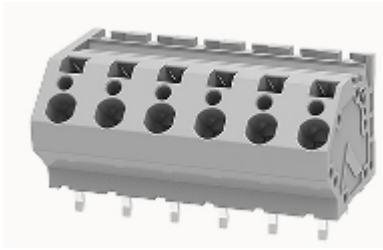


DG260-7.5

PCB spring terminal blocks, Rated current: 32A. Rated voltage (III/2)
: 630V, pitch: 7.5mm, Color: green, Contact surface

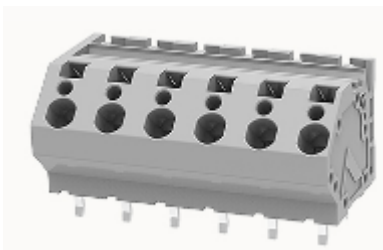


DG262-5.0

PCB spring terminal blocks, Rated current: 32A. Rated voltage (III/2)
: 320V, pitch: 5.0mm, Color: gray, Contact surface

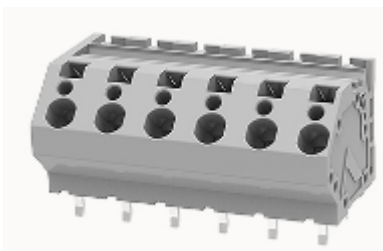


DG262-7.5

PCB spring terminal blocks, Rated current: 32A. Rated voltage (III/2)
: 320V, pitch: 7.5mm, Color: gray, Contact surface

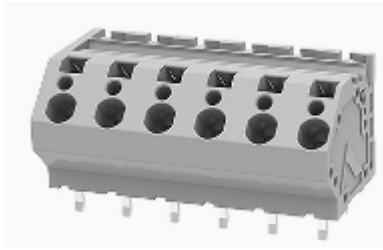


DG263-7.5

PCB spring terminal blocks, Rated current: 41A. Rated voltage (III/2)
: 630V, pitch: 7.5mm, Color: gray, Contact surface

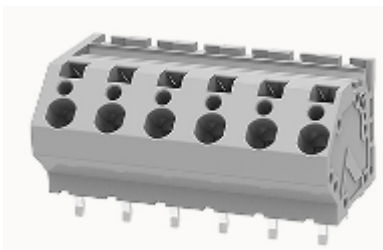


DG264-10.0

PCB spring terminal blocks, Rated current: 76A. Rated voltage (III/2)
: 320V, pitch: 10.0mm, Color: gray, Contact surface

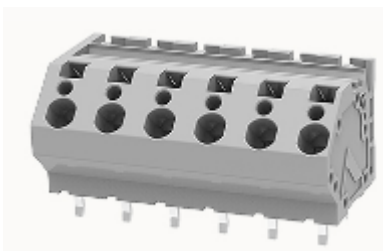


DG264-15.0

PCB spring terminal blocks, Rated current: 76A. Rated voltage (III/2)
: 1000V, pitch: 15.0mm, Color: gray, Contact surface

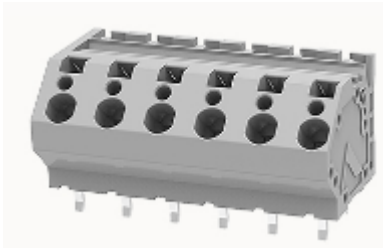

DG270-10.0

PCB spring terminal blocks, Rated current: 76A. Rated voltage (III/2)
: 400V, pitch: 10.0mm, Color: green, Contact surface

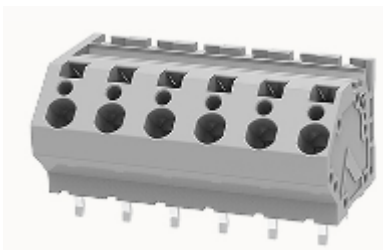

DG228-3.5

PCB spring terminal blocks, Rated current: 24A. Rated voltage (III/2)
: 450V, pitch: 3.5mm, Color: transparent, Contact surface



DG2002-4.0-300A(H)

PCB spring terminal blocks, Rated current: 9A. Rated voltage (III/2)
: 160V, pitch: 4.0mm, Color: White, Contact surface



DG202-10.0

PCB spring terminal blocks, Rated current:16A. Rated voltage (III/2)
:750V, pitch:10.0mm, Color:gray, Contact surface



DG211R-2.5

PCB spring terminal blocks, Rated current:3A. Rated voltage (III/2)
:160V, pitch:2.5mm, Color:gray, Contact surface



DG211R-5.0

PCB spring terminal blocks, Rated current:15A. Rated voltage (III/2)
:250V, pitch:5.0mm, Color:gray, Contact surface



DG234-5.0

PCB spring terminal blocks, Rated current:10A. Rated voltage (III/2)
:320V, pitch:5.0mm, Color:gray, Contact surface



DG235T-5.0

PCB spring terminal blocks, Rated current:10A. Rated voltage (III/2)
:250V, pitch:5.0mm, Color:gray, Contact surface



DG242R-10.0

PCB spring terminal blocks, Rated current:17A. Rated voltage (III/2)
:1000V, pitch:10.0mm, Color:gray, Contact surface



DG243-10.0

PCB spring terminal blocks, Rated current:17A. Rated voltage (III/2)
:1000V, pitch:10.0mm, Color:gray, Contact surface



DG245-5.08

PCB spring terminal blocks, Rated current: 17A. Rated voltage (III/2)
: 320V, pitch: 5.08mm, Color: gray, Contact surface



DG245H3-5.0

PCB spring terminal blocks, Rated current: 18A. Rated voltage (III/2)
: 450V, pitch: 5.0mm, Color: gray, Contact surface




DG245H4-5.0

PCB spring terminal blocks, Rated current: 18A. Rated voltage (III/2)
: 450V, pitch: 5.0mm, Color: gray, Contact surface




DG260-10.0

PCB spring terminal blocks, Rated current: 32A. Rated voltage (III/2)
: 630V, pitch: 10.0mm, Color: green, Contact surface




DG271R-10.0

PCB spring terminal blocks, Rated current: 76A. Rated voltage (III/2)
: 1000V, pitch: 10.0mm, Color: green, Contact surface




DG271R-10.0-DA

PCB spring terminal blocks, Rated current: 76A. Rated voltage (III/2)
: 1000V, pitch: 10.0mm, Color: green, Contact surface




DG271V-10.0

PCB spring terminal blocks,Rated current:76A.Rated voltage (III/2)
:1000V,pitch:10.0mm,Color:green,Contact surface




DG271V-10.0-DA

PCB spring terminal blocks,Rated current:76A.Rated voltage (III/2)
:1000V,pitch:10.0mm,Color:green,Contact surface




DG271V-5.0

PCB spring terminal blocks,Rated current:24A.Rated voltage (III/2)
:400V,pitch:5.0mm,Color:green,Contact surface



DG271V-7.5

PCB spring terminal blocks,Rated current:41A.Rated voltage (III/2)
:1000V,pitch:7.5mm,Color:green,Contact surface



DG271V-7.5-DA

PCB spring terminal blocks, Rated current: 41A. Rated voltage (III/2)
: 1000V, pitch: 7.5mm, Color: green, Contact surface



DG142R-7.62

PCB spring terminal blocks, Rated current: 15A. Rated voltage (III/2)
: 450V, pitch: 7.62mm, Color: green, Contact surface



DG142V-5.08

PCB spring terminal blocks, Rated current: 15A. Rated voltage (III/2)
: 250V, pitch: 5.08mm, Color: green, Contact surface



DG142V-7.62

PCB spring terminal blocks, Rated current:15A. Rated voltage (III/2)
:450V, pitch:7.62mm, Color:green, Contact surface



DG2002-4.0-300R(H)

PCB spring terminal blocks, Rated current:9A. Rated voltage (III/2)
:160V, pitch:4.0mm, Color:White, Contact surface



DG202-7.5

PCB spring terminal blocks, Rated current:16A. Rated voltage (III/2)
:450V, pitch:7.5mm, Color:gray, Contact surface



DG208-3.5

PCB spring terminal blocks, Rated current:9A. Rated voltage (III/2)
:320V, pitch:3.5mm, Color:gray, Contact surface



DG235T-7.5

PCB spring terminal blocks, Rated current: 10A. Rated voltage (III/2)
: 250V, pitch: 7.5mm, Color: gray, Contact surface



DG235W-10.0

PCB spring terminal blocks, Rated current: 17.5A. Rated voltage (III/2)
: 320V, pitch: 10.0mm, Color: gray, Contact surface



DG236-7.5

PCB spring terminal blocks, Rated current: 17.5A. Rated voltage (III/2)
: 250V, pitch: 7.5mm, Color: gray, Contact surface



DG241-2.5

PCB spring terminal blocks, Rated current: 6A. Rated voltage (III/2)
: 130V, pitch: 2.5mm, Color: Orange, Contact surface



DG241-2.54

PCB spring terminal blocks, Rated current: 6A. Rated voltage (III/2)
: 130V, pitch: 2.54mm, Color: Orange, Contact surface



DG242R-5.0

PCB spring terminal blocks, Rated current: 17A. Rated voltage (III/2)
: 450V, pitch: 5.0mm, Color: gray, Contact surface



DG242R-7.5

PCB spring terminal blocks, Rated current: 17A. Rated voltage (III/2)
: 750V, pitch: 7.5mm, Color: gray, Contact surface



DG242V-5.08

PCB spring terminal blocks, Rated current: 17A. Rated voltage (III/2)
: 450V, pitch: 5.08mm, Color: gray, Contact surface



DG243-7.5

PCB spring terminal blocks, Rated current: 17A. Rated voltage (III/2)
: 750V, pitch: 7.5mm, Color: gray, Contact surface



DG245H3-7.5

PCB spring terminal blocks, Rated current: 21A. Rated voltage (III/2)
: 630V, pitch: 7.5mm, Color: gray, Contact surface



DG250W-3.5reverse pin pattern

PCB spring terminal blocks, Rated current: 3A. Rated voltage (III/2)
: 250V, pitch: 3.5mm, Color: gray, Contact surface



DG271R-10.0-DB

PCB spring terminal blocks, Rated current: 76A. Rated voltage (III/2)
: 1000V, pitch: 10.0mm, Color: green, Contact surface



DG271R-7.5-DA

PCB spring terminal blocks, Rated current: 41A. Rated voltage (III/2)
: 1000V, pitch: 7.5mm, Color: green, Contact surface



DG271R-7.5-DB

PCB spring terminal blocks, Rated current: 41A. Rated voltage (III/2)
: 1000V, pitch: 7.5mm, Color: green, Contact surface



DG295-4.57

PCB spring terminal blocks, Rated current: 5A. Rated voltage (III/2)
: 250V, pitch: 4.57mm, Color: White, Contact surface



DG220B-2.1

PCB spring terminal blocks, Rated current: 6A. Rated voltage (III/2)
: 320V, pitch: 2.1mm, Color: gray, Contact surface



DG263-10.0

PCB spring terminal blocks,Rated current:41A.Rated voltage (III/2)
:1000V,pitch:10.0mm,Color:gray,Contact surface



DG270-10.0-DA

Spring Type PCB Terminal Block,nominal current76A,Rated voltage(III/2) :
1000V,pitch:10.0mm,Color:green,Contact surface



DG270-10.0-DB

PCB spring terminal blocks,Rated current:76A.Rated voltage (III/2)
:1000V,pitch:10.0mm,Color:green,Contact surface



DG271V-3.5

PCB spring terminal blocks,Rated current:17.5A.Rated voltage (III/2)
:200V,pitch:3.5mm,Color:green,Contact surface



DG271R-3.5

PCB spring terminal blocks, Rated current: 17.5A. Rated voltage (III/2)
: 200V, pitch: 3.5mm, Color: green, Contact surface



DG271R-5.0

PCB spring terminal blocks, Rated current: 24A. Rated voltage (III/2)
: 400V, pitch: 5.0mm, Color: green, Contact surface

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru>