

КАТАЛОГ

на клеммные колодки din-рейки

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47


эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru/>

DEGSON-Global Industrial Connector Manufacturer, Providing Customized Solution To All Partners.



DIN Rail Terminal Blocks And Accessories System

DIN Rail Terminal Blocks And Accessories System

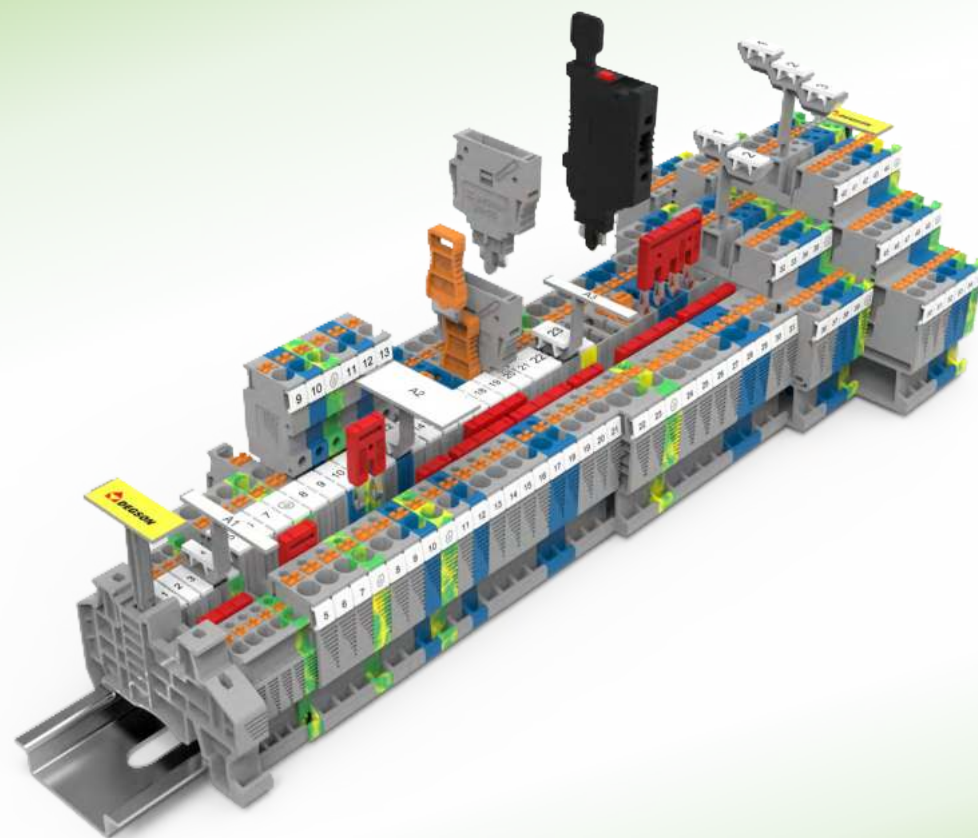


BRIEF INTRODUCTION

Founded in 1990, DEGSON is a global solution provider of electrical, electronic and industrial connectors. As a National High-tech enterprise, DEGSON owns the UL and VDE certified laboratory. The company achieved ISO9001, ISO14001, ISO80079-34, ISO/TS22163 and IATF16949 management system certifications.

DEGSON is engaged in supplying highly reliable and durable products to serve global customers. The company has a market-leading capability of mould processing, automatic manufacturing and advanced testing. DEGSON has the complete engineering ability to support global customers with the professional customization solution and value-added service.

DEGSON products are widely recognized in China, the USA, Germany, the UK, Italy, Spain, Turkey, Russia, Japan, South Korea, Singapore, etc. totally hundred countries and regions. DEGSON supply high quality products and provide professional services globally in the industry sectors likely industrial automation, instrument, electric power, railway, marine and offshore, new energy, elevator, lighting, security, machinery, etc. The company won the recognition from partners among Fortune 500 and industry leading enterprises.

Based on the business philosophy of "pragmatic innovation, responsibility, integrity, harmonious development, regulation and win-win", DEGSON continuously integrates professional technical resources, R&D innovation, product manufacturing and technology application capabilities. Relying on global sales network, DEGSON aims to supply series of multiple varieties of high-quality products and services. We provide global customers with professional and quick connected application solutions, help customers continue to create value. DEGSON is making contributions to creating a smart and interconnected world.



1 2
3

- ① The general manager of UL global energy & technology division visit our company
- ② Sven Ohrke, President of VDE global services, comes to DEGSON to discuss strategic cooperation
- ③ VDE Laboratory Accreditation: In July 2010, VDE Issued the "VDE Authorized Laboratory" Certificate to DEGSON's laboratory.
UL laboratory accreditation: UL formally issued "UL WTDPP" certification to DEGSON in March 2013.
On April, 2016, UL-CTDP.
On December, 2016, VDE-TDAP.
On January, 2017, Pass IRIS system audit.

DIN Rail terminal block series

DS Push-in series	01-58
WS Spring-cage series	59-102
DC Steel screw series	103-146
PC Brass screw series	147-188
BS Bolt connection series	189-192

Accessories & marking system

Marking system	193-196
Terminal blocks marker	197-213
Cable marker	214-215
Device marker	216-218
Accessories	219-224

Customized products series

DIN Rail terminal blocks customized products	225-238
Enclosures customized products	239-240
Customization capability	241-246

Testing standard of DIN Rail terminal blocks

Testing standard of DIN Rail terminal blocks	247-278
--	---------

Product Index

DS Push-in series

05-08

DS1.5 Series



09-12

DS1.5 Series



14-17

DS2.5 Series



18-22

DS2.5 Series



24-26

DS4 Series



27-28

DS4 Series



30-32

DS6 Series



34-35

DS10 Series



37-38

DS16 Series



40-41

Fuse Terminal Blocks



43-45

Disconnect Terminal Blocks



47

Plug-in



50-53

DSIO sensor terminal blocks and actuator terminal blocks



55-57

Component terminal blocks



WS Spring-cage series

63-66

WS1.5 Series



67-68

WS1.5 Series



70-72

WS2.5 Series



73-76

WS2.5 Series



77-78

WS2.5 Series



WS2.5T-DIN15 WS2.5T-DIN35 WS2.5T-MID-CO WS2.5T-END-CO

80-84

WS4 Series



WS4 WS4-PE WS4-DB WS4-TW WS4-TW-PE WS4-QU WS4-QU-PE WS4T-DB

86-87

WS6 Series



WS6 WS6-PE WS6-TW WS6-TW-PE

89-90

WS10 Series



WS10 WS10-PE WS10-TW WS10-TW-PE

92-93


WS16 Series



WS16 WS16-PE WS16-TW WS16-TW-PE

95

WS35 Series



WS35 WS35-PE

97

Inclined
Feed-through
Terminal
Blocks



WS2.5-TW-TA WS2.5-TW-TA-PE

99-100

Fuse Terminal
Blocks



WSF4-TA WSF4-TA-08A(H) WSF4-TA-10A(H)

102

Component
Terminal
Blocks



WS2.5-QU-LD-L-R WS2.5-QU-LD-R-L

DC Steel screw series

107-109

DC2.5 Series



DC2.5 DC2.5-PE DC2.5-TW DC2.5-TW-PE

111-113

DC2.5 Series



DC2.5-QU DC2.5-QU-PE DCKKB2.5 DCKKB2.5-PV DCKKB2.5-PE

117-120

DC4 Series



DC4 DC4-PE DC4-TW DC4-TW-PE DC4-QU DC4-QU-PE

121-122

DC4 Series



DCKKB4 DCKKB4-PV DCKKB4-PE

126

DC6 Series



DC6 DC6-PE

128-132

DC10 Series



DC10 DC10-PE DC10-TW DC10-TW-PE DCKKB10 DCKKB10-PV

134-136

WS16 Series
WS35 Series



DC16 DC16-PE DC35 DC35-PE

137-139

WS50 Series
WS95 Series



DC50 DC50-PE DC95

141-142

Fuse Terminal
Blocks



DC4-HE DC4-HE-LD24 DC4-HE-LD250

144-146

Disconnect
Terminal Blocks/
Test Disconnect
Terminal Block



DC4-MT DC4-TG DCTK6

PC Brass screw series

151
PC1.5 Series



PC1.5

153-157
PC2.5 Series



PC2.5



PC2.5-PE



PC2.5-TW



PC2.5-TW-PE



PCDK2.5



PCDK2.5-PE



PCKK2.5



PCKK2.5-PV

159-162
PC4 Series



PC4



PC4-PE



PC4-TW



PC4-TW-PE



PCDK4



PCDK4-PE



PCKK4



PCKK4-PE

164-166
PC6 Series
PC10 Series



PC6



PC6-PE



PC10



PC10-PE

168-172
PC16 Series
PC35 Series



PC16



PC16-PE



PC35



PC35-PE

174-177
PC50 Series
PC95 Series



PC50



PC50-PE



PC95

179-180
Micro And
Miniature
Terminal Blocks



PCMB2.5



PCMB4

182-183
Fuse Terminal
Blocks



PC4-HE



PC10-DR

185-186
Disconnect
Terminal Blocks



PCMT2.5



PCMT4

188
Test Disconnect
Terminal Block



PCTK6



PCTK6-BEN

BS Bolt connection series

191-192
BS8 Series
BS10 Series



BS8



BS8 N



BS10



BS10 N

Accessories & marking system

196
Marking system



The Vario plotter



PTT thermal transfer printer

198-207
Terminal block
markers



ZC Series



ZS Series



ZSF Series



ZB Series



ZK Series



ZT Series



WB Series



DEK Series

208-213
Terminal block
markers



ZW Series



DTH Marker Carrier



DMTH Marker Bracket



Terminal Blocks Marker



DBE-1 Terminal Blocks Marker



DBE-2 Terminal Blocks Marker



DLM Terminal Blocks Marker



Warning Marker

215
Cable markers



Mark Sleeves



Thermal Casing

217-218
Device
markers



Self-adhesive device markers for buttons



DML Self-adhesive device markers



Self-adhesive PVC device markers, High flexibility



Self-adhesive device marking, high temperature

220-224
Accessories



DIN rail NS15, short type



DIN rail NS35, short type



Snap-in End Stopper



Neutral Bus Bar



Neutral Bus Bar Bracket



Shield Terminal



L/N/PE Terminal Block



Wire Slot

Customized products series

228
Drawer Terminal
Block



DS2.5PH-16P



DS2.5PH-24P

DIN Rail Terminal Blocks

229-231

WS1.5 Series
WS4 Series



WS1.5-SD WS2.5-SD WS2.5-SD-PE WS4-SD

232-233

WS6 Series
WS10 Series



WS6-SD WS6-SD-PE WS10-SD WS10-SD-PE

234

WS16 Series



WS16-SD WS16-SD-PE

235

Plug-in




WS2.5P WS2.5P-PE

236-238

PC16 Series
PC35 Series



PC10-105A(H) PC16-105A(H) PC35-105A(H)

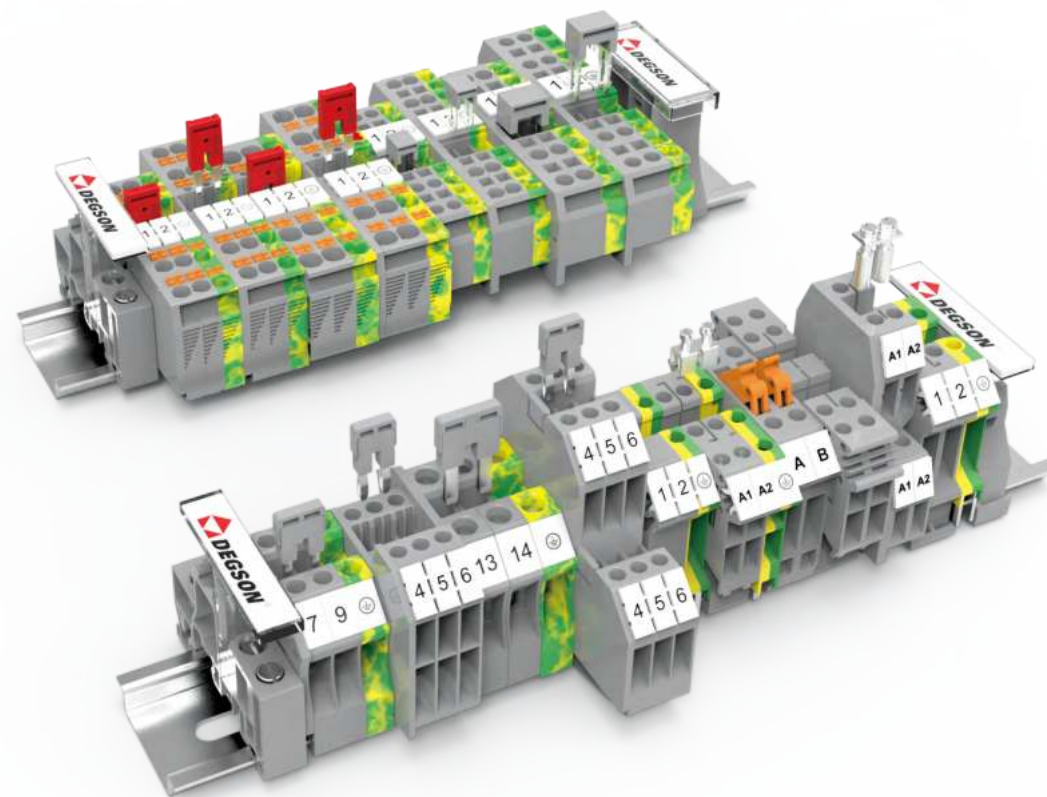

HOW TO ORDER

DS1.5 0 1 P 1 1 0 0 A(H)

Series No.

No. of Pole

1 Single pitch
2 Double pitch

Color

1	Grey
2	Blue
3	Black
4	Green
5	Orange
6	Red
7	Transparent
8	Yellow
9	White
C	Yellow Green Mixed Color

EG:



DS2.5-01P-11-00A(H)




WS2.5-01P-11-00A(H)




DS Spring Push-in Structure

Feature

- Push-in connection technology, tool-free operation, more convenient and fast
- With orange buttons, use slotted screw or Philip's screwdriver can release the wire
- Double channel for bridging can make circuit connection test more flexible.
- Unique pluggable jumper, high circuit connection efficiency
- Optional marker to avoid wire mis-inserting
- Equipped with test holes for easy test circuit

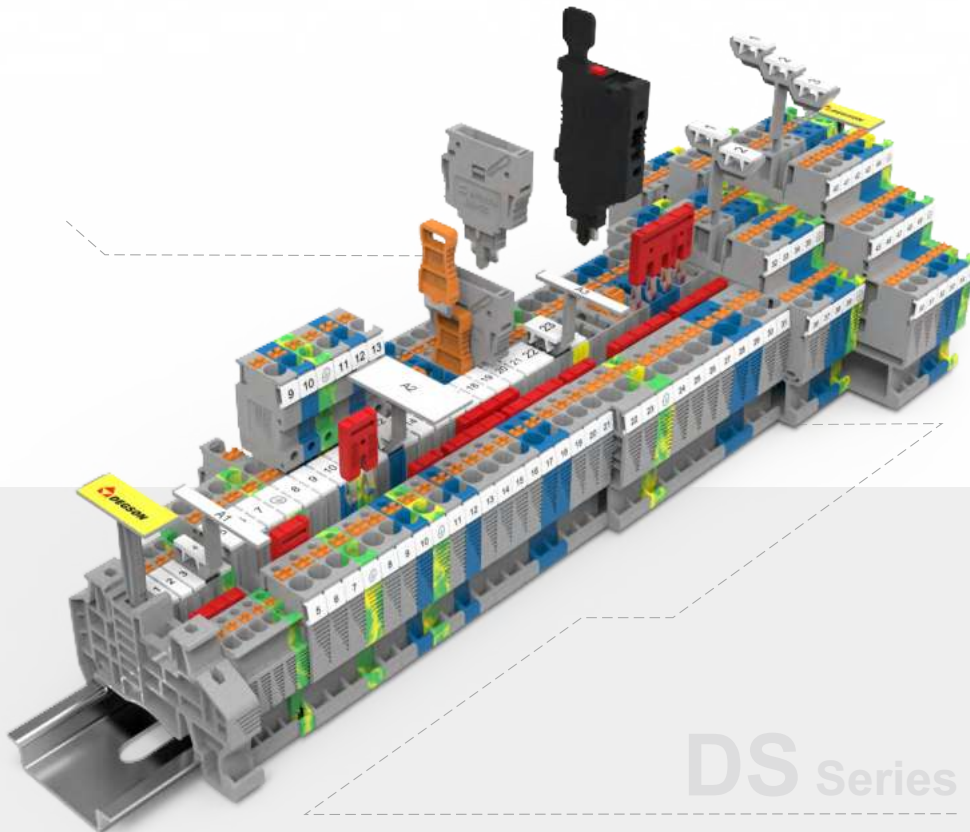


DS Series

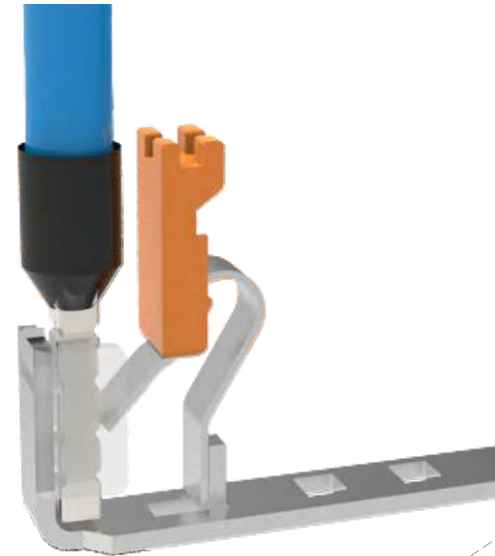


DS push-in connection technology terminal blocks, imported stainless steel spring, unique production process can ensure excellent resilience and vibration resistance of the wiring. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66 plastic parts can meet the working environment of -40°C to 105°C, and all DS series of din rail products are in line with UL94 V0 flame retardant grade. The push-in spring structure design greatly improves the connection efficiency. Solid wire or stranded wire processed by terminals can be inserted directly without tools.

DS Feed-through Terminal Blocks

- DS Feed-through DIN Rail terminal blocks can reach tool free wiring with the Push-in connection technology; Easy to remove the cable by push the orange button
- Multi-deck terminal block, space saving, three-deck with ground protective terminal block, suitable for motor connection
- Double-channel bridging design and 2-20 poles bridges reach the flexible distribution of potentials
- Compatible with the marking system to clearly identify the working area position, easy to test the circuit

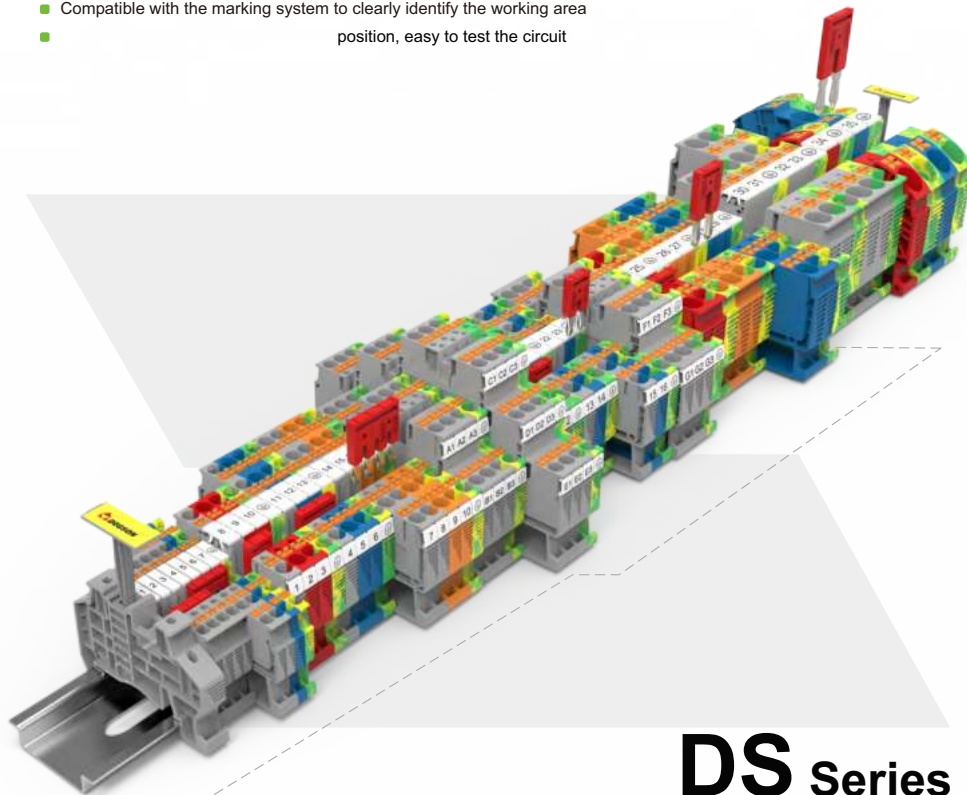

DS Series

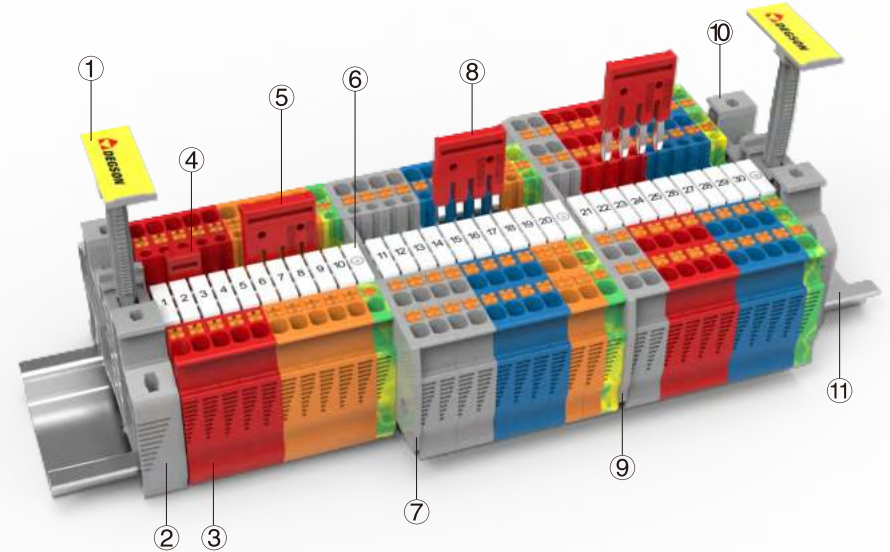


Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	DS1.5-01P-11-00A(H)	Push-in type 1.5mm ² DIN Rail terminal blocks
④ Pluggable bridges	DFB2-3.5-16-00A(H)	02P bridge, use for DS1.5 series
⑤ Pluggable bridges	DFB4-3.5-16-00A(H)	04P bridge, use for DS1.5 series
⑥ Marker	ZB3.5-10P-19-00A(H)	Marker is used for the top of DS1.5 series
⑦ End cover	D-DS1.5-TW-01P-11-00A(H)	End cover is used for DS1.5-TW&DS1.5-TW-PE
⑧ Pluggable bridges	DFB4-3.5-16-00A(H)	04P bridge, use for DS1.5 series
⑨ End cover	D-DS1.5-QU-01P-11-00A(H)	End cover is used for DS1.5-QU&DS1.5-QU-PE
⑩ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑪ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		— — Fuse connection		⏏ Disconnecting
	• Connection point for bridging		□ Resistance connection		• Circuit connection point
	LED light connection		⏏ Grounding connection		⏏ Diode connection

Push-in connection technology


Feed-through, multi-conductor and ground terminal blocks

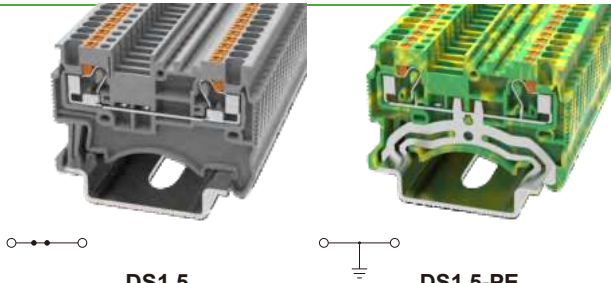

DS1.5


DS1.5-PE

Order NO.		11040000010				11040000018			
Width/Length/Height(NS35/7.5&NS35/15) mm		3.5/45/32.1(39.6)				3.5/45/32.1(39.6)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	500		300		/		/	
Rated current	A	17.5		15		/		/	
Rated cross section	mm²/AWG	0.14-1.5		26-14		0.14-1.5		26-14	
Connection capacity		Solid Stranded Ferrule (with and without plastic sleeve)				Solid Stranded Ferrule (with and without plastic sleeve)			
1 conductor	mm²	0.14-1.5	0.14-1.5	0.15-1.5	0.14-0.5	0.14-1.5	0.14-1.5	0.15-1.5	0.14-0.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	—	—	—	—	—
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)				-40(-40)~105(221)			
Stripping length		mm				8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									

Ferrule		/	/
Slotted screwdriver size (Blade thickness x Width)	mm	0.4x2.5	0.4x2.5
Bridge (2-10P, 20P)		DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5	/
End cover		D-DS1.5	D-DS1.5
Partition plate		/	/
Top marker		ZB3.5 / ZS3.5	ZB3.5 / ZS3.5
Side marker		ZSF3.5	ZSF3.5
Marker support		DTH3.5-25x3.5 / DTH3.5-25x12	DTH3.5-25x3.5 / DTH3.5-25x12
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp		E-PC 1100A / E-WS N	E-PC 1100A / E-WS N

Push-in connection technology

Feed-through, multi-conductor and ground terminal blocks

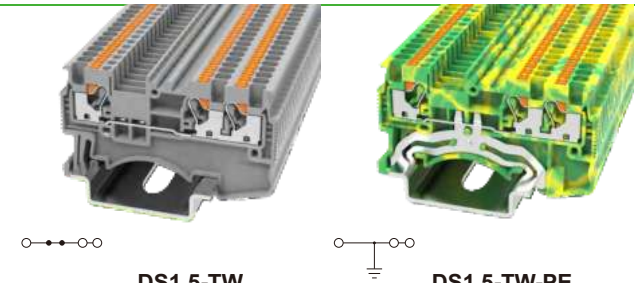

DS1.5-TW

DS1.5-TW-PE

Order NO.		11040000077				11040000097			
Width/Length/Height(NS35/7.5&NS35/15) mm		3.5/54/32.1(39.6)				3.5/54/32.1(39.6)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	500		300		/		/	
Rated current	A	17.5		15		/		/	
Rated cross section	mm ² /AWG	0.14-1.5		26-14		0.14-1.5		26-14	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.14-1.5	0.14-1.5	0.14-1.5	0.14-0.5	0.14-1.5	0.14-1.5	0.14-1.5	0.14-0.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	—	—	—	—	—
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length		8-10				8-10			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									

Ferrule		/	/
Slotted screwdriver size (Blade thickness x Width)	mm	0.4x2.5	0.4x2.5
Bridge (2-10P, 20P)		DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5	/
End cover		D-DS1.5-TW	D-DS1.5-TW
Partition plate		/	/
Top marker		ZB3.5 / ZS3.5	ZB3.5 / ZS3.5
Side marker		ZSF3.5	ZSF3.5
Marker support		DTH3.5-25x3.5 / DTH3.5-25x12	DTH3.5-25x3.5 / DTH3.5-25x12
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp		E-PC 1100A / E-WS N	E-PC 1100A / E-WS N

Push-in connection technology

Feed-through, multi-conductor and ground terminal blocks



DS1.5-QU



DS1.5-QU-PE

CE ENE RoHS REACH

CE ENE RoHS REACH

Order NO.		11040000075				11040000076			
Width/Length/Height(NS35/7.5&NS35/15) mm		3.5/63.2/32.1(39.6)				3.5/63.2/32.1(39.6)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Accessories								
Ferrule		/		/				
Slotted screwdriver size (Blade thickness x Width) mm		0.4x2.5		0.4x2.5				
Bridge (2-10P, 20P)		DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5		/				
End cover		D-DS1.5-QU		D-DS1.5-QU				
Partition plate		/		/				
Top marker		ZB3.5 / ZS3.5		ZB3.5 / ZS3.5				
Side marker		ZSF3.5		ZSF3.5				
Marker support		DTH3.5-25x3.5 / DTH3.5-25x12		DTH3.5-25x3.5 / DTH3.5-25x12				
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8		DLM2 / KLM3-20x8 / KLM3-44x8				
End clamp		E-PC 1100A / E-WS N		E-PC 1100A / E-WS N				

Push-in connection technology

Feed-through, multi-conductor and ground terminal blocks



DSKK1.5



DSKK1.5-PV

CE ENE RoHS REACH

CE ENE RoHS REACH

Order NO.		11040000196				11040000197			
Width/Length/Height(NS35/7.5&NS35/15) mm		3.5/68.2/44.1(51.6)				3.5/68.2/44.1(51.6)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Accessories								
Ferrule		/		/				
Slotted screwdriver size (Blade thickness x Width) mm		0.4x2.5		0.4x2.5				
Bridge (2-10P, 20P)		DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5		DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5				
End cover		D-DSKK1.5		D-DSKK1.5				
Partition plate		/		/				
Top marker		/		/				
Side marker		/		/				
Marker support		/		/				
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8		DLM2 / KLM3-20x8 / KLM3-44x8				
End clamp		E-PC 1100A / E-WS N		E-PC 1100A / E-WS N				

Push-in connection technology

Feed-through, multi-conductor and ground terminal blocks





DSKK1.5-PE

CE ENEC RoHS REACH

Order NO.		11040000195			
Width/Length/Height(NS35/7.5&NS35/15) mm		3.5/68.2/44.1(51.6)			
Electrical Data		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	/		/	
Rated current	A	/		/	
Rated cross section	mm ² /AWG	0.14-1.5		26-16	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.14-1.5	0.14-1.5	0.15-1.5	0.14-0.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	—
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)			
Stripping length mm		8-10			
Color		Yellow green mixed color			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width) mm		0.4x2.5			
Bridge (2-10P, 20P) 		DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5			
End cover 		D-DSKK1.5			
Partition plate		/			
Top marker		/			
Side marker		/			
Marker support		/			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor and ground terminal blocks



DS1.5-3L



DS1.5-3L-PV

CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11040000208				11040000210			
Width/Length/Height(NS35/7.5&NS35/15) mm		3.5/102/56.1(63.6)				3.5/102/56.1(63.6)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	500		300		500		300	
Rated current	A	15		15		15		15	
Rated cross section	mm²/AWG	0.14-1.5		26-16		0.14-1.5		26-16	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.14-1.5	0.14-1.5	0.15-1.5	0.14-0.5	0.14-1.5	0.14-1.5	0.15-1.5	0.14-0.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	—	—	—	—	—
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)				-40(-40)~105(221)			
Stripping length		mm				8-10			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)		mm				0.4x2.5			
Bridge (2-10P, 20P)						DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5			
End cover						D-DS1.5-3L			
Partition plate		/				/			
Top marker		/				/			
Side marker		/				/			
Marker support		/				/			
Terminal strip marker support						DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp						E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor and ground terminal blocks



DS1.5-3L-PE


CE ENEC RoHS REACH

Order NO.	11040000209			
Width/Length/Height(NS35/7.5&NS35/15) mm	3.5/102/56.1(63.6)			
Electrical Data	IEC IEC60947-7-2	UL UL1059		
Rated voltage V	/	/		
Rated current A	/	/		
Rated cross section mm ² /AWG	0.14-1.5	26-16		
Connection capacity	Solid	Stranded	Femle (with and without plastic sleeve)	
1 conductor mm ²	0.14-1.5	0.14-1.5	0.15-1.5	0.14-0.5
2 flexible conductors with a TWIN ferrule mm ²	—	—	—	—
General Information				
Insulation material/Flammability rating (according to UL 94)	PA/V0			
Operation temperatures °C (°F)	-40(-40)~105(221)			
Stripping length mm	8-10			
Color	Yellow green mixed color			

Accessories				
Ferrule	/			
Slotted screwdriver size (Blade thickness x Width) mm	0.4x2.5			
Bridge (2-10P, 20P)	 DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5			
End cover	 D-DS1.5-3L			
Partition plate	/			
Top marker	/			
Side marker	/			
Marker support	/			
Terminal strip marker support	 DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	 E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor and ground terminal blocks

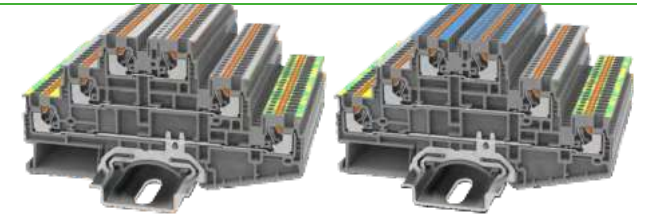

DS1.5-3L-L/L/PE

CE ENEC RoHS REACH




DS1.5-3L-L/N/PE


CE ENEC RoHS REACH

Order NO.	11040000220				11040000221			
Width/Length/Height(NS35/7.5&NS35/15) mm	3.5/102/56.1(63.6)				3.5/102/56.1(63.6)			
Electrical Data	IEC IEC60947-7-1	UL UL1059			IEC IEC60947-7-1	UL UL1059		
Rated voltage V	500	300			500	300		
Rated current A	15	15			15	15		
Rated cross section mm ² /AWG	0.14-1.5	26-16			0.14-1.5	26-16		
Connection capacity	Solid	Stranded	Femle (with and without plastic sleeve)		Solid	Stranded	Femle (with and without plastic sleeve)	
1 conductor mm ²	0.14-1.5	0.14-1.5	0.15-1.5	0.14-0.5	0.14-1.5	0.14-1.5	0.15-1.5	0.14-0.5
2 flexible conductors with a TWIN ferrule mm ²	—	—	—	—	—	—	—	—
General Information								
Insulation material/Flammability rating (according to UL 94)	PA/V0				PA/V0			
Operation temperatures °C (°F)	-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm	8-10				8-10			
Color	Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			


Accessories								
Ferrule	/				/			
Slotted screwdriver size (Blade thickness x Width) mm	0.4x2.5				0.4x2.5			
Bridge (2-10P, 20P)	 DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5				 DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5			
End cover	 D-DS1.5-3L				 D-DS1.5-3L			
Partition plate	/				/			
Top marker	/				/			
Side marker	/				/			
Marker support	/				/			
Terminal strip marker support	 DLM2 / KLM3-20x8 / KLM3-44x8				 DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	 E-PC 1100A / E-WS N				 E-PC 1100A / E-WS N			

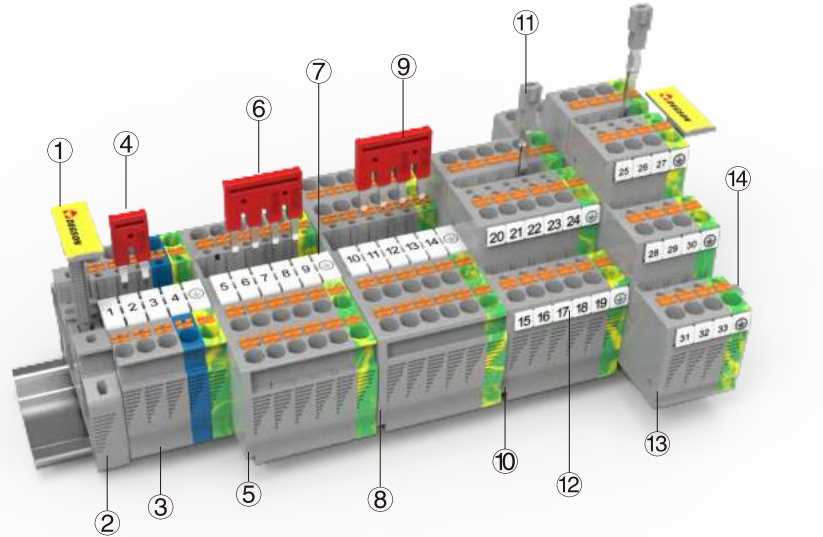

Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	DS2.5-01P-11-00A(H)	Push-in type 2.5mm ² DIN Rail terminal blocks
④ Pluggable bridges	DFB2-5.2-16-00A(H)	02P bridge, use for DS2.5 series
⑤ End cover	D-DS2.5-TW-01P-11-00A(H)	End cover is used for DS2.5-TW&DS2.5-TW-PE
⑥ Pluggable bridges	DFB4-5.2-16-00A(H)	04P bridge, use for DS2.5 series
⑦ Marker	ZB5-10P-19-00A(H)	Marker is used for the top of DS2.5 series
⑧ End cover	D-DS2.5-QU-01P-11-00A(H)	End cover is used for DS2.5-QU&DS2.5-QU-PE
⑨ Pluggable bridges	DFB4-5.2-16-00A(H)	04P bridge, use for DS2.5 series
⑩ End cover	D-DSK2.5-01P-11-00A(H)	End cover is used for DSK2.5&DSK2.5-PE
⑪ Potential bridge	DPV2.5-01P-11-00A(H)	Vertical potential bridge, to connect the upper and lower level
⑫ Marker	ZK5-24P-19-00A(H)	Marker is used for the side of DS2.5 series
⑬ End cover	D-DS2.5-3L-01P-11-00A(H)	End cover is used for DS2.5-3L/DS2.5-3L-PE
⑭ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

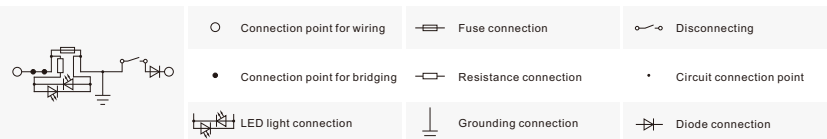Circuit diagram

Push-in connection technology

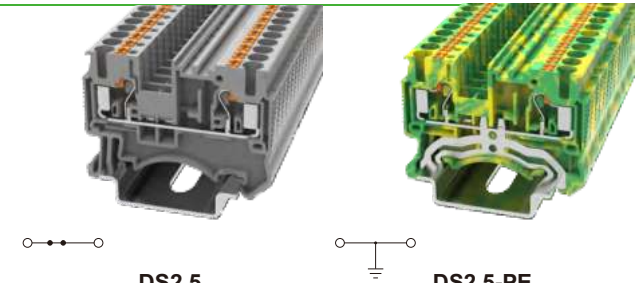Feed-through, multi-conductor, multi-level, and ground terminal blocks


DS2.5
DS2.5-PE

Order NO.		11040000019				11040000031			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/48.6/36.75(44.25)				5.2/48.6/36.75(44.25)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	800		600		/		/	
Rated current	A	24		20		/		/	
Rated cross section	mm²/AWG	0.14-4		26-12		0.14-4		26-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5	—	—	—	0.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)		-40(-40)~105(221)		-40(-40)~105(221)			
Stripping length		mm		10-12		10-12			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)		mm		0.6x3.5		0.6x3.5			
Bridge (2-10P, 20P)		DFB2-5.2 DFB3-5.2 DFB4-5.2 DFB5-5.2 DFB6-5.2 DFB7-5.2 DFB8-5.2 DFB9-5.2 DFB10-5.2 DFB20-5.2				/			
End cover		D-DS2.5				D-DS2.5			
Partition plate		/				/			
Top marker		ZB5 / ZS5				ZB5 / ZS5			
Side marker		ZK5 / ZSF5				ZK5 / ZSF5			
Marker support		DTH5-25x5 / DTH5-25x12				DTH5-25x5 / DTH5-25x12			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks



DS2.5-TW



DS2.5-TW-PE

UL CE ENE RoHS REACH

UL CE ENE RoHS REACH


Order NO.	11040000035				11040000040				
Width/Length/Height(NS35/7.5&NS35/15) mm	5.2/60.5/36.75(44.25)				5.2/60.5/36.75(44.25)				
Electrical Data	IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059		
	Rated voltage	V	800	600	/	/			
Rated current	A	24	20	/	/				
Rated cross section	mm²/AWG	0.14-4	26-12	0.14-4	26-12				
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	Solid	Stranded	Ferrule (with and without plastic sleeve)		
1 conductor	mm²	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5	—	—	—	0.5
General Information									
Insulation material/Flammability rating (according to UL 94)	PA/V0				PA/V0				
Operation temperatures	℃ (°F)	-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length	mm	10-12				10-12			
Color	Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color				

Accessories

Ferrule	/				/			
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5				0.6x3.5			
Bridge (2-10P, 20P)	DFB2-5.2 DFB3-5.2 DFB4-5.2 DFB5-5.2 DFB6-5.2 DFB7-5.2 DFB8-5.2 DFB9-5.2 DFB10-5.2 DFB20-5.2				/			
End cover	D-DS2.5-TW				D-DS2.5-TW			
Partition plate	/				/			
Top marker	ZB5 / ZS5				ZB5 / ZS5			
Side marker	ZK5 / ZSF5				ZK5 / ZSF5			
Marker support	DTH5-25x5 / DTH5-25x12				DTH5-25x5 / DTH5-25x12			
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks



DS2.5-QU



DS2.5-QU-PE

UL CE ENE RoHS REACH

UL CE ENE RoHS REACH

Order NO.		11040000032				11040000034			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/72.2/36.75(44.25)				5.2/72.2/36.75(44.25)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Accessories

Ferrule	/				/			
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5				0.6x3.5			
Bridge (2-10P, 20P)	DFB2-5.2 DFB3-5.2 DFB4-5.2 DFB5-5.2 DFB6-5.2 DFB7-5.2 DFB8-5.2 DFB9-5.2 DFB10-5.2 DFB20-5.2				/			
End cover	D-DS2.5-QU				D-DS2.5-QU			
Partition plate	/				/			
Top marker	ZB5 / ZS5				ZB5 / ZS5			
Side marker	ZK5 / ZSF5				ZK5 / ZSF5			
Marker support	DTH5-25x5 / DTH5-25x12				DTH5-25x5 / DTH5-25x12			
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks



DSKK 2.5



DSKK 2.5-PV

Order NO.		11040000062				11040000063			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/68.2/48.75(56.25)				5.2/68.2/48.75(56.25)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	500		300		500		300	
Rated current	A	22		20		22		20	
Rated cross section	mm ² /AWG	0.14-4		26-12		0.14-4		26-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5	—	—	—	0.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)				-40(-40)~105(221)			
Stripping length		mm				10-12			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Accessories									

Ferrule	/				/			
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5				0.6x3.5			
Bridge (2-10P, 20P)	DFB2-5.2 DFB3-5.2 DFB4-5.2 DFB5-5.2 DFB6-5.2 DFB7-5.2 DFB8-5.2 DFB9-5.2 DFB10-5.2 DFB20-5.2				DFB2-5.2 DFB3-5.2 DFB4-5.2 DFB5-5.2 DFB6-5.2 DFB7-5.2 DFB8-5.2 DFB9-5.2 DFB10-5.2 DFB20-5.2			
End cover	D-DSKK2.5				D-DSKK2.5			
Partition plate	/				/			
Top marker	/				/			
Side marker	ZK5 / ZSF5				ZK5 / ZSF5			
Marker support	DMTH5-2 / DMTH5-3				DMTH5-2 / DMTH5-3			
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks




DSKK 2.5-PE

Order NO.	11040000099			
Width/Length/Height(NS35/7.5&NS35/15) mm	5.2/68.2/48.75(56.25)			
Electrical Data	IEC IEC60947-7-2		UL UL1059	
Rated voltage				

Ferrule	/			
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5			
Bridge (2-10P, 20P)	DFB2-5.2 DFB3-5.2 DFB4-5.2 DFB5-5.2 DFB6-5.2 DFB7-5.2 DFB8-5.2 DFB9-5.2 DFB10-5.2 DFB20-5.2			
End cover	D-DSKK2.5			
Partition plate	/			
Top marker	/			
Side marker	ZK5 / ZSF5			
Marker support	DMTH5-2 / DMTH5-3			
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks

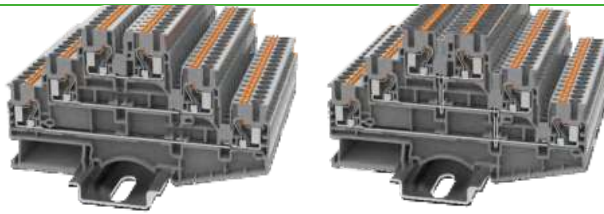

DS2.5-3L



DS2.5-3L-PV

CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11040000125				11040000128			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/102.00/60.75(68.25)				5.2/102.00/60.75(68.25)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks




DS2.5-3L-PE

CE ENEC RoHS REACH

Order NO.	11040000129				
Width/Length/Height(NS35/7.5&NS35/15)	mm	5.2/102.00/60.75(68.25)			
Electrical Data		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	/		/	
Rated current	A	/		/	
Rated cross section	mm²/AWG	0.14-4		26-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		°C (°F) -40(-40)~105(221)			
Stripping length		mm 10-12			
Color		Yellow green mixed color			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm 0.6x3.5			
Bridge (2-10P, 20P)		 DFB2-5.2 DFB3-5.2 DFB4-5.2 DFB5-5.2 DFB6-5.2 DFB7-5.2 DFB8-5.2 DFB9-5.2 DFB10-5.2 DFB20-5.2			
End cover		 D-DS2.5-3L			
Partition plate		/			
Top marker		/			
Side marker		 ZK5 / ZSF5			
Marker support		 DMTH5-2 / DMTH5-3			
Terminal strip marker support		 DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		 E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks

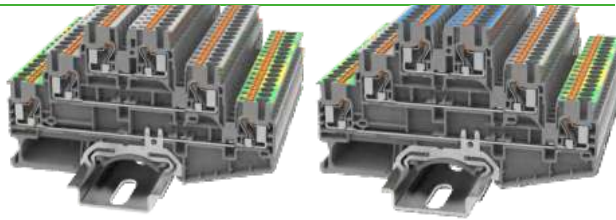

DS2.5-3L-L/L/PE

CE ENEC RoHS REACH



DS2.5-3L-L/N/PE


CE ENEC RoHS REACH

Order NO.		11040000142				11040000293			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/102.00/60.75(68.25)				5.2/102.00/60.75(68.25)			
Electrical Data		IEC		UL		IEC		UL	
		IEC60947-7-1 IEC60947-7-2		UL1059		IEC60947-7-1 IEC60947-7-2		UL1059	
Rated voltage									

Accessories								
Ferrule	/				/			
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5				0.6x3.5			
Bridge (2-10P, 20P)	DFB2-5.2 DFB3-5.2 DFB4-5.2 DFB5-5.2 DFB6-5.2 DFB7-5.2 DFB8-5.2 DFB9-5.2 DFB10-5.2 DFB20-5.2				DFB2-5.2 DFB3-5.2 DFB4-5.2 DFB5-5.2 DFB6-5.2 DFB7-5.2 DFB8-5.2 DFB9-5.2 DFB10-5.2 DFB20-5.2			
End cover	D-DS2.5-3L				D-DS2.5-3L			
Partition plate	/				/			
Top marker	/				/			
Side marker	ZK5 / ZSF5				ZK5 / ZSF5			
Marker support	DMTH5-2 / DMTH5-3				DMTH5-2 / DMTH5-3			
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks




DS2.5-PE/3L


CE ENEC RoHS REACH

Order NO.		11040000188			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/99.4/92.6(100.1)			
Electrical Data		IEC IEC60947-7-1 IEC60947-7-2		UL UL1059	
Rated voltage	V	800		600	
Rated current	A	20		20	
Rated cross section	mm² /AWG	0.14-4		26-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		℃ (°F)		-40(-40)~105(221)	
Stripping length		mm		10-12	
Color		Grey, Red, Blue (please contact sales for other color requirements)			


Accessories				
Ferrule	/			
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5			
Bridge (2P, 3P, 10P)	DFBS2-5.2 / DFBS3-5.2 / DFBS10-5.2			
End cover	D-DS2.5-PE/3L			
Partition plate	/			
Top marker	ZB5 / ZS5			
Side marker	ZK5 / ZSF5			
Marker support	DMTH5-2 / DMTH5-3			
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	E-PC 1100A / E-WS N			

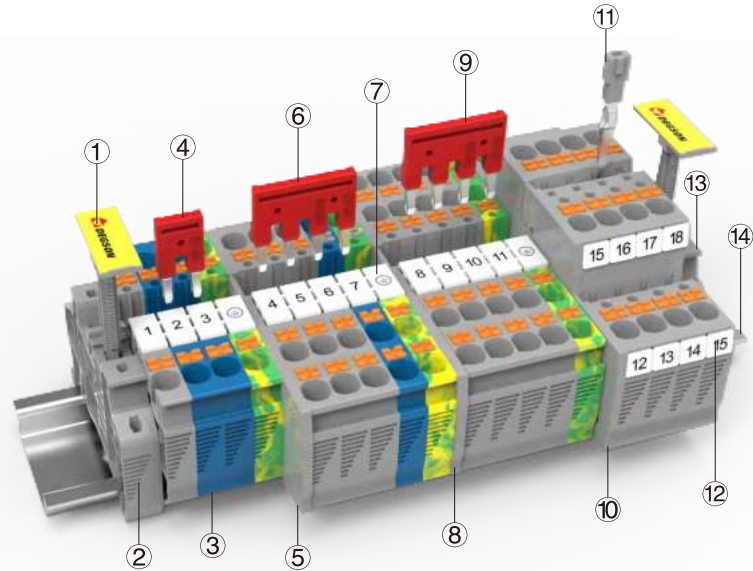

Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	DS4-01P-11-00A(H)	Push-in type 4mm ² DIN Rail terminal blocks
④ Pluggable bridges	DFB2-6.2-16-00A(H)	02P bridge, use for DS4 series
⑤ End cover	D-DS4-TW-01P-11-00A(H)	End cover is used for DS4-TW&DS4-TW-PE
⑥ Pluggable bridges	DFB4-6.2-16-00A(H)	04P bridge, use for DS4 series
⑦ Marker	ZB6-10P-19-00A(H)	Marker is used for the top of DS4 series
⑧ End cover	D-DS4-QU-01P-11-00A(H)	End cover is used for DS4-QU&DS4-QU-PE
⑨ Pluggable bridges	DFB4-6.2-16-00A(H)	04P bridge, use for DS4 series
⑩ End cover	D-DSK4-01P-11-00A(H)	End cover is used for DSK4&DSK4-PE
⑪ Potential bridge	DPV2.5-01P-11-00A(H)	Vertical potential bridge, to connect the upper and lower level
⑫ Marker	ZK6-20P-19-00A(H)	Marker is used for the side of DS4 series
⑬ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑭ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

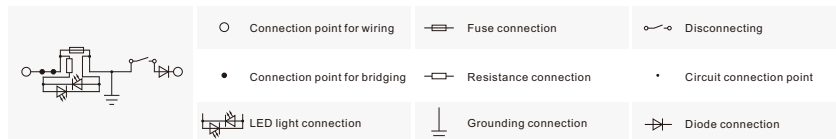Circuit diagram

Push-in connection technology

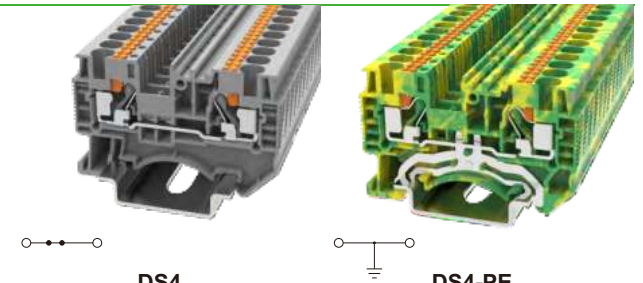Feed-through, multi-conductor, multi-level, and ground terminal blocks


DS4
DS4-PE

Order NO.	11040000041	11040000047
Width/Length/Height(NS35/7.5&NS35/15) mm	6.2/55.6/36.8(44.3)	6.2/55.6/36.8(44.3)
Electrical Data	IEC IEC60947-7-1	UL UL1059
Rated voltage V	800	600
Rated current A	32	30
Rated cross section mm ² /AWG	0.2-6	24-10
Connection capacity	Solid Stranded Ferrule (with and without plastic sleeve)	Solid Stranded Ferrule (with and without plastic sleeve)
1 conductor mm ²	0.2-6 0.2-4 0.2-4 0.2-4	0.2-6 0.2-4 0.2-4 0.2-4
2 flexible conductors with a TWIN ferrule mm ²	— — — 0.5-1	— — — 0.5-1
General Information		
Insulation material/Flammability rating (according to UL 94)	PA/V0	PA/V0
Operation temperatures °C (°F)	-40(-40)~105(221)	-40(-40)~105(221)
Stripping length mm	11-13	11-13
Color	Grey, Red, Blue (please contact sales for other color requirements)	Yellow green mixed color
Accessories		
Ferrule	/	/
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5	0.6x3.5
Bridge (2-10P)	DFB2-6.2 DFB3-6.2 DFB4-6.2 DFB5-6.2 DFB6-6.2 DFB7-6.2 DFB8-6.2 DFB9-6.2 DFB10-6.2	/
End cover	D-DS4	D-DS4
Partition plate	/	/
Top marker	ZB6 / ZS6	ZB6 / ZS6
Side marker	ZK6 / ZSF6	ZK6 / ZSF6
Marker support	/	/
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp	E-PC 1100A / E-WS N	E-PC 1100A / E-WS N

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks



DS4-TW

DS4-TW-PE

UL US CE ENE RoHS REACH

UL US CE ENE RoHS REACH

Order NO.		11040000050				11040000051			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.2/66.5/36.8(44.3)				6.2/66.5/36.8(44.3)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Accessories

Ferrule	/				/			
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5				0.6x3.5			
Bridge (2-10P)	DFB2-6.2 DFB3-6.2 DFB4-6.2 DFB5-6.2 DFB6-6.2 DFB7-6.2 DFB8-6.2 DFB9-6.2 DFB10-6.2				/			
End cover	D-DS4-TW				D-DS4-TW			
Partition plate	/				/			
Top marker	ZB6 / ZS6				ZB6 / ZS6			
Side marker	ZK6 / ZSF6				ZK6 / ZSF6			
Marker support	/				/			
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks



DS4-QU

DS4-QU-PE

UL US CE ENE RoHS REACH

UL US CE ENE RoHS REACH


Order NO.		11040000048				11040000049			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.2/77/36.8(44.3)				6.2/77/36.8(44.3)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Accessories

Ferrule	/				/			
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5				0.6x3.5			
Bridge (2-10P)	DFB2-6.2 DFB3-6.2 DFB4-6.2 DFB5-6.2 DFB6-6.2 DFB7-6.2 DFB8-6.2 DFB9-6.2 DFB10-6.2				/			
End cover	D-DS4-QU				D-DS4-QU			
Partition plate	/				/			
Top marker	ZB6 / ZS6				ZB6 / ZS6			
Side marker	ZK6 / ZSF6				ZK6 / ZSF6			
Marker support	/				/			
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks

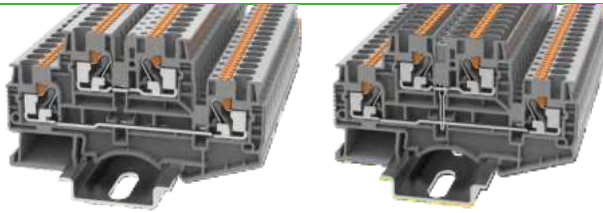

DSKK4



DSKK4-PV

UL US CE ENE RoHS REACH

UL US CE ENE RoHS REACH

Order NO.		11040000064				11040000065			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.2/83.5/48.75(56.25)				6.2/83.5/48.75(56.25)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Ferrule		/				/					
Slotted screwdriver size (Blade thickness x Width)	mm	0.6x3.5				0.6x3.5					
Bridge (2-10P)		DFB2-6.2	DFB3-6.2	DFB4-6.2	DFB5-6.2	DFB6-6.2	DFB2-6.2	DFB3-6.2	DFB4-6.2	DFB5-6.2	DFB6-6.2
		DFB7-6.2	DFB8-6.2	DFB9-6.2	DFB10-6.2		DFB7-6.2	DFB8-6.2	DFB9-6.2	DFB10-6.2	
End cover		D-DSKK4				D-DSKK4					
Partition plate		/				/					
Top marker		/				/					
Side marker		ZK6				ZK6					
Marker support		/				/					
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8					
End clamp		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N					

Push-in connection technology

Feed-through, multi-conductor, multi-level, and ground terminal blocks




DSKK4-PE

CE ENE RoHS REACH

Order NO.	11040000144			
Width/Length/Height(NS35/7.5&NS35/15) mm	6.2/83.5/48.75(56.25)			
Electrical Data	IEC IEC60947-7-2		UL UL1059	
Rated voltage				

Ferrule		/				
Slotted screwdriver size (Blade thickness x Width)	mm	0.6x3.5				
Bridge (2-10P)		DFB2-6.2	DFB3-6.2	DFB4-6.2	DFB5-6.2	DFB6-6.2
		DFB7-6.2	DFB8-6.2	DFB9-6.2	DFB10-6.2	
End cover		D-DSKK4				
Partition plate		/				
Top marker		/				
Side marker		ZK6				
Marker support		/				
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8				
End clamp		E-PC 1100A / E-WS N				

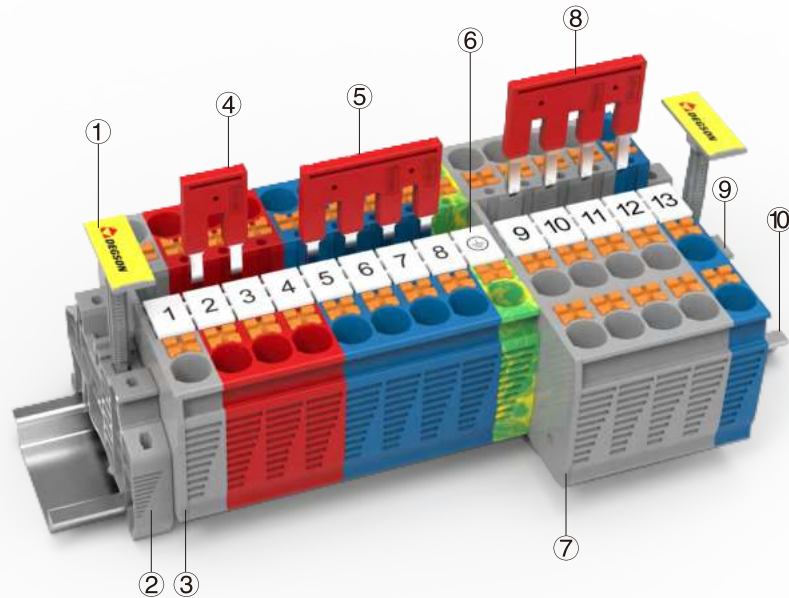


Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ End cover	D-DS6-01P-11-00A(H)	End cover is used for DS6&DS6-PE
④ Pluggable bridges	DFB2-8.2-16-00A(H)	02P bridge, use for DS6 series
⑤ Pluggable bridges	DFB4-8.2-16-00A(H)	04P bridge, use for DS6 series
⑥ Marker	ZB8-10P-19-00A(H)	Marker is used for the top of DS6 series
⑦ End cover	D-DS6-TW-01P-11-00A(H)	End cover is used for DS6-TW&DS6-TW-PE
⑧ Pluggable bridges	DFB4-8.2-16-00A(H)	04P bridge, use for DS6 series
⑨ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑩ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		Fuse connection		Disconnecting
	● Connection point for bridging		Resistance connection		Circuit connection point
	LED light connection		Grounding connection		Diode connection

Push-in connection technology


Feed-through, multi-conductor and ground terminal blocks

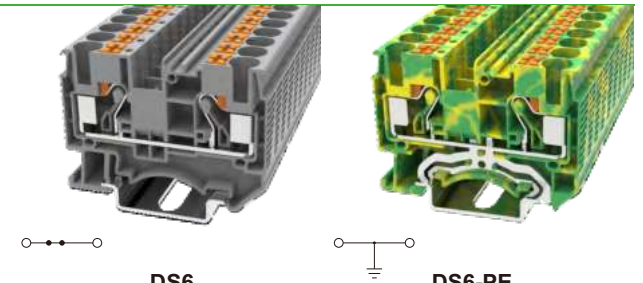
DS6
DS6-PE

Order NO.		11040000052				11040000060			
Width/Length/Height(NS35/7.5&NS35/15) mm		8.2/58/43.5(51)				8.2/58/43.5(51)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	1000		600		/		/	
Rated current	A	41		50		/		/	
Rated cross section	mm²/AWG	0.5-10		20-8		0.5-10		20-8	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.5-10	0.5-10	0.5-6	0.5-6	0.5-10	0.5-10	0.5-6	0.5-6
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-2.5	—	—	—	0.5-2.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		10-12				10-12			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		0.8x4				0.8x4			
Bridge (2-10P)		DFB2-8.2	DFB3-8.2	DFB4-8.2	DFB5-8.2	DFB6-8.2	/		
		DFB7-8.2	DFB8-8.2	DFB9-8.2	DFB10-8.2				
End cover		D-DS6				D-DS6			
Partition plate		/				/			
Top marker		ZB8 / ZS8				ZB8 / ZS8			
Side marker		ZSF8				ZSF8			
Marker support		/				/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Push-in connection technology

Feed-through, multi-conductor and ground terminal blocks



DS6-TW

DS6-TW-PE

CE ENE RoHS REACH

CE ENE RoHS REACH

Order NO.		11040000091				11040000147			
Width/Length/Height(NS35/7.5&NS35/15) mm		8.2/74.2/43.5(51)				8.2/74.2/43.5(51)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Push-in connection technology

Feed-through, multi-conductor and ground terminal blocks




DS6-QU

DS6-QU-PE

CE ENE RoHS REACH

CE ENE RoHS REACH

Order NO.		11040000145				11040000146			
Width/Length/Height(NS35/7.5&NS35/15) mm		8.2/90.4/43.5(51)				8.2/90.4/43.5(51)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	1000		600		/		/	
Rated current	A	41		40		/		/	
Rated cross section	mm² /AWG	0.5-10		20-8		0.5-10		20-8	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.5-10	0.5-10	0.5-6	0.5-6	0.5-10	0.5-10	0.5-6	0.5-6
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-2.5	—	—	—	0.5-2.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		12				12			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		0.8x4				0.8x4			
Bridge (2-10P)		DFB2-8.2	DFB3-8.2	DFB4-8.2	DFB5-8.2	DFB6-8.2	/		
		DFB7-8.2	DFB8-8.2	DFB9-8.2	DFB10-8.2				
End cover		D-DS6-QU				D-DS6-QU			
Partition plate		/				/			
Top marker	 	ZB8 / ZS8				ZB8 / ZS8			
Side marker		ZSF8				ZSF8			
Marker support		/				/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

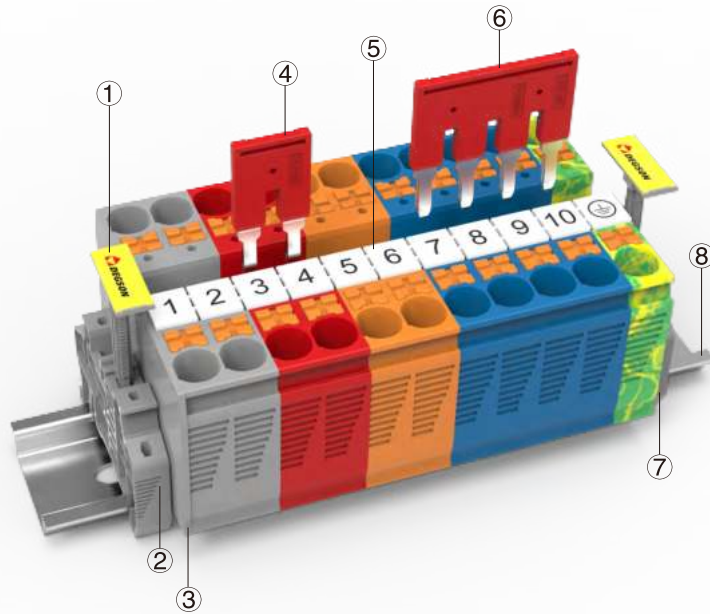

Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ End cover	D-DS10-01P-11-00A(H)	End cover is used for DS10&DS10-PE
④ Pluggable bridges	DFB2-10.2-16-00A(H)	02P bridge, use for DS10 series
⑤ Marker	ZB10-10P-19-00A(H)	Marker is used for the top of DS10 series
⑥ Pluggable bridges	DFB4-10.2-16-00A(H)	04P bridge, use for DS10 series
⑦ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑧ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		Fuse connection		Disconnecting
	• Connection point for bridging		Resistance connection	• Circuit connection point	
	LED light connection		Grounding connection		Diode connection

Push-in connection technology


Feed-through, multi-conductor and ground terminal blocks


DS10
DS10-PE

Order NO.	11040000001	11040000009
Width/Length/Height(NS35/7.5&NS35/15) mm	10.2/67.7/51.1(58.6)	10.2/67.7/51.1(58.6)
Electrical Data	IEC IEC60947-7-1	UL UL1059
Rated voltage V	1000	600
Rated current A	57	60
Rated cross section mm ² /AWG	0.5-16	20-6
Connection capacity	Solid Stranded Ferrule (with and without plastic sleeve)	Solid Stranded Ferrule (with and without plastic sleeve)
1 conductor mm ²	0.5-16 0.5-10 0.5-10 0.5-10	0.5-16 0.5-10 0.5-10 0.5-10
2 flexible conductors with a TWIN ferrule mm ²	— — — 1.5-4	— — — 1.5-4
General Information		
Insulation material/Flammability rating (according to UL 94)	PA/V0	PA/V0
Operation temperatures °C (°F)	-40(-40)~105(221)	-40(-40)~105(221)
Stripping length mm	16-18	16-18
Color	Grey, Red, Blue (please contact sales for other color requirements)	Yellow green mixed color
Accessories		
Ferrule	/	/
Slotted screwdriver size (Blade thickness x Width) mm	1x5.5	1x5.5
Bridge (2-10P)	DFB2-10.2 DFB3-10.2 DFB4-10.2 DFB5-10.2 DFB6-10.2 DFB7-10.2 DFB8-10.2 DFB9-10.2 DFB10-10.2	/
End cover	D-DS10	D-DS10
Partition plate	/	/
Top marker	ZB10 / ZS10	ZB10 / ZS10
Side marker	ZSF10	ZSF10
Marker support	/	/
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp	E-PC 1100A / E-WS N	E-PC 1100A / E-WS N

Push-in connection technology

Feed-through, multi-conductor and ground terminal blocks

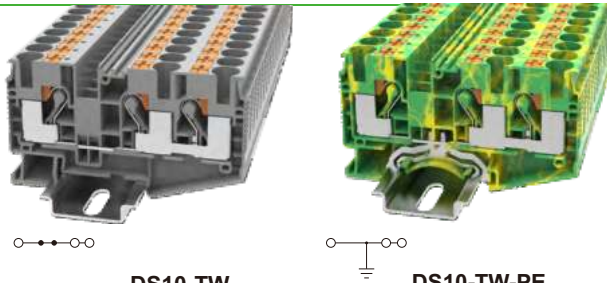


DS10-TW

DS10-TW-PE

CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11040000148				11040000149			
Width/Length/Height(NS35/7.5&NS35/15) mm		10.2/88.9/51.1(58.6)				10.2/88.9/51.1(58.6)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

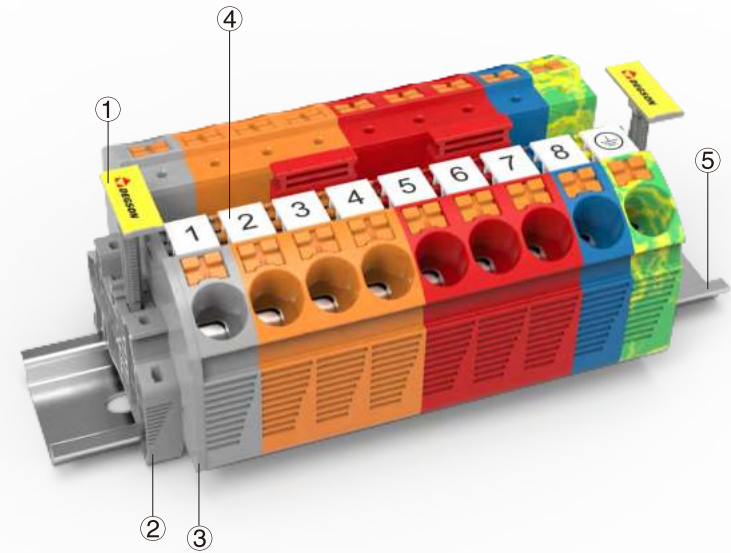


Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ End cover	D-DS16-01P-11-00A(H)	End cover is used for DS16&DS16-PE
④ Marker	ZT12-10P-19-00A(H)	Marker is used for the top of DS16 series
⑤ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		Fuse connection		Disconnecting
	• Connection point for bridging		Resistance connection		Circuit connection point
	LED light connection		Grounding connection		Diode connection

Push-in connection technology

Feed-through and ground terminal blocks

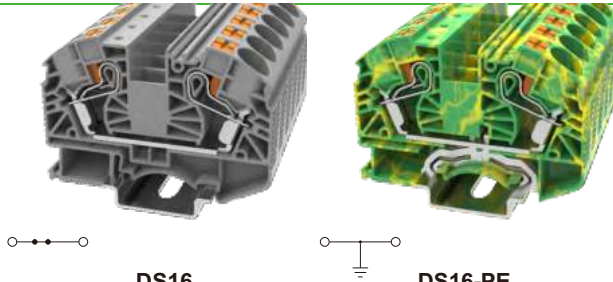


CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11040000069				11040000070			
Width/Length/Height(NS35/7.5&NS35/15) mm		12.2/75.4/53.26(60.76)				12.2/75.4/53.26(60.76)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Push-in connection technology

Feed-through and ground terminal blocks

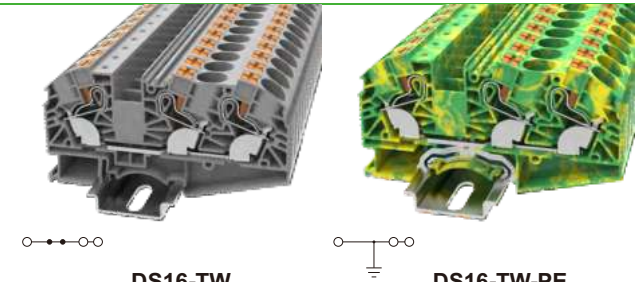


CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11040000193				11040000192			
Width/Length/Height(NS35/7.5&NS35/15) mm		12.2/100.4/53.25 (60.75)				12.2/100.4/53.25 (60.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	1000		600		/		/	
Rated current	A	76		85		/		/	
Rated cross section	mm² /AWG	0.5-25		20-4		0.5-25		20-4	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.5-25	0.5-16	0.5-16	0.5-16	0.5-25	0.5-16	0.5-16	0.5-16
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	1.5-4	—	—	—	1.5-4
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		18				18			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		1x5.5				1x5.5			
Bridge (2P) 		DFB2-12.2				/			
End cover 		D-DS16-TW				D-DS16-TW			
Partition plate		/				/			
Top marker 		ZT12 / ZS12				ZT12 / ZS12			
Side marker 		ZSF12				ZSF12			
Marker support		/				/			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

DS Fuse Terminal Blocks

- DS Fuse terminal blocks can reach tool free wiring with the Push-in connection technology; Easy to remove the cable by push the orange button
- Snap-on fuse box for easy fuse replacement
- Equipped with LED indicator for quick identification of fusing status
- Double-channel bridging design and 2-20 poles bridges reach the flexible distribution of potentials
- Equipped with test hole on the wiring position, easy to test the circuit

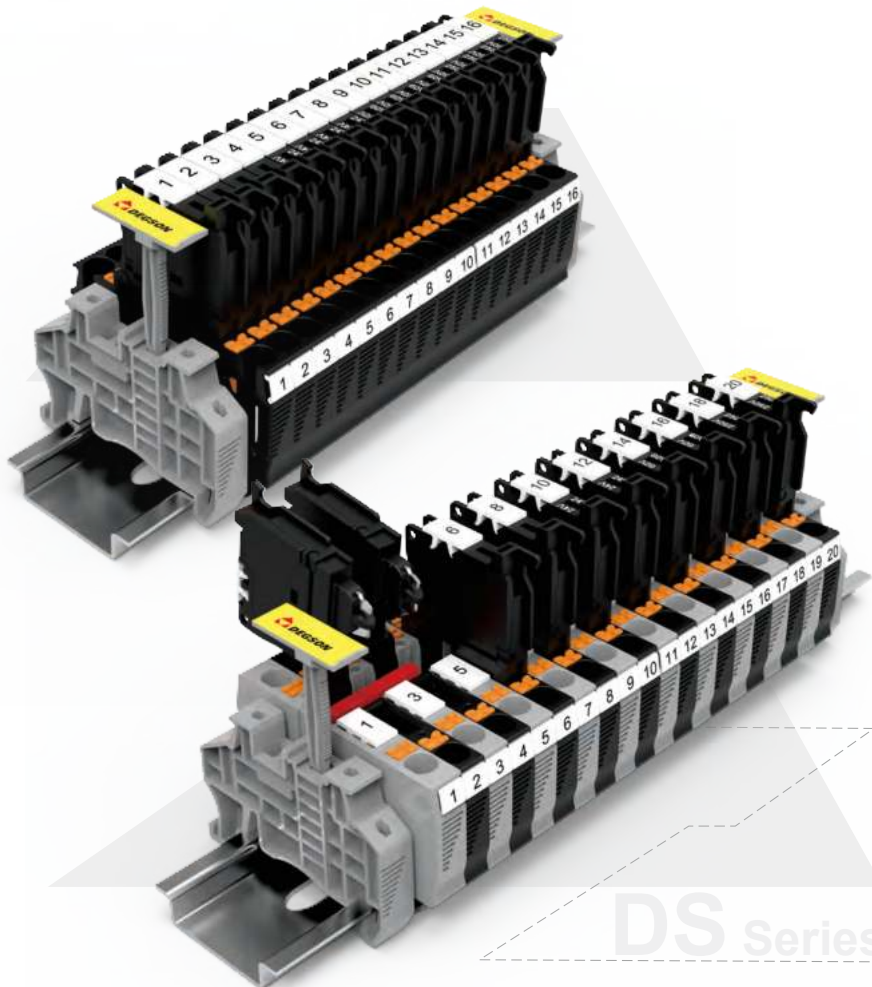

DS Series

Push-in connection technology

Fuse terminal blocks



DS4-HE



DS4-HE-LD24

CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11040000163				11040000162							
Width/Length/Height(NS35/7.5&NS35/15)		mm		6.2/55.6/36.8(44.3)				6.2/55.6/36.8(44.3)					
Electrical Data		IEC IEC60947-7-3		UL UL1059		IEC IEC60947-7-3							
Rated voltage		V		400		300		24 (Led voltage range 12-30V)					
Rated current		A		6.3		6.3		6.3					
Rated cross section		mm²/AWG		0.2-6		24-10		0.2-6		24-10			
Connection capacity				Solid Stranded Ferrule (with and without plastic sleeve)				Solid Stranded Ferrule (with and without plastic sleeve)					
1 conductor		mm²		0.2-6		0.2-4 0.2-4 0.2-4		0.2-6		0.2-4 0.2-4 0.2-4			
2 flexible conductors with a TWIN ferrule		mm²		— — —		0.5-1		— — —		0.5-1			
General Information													
Insulation material/Flammability rating (according to UL 94)				PA/V0				PA/V0					
Operation temperatures				℃ (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length				mm		11-13				11-13			
Color				Black (please contact sales for other color requirements)				Black (please contact sales for other color requirements)					
Accessories													
Ferrule				/				/					
Slotted screwdriver size (Blade thickness x Width)				mm		0.6x3.5				0.6x3.5			
Bridge (2-10P)				DFB2-6.2 DFB3-6.2 DFB4-6.2 DFB5-6.2 DFB6-6.2 DFB7-6.2 DFB8-6.2 DFB9-6.2 DFB10-6.2		DFB2-6.2 DFB3-6.2 DFB4-6.2 DFB5-6.2 DFB6-6.2 DFB7-6.2 DFB8-6.2 DFB9-6.2 DFB10-6.2							
End cover				D-DS4-HE				D-DS4-HE					
Partition plate				/				/					
Top marker				ZB6 / ZS6				ZB6 / ZS6					
Side marker				ZK6 / ZSF6				ZK6 / ZSF6					
Marker support				/				/					
Terminal strip marker support				DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8					
End clamp				E-PC 1100A / E-WS N				E-PC 1100A / E-WS N					

Push-in connection technology

Disconnect terminal blocks



DS2.5-MT

CE ENE RoHS REACH



DS2.5-TG

CE ENE RoHS REACH

Order NO.	11040000201				11040000207													
Width/Length/Height(NS35/7.5&NS35/15)	mm		5.2/62/36.75(44.25)				5.2/62/36.75(44.25)											
Electrical Data			IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059									
	Rated voltage	V	400		300		400		300									
	Rated current	A	20		20		20		20									
	Rated cross section	mm ² /AWG	0.14-4		26-12		0.14-4		26-12									
	Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)									
1 conductor	mm ²	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5									
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5	—	—	—	0.5									
General Information																		
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0												
Operation temperatures		℃ (°F)		-40(-40)~105(221)				-40(-40)~105(221)										
Stripping length		mm		10-12				10-12										
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)												
Accessories																		
Matching accessories				/				DS-DI / DS-CO / DS-FU5 / DS-FU5-LD24										
Slotted screwdriver size (Blade thickness x Width)		mm		0.6x3.5				0.6x3.5										
Bridge (2-10 20P)				DFB2-5.2	DFB3-5.2	DFB4-5.2	DFB5-5.2	DFB6-5.2	DFB2-5.2	DFB3-5.2	DFB4-5.2	DFB5-5.2	DFB6-5.2	DFB7-5.2	DFB8-5.2	DFB9-5.2	DFB10-5.2	DFB20-5.2
End cover				D-DS2.5-MT				D-DS2.5-MT										
Partition plate		/				/												
Top marker				ZB5 / ZS5				ZB5 / ZS5										
Side marker				ZK5 / ZSF5				ZK5 / ZSF5										
Marker support				DTH5-25x5 / DTH5-25x12				/										
Terminal strip marker support				DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8										
End clamp				E-PC 1100A / E-WS N				E-PC 1100A / E-WS N										

Push-in connection technology

Disconnect terminal blocks



DS4-MT

CE ENE RoHS REACH



DS4-TG

CE ENE RoHS REACH

Order NO.		11040000213				11040000212			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.2/55.6/36.75(44.25)				6.2/55.6/36.75(44.25)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Push-in connection technology

Disconnect terminal blocks



DS6-MT



DS6-TG


CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11040000205				11040000204			
Width/Length/Height(NS35/7.5&NS35/15) mm		8.2/74.2/43.5(51)				8.2/74.2/43.5(51)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

DS Plug-in Terminal Blocks

- Plug-in pluggable wiring system, which can be quickly installed and disassembled to realize modularization of circuit connection
- Mis-plug-proof structure design, with DS-PC to prevent mis-connection; with orange snaps, the plug can be fixed on the base; the plug can be flexibly assembled according to requirements
- The wiring position is equipped with a test hole, which is convenient for testing the circuit
- Double-channel bridging design and 2-20 poles bridges reach the flexible distribution of potentials
- Terminal blocks and plugs of the Plug-in system are protected against touch

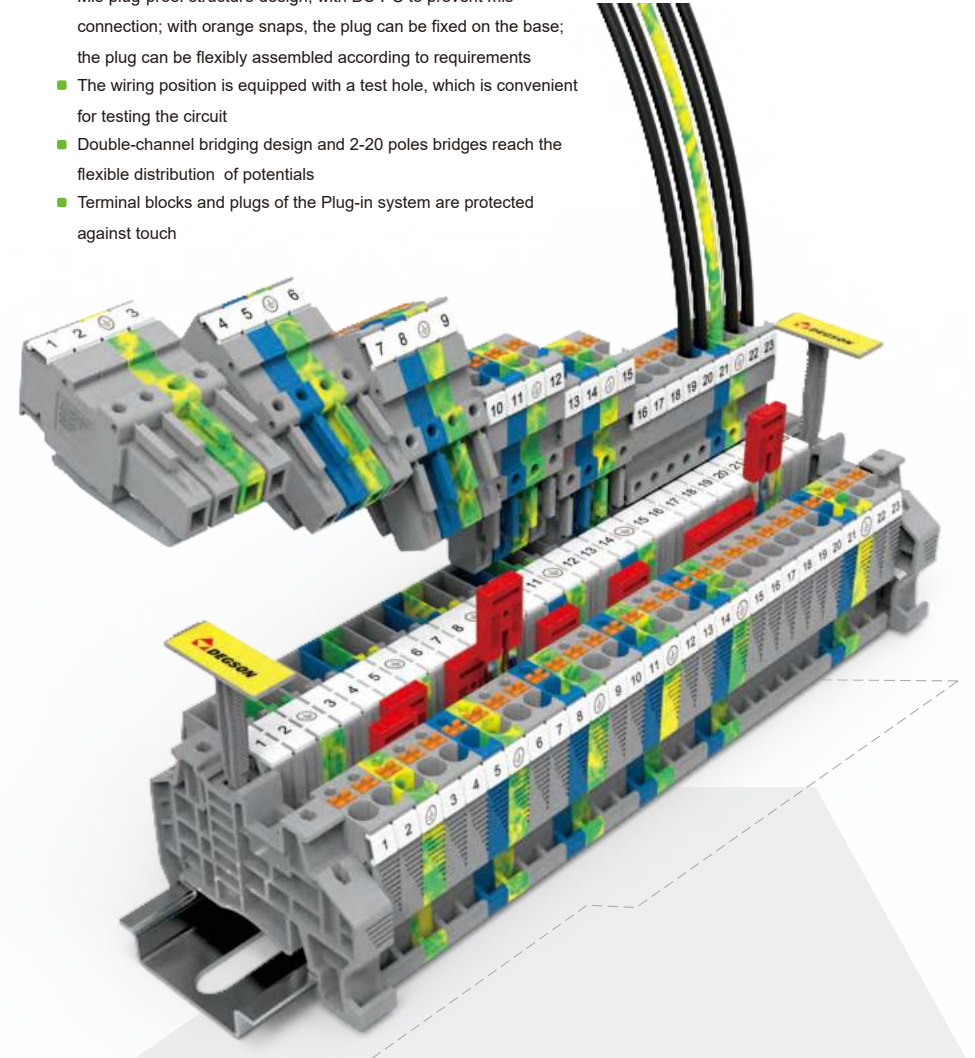

DS Series

Push-in connection technology

Plug-in terminal blocks



DS2.5/1P



DS2.5/1P-PE

CE ENE RoHS REACH

CE ENE RoHS REACH

Order NO.		11040000240				11040000241			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/48.6/36.75(44.25)				5.2/48.6/36.75(44.25)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1 / IEC60947-7-2		UL UL1059	
Rated voltage									

Index List

Matching plugs index list of DS Plug-in system				
Type	Quantity	Matching plugs	Type	Quantity
DS2.5/1P	1	DSP2.5-H-01P-11-00A(H)	/	/
DS2.5/1P	2	DSP2.5-H-02P-11-00A(H)	DSP2.5-H-L	1
			DSP2.5-H-M	0
			DSP2.5-H-R	1
DS2.5/1P	3	DSP2.5-H-03P-11-00A(H)	DSP2.5-H-L	1
			DSP2.5-H-M	1
			DSP2.5-H-R	1
DS2.5/1P	4	DSP2.5-H-04P-11-00A(H)	DSP2.5-H-L	1
			DSP2.5-H-M	2
			DSP2.5-H-R	1
...	...	...	...	...
DS2.5/1P	15	DSP2.5-H-15P-11-00A(H)	DSP2.5-H-L	1
			DSP2.5-H-M	13
			DSP2.5-H-R	1



DSP2.5-H-L

DSP2.5-H-M

DSP2.5-H-R

Self assembled plug

Optional combination plug (2p-15p) or single-chip plug (left, middle and right)




DSR1.5 assembly effect drawing

DSR2.5 assembly effect drawing

The self-assembled plug can be matched with DSR1.5/2.5 clip accessories, flexible field installation

DS Sensor Terminal Blocks And Actuator Terminal Blocks

- DSIO Initiator/actuator terminal blocks can reach tool free wiring with the Push-in connection technology; Easy to remove the cable by push the orange button
- 3.5mm ultra-thin design, saving space; compact structure reach high wiring density
- The power feed module used with bridge, realize the power distribution of positive and negative
- Compatible with the marking system to clearly identify the working area
- Equipped with test hole on the wiring position, easy to test the circuit

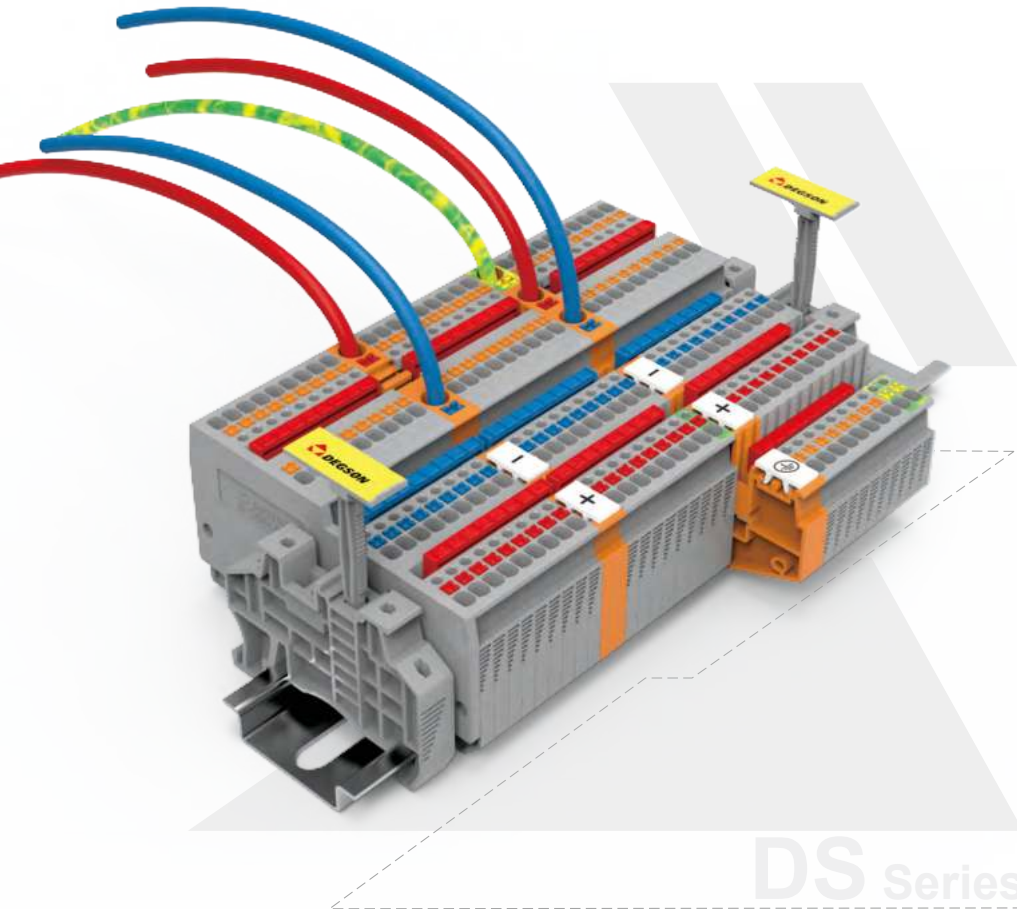

DS Series

Push-in connection technology

Sensor terminal blocks and actuator terminal blocks



DSIO1.5/3



DSIO1.5/3-PE

CE ENE RoHS REACH

CE ENE RoHS REACH

Order NO.		11040000234				11040000235					
Width/Length/Height(NS35/7.5&NS35/15)		mm		3.5/74.4/41.5(49)				3.5/74.4/41.5(49)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1 IEC60947-7-2		UL UL1059			
Rated voltage		V		250		300		250		300	
Rated current		A		13.5		15		13.5		15	
Rated cross section		mm²/AWG		0.14-1.5		26-16		0.14-1.5		26-16	
Connection capacity				Solid Stranded Ferrule (with and without plastic sleeve)				Solid Stranded Ferrule (with and without plastic sleeve)			
1 conductor		mm²		0.14-1.5 0.14-1.5 0.15-1.5 0.14-0.5				0.14-1.5 0.14-1.5 0.15-1.5 0.14-1.5			
2 flexible conductors with a TWIN ferrule		mm²		— — — —				— — — —			
General Information											
Insulation material/Flammability rating (according to UL 94)				PA/V0				PA/V0			
Operation temperatures		°C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length		mm		8-10				8-10			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)					
Accessories											
Ferrule		/				/					
Slotted screwdriver size (Blade thickness x Width)		mm		0.4-2.5				0.4-2.5			
Bridge (2-10P 20P)				DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5				DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5			
End cover				D-DSIO1.5/3-1				D-DSIO1.5/3-1			
Partition plate		/				/					
Top marker				ZSF3.5				ZSF3.5			
Side marker				ZSF3.5				ZSF3.5			
Marker support		/				/					
Terminal strip marker support				DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp				E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Push-in connection technology

Sensor terminal blocks and actuator terminal blocks


DSIO1.5/4

CE ENE RoHS REACH


DSIO1.5/4-PE

CE ENE RoHS REACH

Order NO.		11040000248				11040000249			
Width/Length/Height(NS35/7.5&NS35/15) mm		3.5/90.9/41.5(49)				3.5/90.9/41.5(49)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Push-in connection technology

Sensor terminal blocks and actuator terminal blocks


**DSIO-IN
2.5/3 OG**

CE ENE RoHS REACH

Order NO.		11040000239			
Width/Length/Height(NS35/7.5&NS35/15) mm		7/74.4/41.5(49)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	250		300	
Rated current	A	20		10	
Rated cross section	mm² /AWG	0.2-4		26-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-4	0.2-2.5	0.2-2.5	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		°C (°F) -40(-40)~105(221)			
Stripping length		mm 10-12			
Color		Orange (please contact sales for other color requirements)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm 0.6x3.5			
Bridge (2-10P 20P)		DFB2-3.5	DFB3-3.5	DFB4-3.5	DFB6-3.5
		DFB7-3.5	DFB8-3.5	DFB9-3.5	DFB10-3.5
End cover		D-DSIO1.5/3-1			
Partition plate		/			
Top marker		ZB6 / ZS6			
Side marker		ZK6 / ZSF6			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

Push-in connection technology

Sensor terminal blocks
and actuator terminal
blocks




DSIO-IN
2.5/4-PE OG

CE ENEC RoHS REACH

Order NO.		11040000238			
Width/Length/Height(NS35/7.5&NS35/15) mm		7/90.9/41.5(49)			
Electrical Data		IEC IEC60947-7-1 IEC60947-7-2		UL UL1059	
Rated voltage	V	250		300	
Rated current	A	20		10	
Rated cross section	mm²/AWG	0.2-4		26-12	
Connection capacity		Solid	Stranded	Female (with and without plastic sleeve)	
1 conductor	mm²	0.2-4	0.2-2.5	0.2-2.5	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)			
Stripping length mm		10-12			
Color		Orange (please contact sales for other color requirements)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width) mm		0.6x3.5			
Bridge (2-10P 20P)		DFB2-3.5 DFB3-3.5 DFB4-3.5 DFB5-3.5 DFB6-3.5 DFB7-3.5 DFB8-3.5 DFB9-3.5 DFB10-3.5 DFB20-3.5			
End cover		D-DSIO1.5/4-1			
Partition plate		/			
Top marker		ZB6 / ZS6			
Side marker		ZK6 / ZSF6			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

DS Component Terminal Blocks


- DS diode terminal blocks can reach tool free wiring with the Push-in connection technology; Easy to remove the cable by push the orange button
- With diode element,can realize unidirectional conduction of the circuit
- Double-channel bridging design and 2-20 poles bridges reach the flexible distribution of potentials
- Compatible with the marking system to clearly identify the working area
- Equipped with test hole on the wiring position, easy to test the circuit

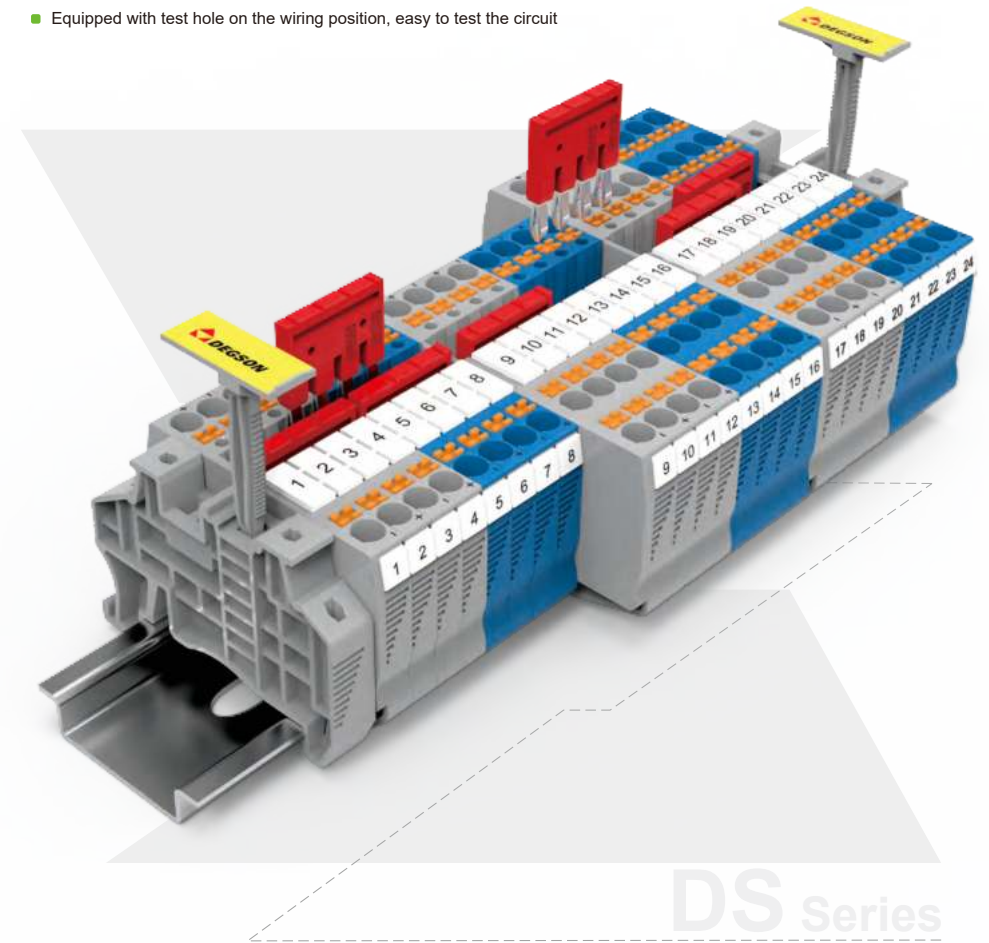

DS Series

Push-in connection technology

Component terminal blocks

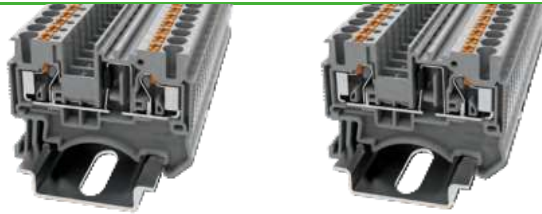

DS2.5-LD L-R



DS2.5-LD R-L

CE ENE RoHS REACH

CE ENE RoHS REACH

Order NO.		11040000232				11040000233			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/48.6/36.75(44.25)				5.2/48.6/36.75(44.25)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Accessories

Ferrule	/				/			
Slotted screwdriver size (Blade thickness x Width)	mm				10-12			
Bridge (2-10P 20P)								
End cover								
Partition plate	/				/			
Top marker								
Side marker								
Marker support								
Terminal strip marker support								
End clamp								

Push-in connection technology

Component terminal blocks



DS2.5-TW-LD L-R



DS2.5-TW-LD R-L

CE ENE RoHS REACH

CE ENE RoHS REACH


Order NO.		11040000199				11040000200			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/60.5/36.75(44.25)				5.2/60.5/36.75(44.25)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	300 (Reverse breakdown voltage 1.3KV)				300 (Reverse breakdown voltage 1.3KV)			
Rated current	A	1 (The brand of diode is BY133, with current of 1A)				1 (The brand of diode is BY133, with current of 1A)			
Rated cross section	mm²/AWG	0.14-4		26-12		0.14-4		26-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5	0.14-4	0.14-2.5	0.14-2.5	0.14-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5	—	—	—	0.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)				-40(-40)~105(221)			
Stripping length		mm				10-12			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			

Accessories


Ferrule	/				/			
Slotted screwdriver size (Blade thickness x Width)	mm				10-12			
Bridge (2-10P 20P)								
End cover								
Partition plate	/				/			
Top marker								
Side marker								
Marker support								
Terminal strip marker support								
End clamp								

Push-in connection technology

Fuse terminal blocks



DS4-HE-LD60



DS4-HE-LD250


CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.	11040000191	11040000164
Width/Length/Height(NS35/7.5&NS35/15) mm	6.2/55.6/36.8(44.3)	6.2/55.6/36.8(44.3)
Electrical Data	IEC IEC60947-7-3	IEC IEC60947-7-3
Rated voltage V	60 (Led voltage range 30-60V)	250 (Led voltage range 110-250V)
Rated current A	6.3	6.3
Rated cross section mm ² /AWG	0.2-6 24-10	0.2-6 24-10
Connection capacity	Solid Stranded Ferrule (with and without plastic sleeve)	Solid Stranded Ferrule (with and without plastic sleeve)
1 conductor mm ²	0.2-6 0.2-4 0.2-4 0.2-4	0.2-6 0.2-4 0.2-4 0.2-4
2 flexible conductors with a TWIN ferrule mm ²	— — — 0.5-1	— — — 0.5-1
General Information		
Insulation material/Flammability rating (according to UL 94)	PA/V0	PA/V0
Operation temperatures °C (°F)	-40(-40)~105(221)	-40(-40)~105(221)
Stripping length mm	11-13	11-13
Color	Black (please contact sales for other color requirements)	Black (please contact sales for other color requirements)
Accessories		
Ferrule	/	/
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5	0.6x3.5
Bridge (2-10P) 	DFB2-6.2 DFB3-6.2 DFB4-6.2 DFB5-6.2 DFB6-6.2 DFB7-6.2 DFB8-6.2 DFB9-6.2 DFB10-6.2	DFB2-6.2 DFB3-6.2 DFB4-6.2 DFB5-6.2 DFB6-6.2 DFB7-6.2 DFB8-6.2 DFB9-6.2 DFB10-6.2
End cover 	D-DS4-HE	D-DS4-HE
Partition plate	/	/
Top marker 	ZB6 / ZS6	ZB6 / ZS6
Side marker 	ZK6 / ZSF6	ZK6 / ZSF6
Marker support	/	/
Terminal strip marker support 	DLM2 / KLM3-20x8 / KLM3-44x8	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp 	E-PC 1100A / E-WS N	E-PC 1100A / E-WS N

DS Disconnect Terminal Blocks

- DS disconnect terminal blocks can reach tool free wiring with the Push-in connection technology; Easy to remove the cable by push the orange button
- The circuit can be disconnected, measured, controlled easily by operate the knife disconnecter. Equipped with test holes on both sides of the breaking point, convenient for testing the circuit
- Snap-on knife disconnecter to prevent accidental disconnection
- Universal breaking area to achieve different functions, can insert breaking plug, component plug, fuse plug

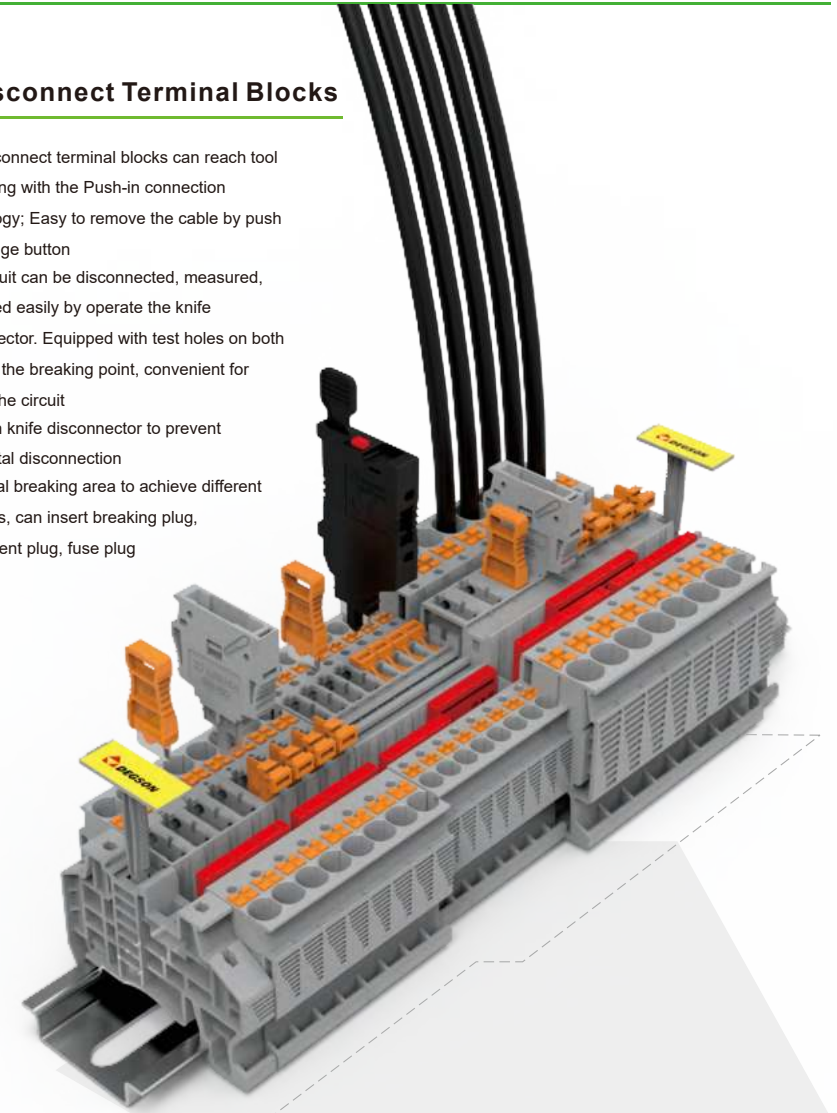

DS Series

Push-in connection technology

Component terminal blocks


DS2.5-QU-LD L-R

DS2.5-QU-LD R-L
CE ENEC RoHS REACH
CE ENEC RoHS REACH

Order NO.		11040000242				11040000243			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/72.2/36.75(44.25)				5.2/72.2/36.75(44.25)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Index List


Reducing bridging with standard DS feed-through terminal blocks

Supply		Pick-off		Single-sided supply	Central supply	Bridges
Terminal block	Cross section(mm ²)	Terminal block	Cross section(mm ²)	I _{max} (A)	I _{max} (A)	
DS2.5	2.5	DS1.5	1.5	24	30	DFB2.5/4-1.5
DS4	4	DS1.5	1.5	24	40	DFB2.5/4-1.5
		DS2.5	2.5	40	40	DFB2.5 or DFB4
DS6	6	DS1.5	1.5	24	48	DFB6-1.5
		DS2.5	2.5	40	56	DFB6-2.5/4
		DS4	4	45	56	
DS10	10	DS1.5	1.5	24	48	DFB10-1.5
		DS2.5	2.5	40	65	DFB10-2.5/4
		DS4	4	45	65	
DS16	16	DS1.5	1.5	24	48	DFB16-1.5
		DS2.5	2.5	40	80	DFB16-2.5/4
		DS4	4	45	90	


WS Spring-cage Structure

Feature

- Spring-cage connection technology with excellent anti-vibration
- Just use a common slotted screwdriver to realize wire connection and release
- Unique pluggable jumper, high circuit connection efficiency
- It has a complete product line to meet different customer needs
- Optional marker to avoid wire mis-inserting

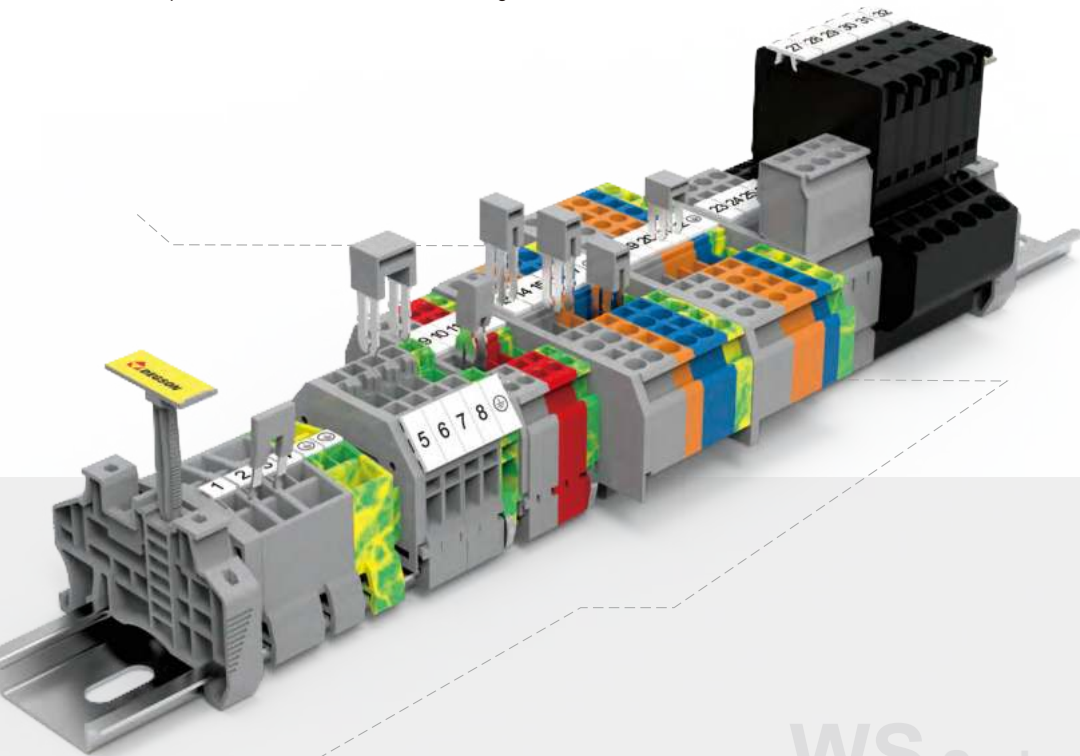

WS Series

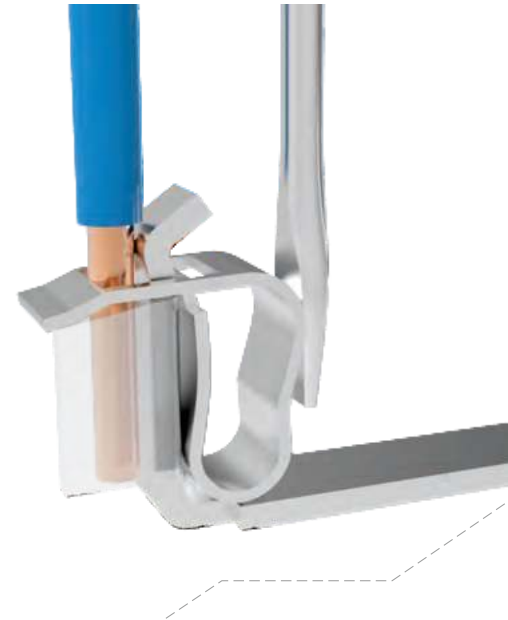


The WS spring-cage connection technology terminal block adopts imported stainless steel spring, and the unique production process can ensure excellent resilience and vibration resistance of the wiring. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66's plastic parts can meet the working environment of -40°C to 105°C, and all WS series of din rail products are in line with UL94 V0 flame retardant grade.


The spring-cage structure design makes the wiring efficiency higher than screw type. People just use a slotted screwdriver to connect solid wire or stranded wire processed by terminals.

WS Feed-through Terminal Blocks

- WS feed-through terminal blocks, with spring-cage connection technology ensure the good performance on anti-vibration
- Compact design saves space
- Compatible with the marking system to clearly identify the working area

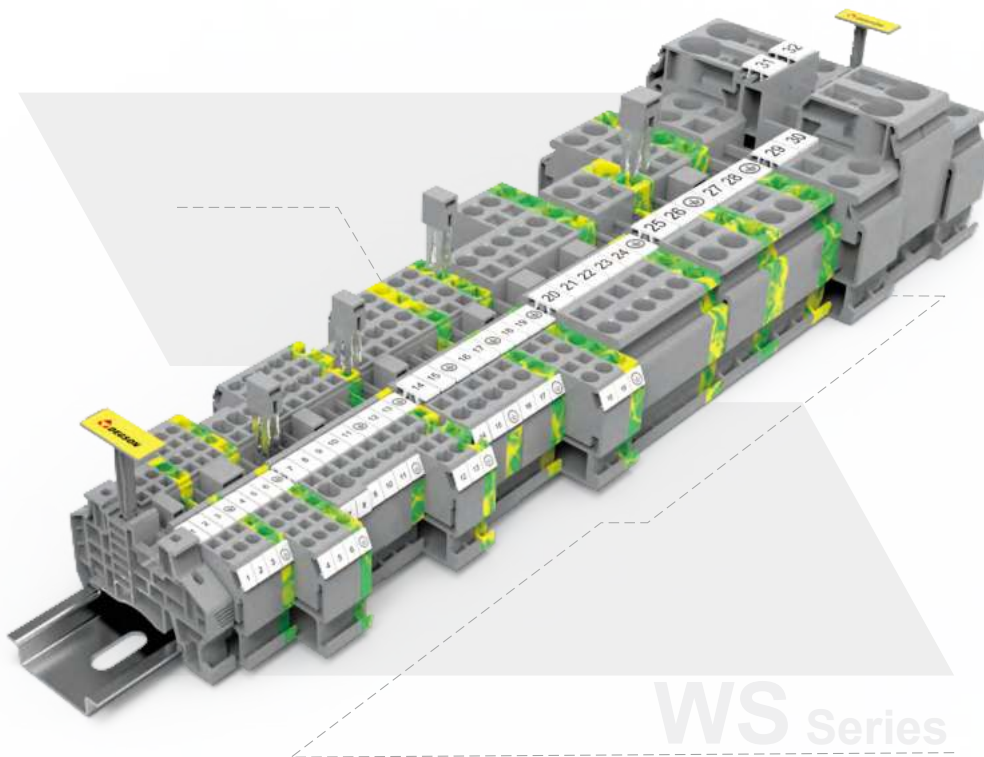

WS Series

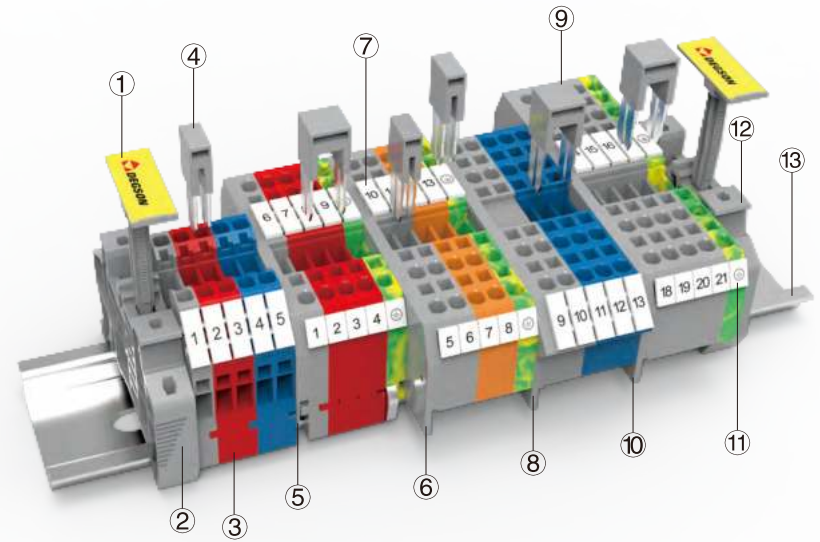

Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	WS1.5-SD-01P-11-00A(H)	Spring-cage type 1.5mm ² DIN Rail terminal blocks
④ Adjacent jumper	WFA1.5-01P-11-00A(H)	02P bridge, use for WS1.5 series
⑤ End cover	D-WS1.5-01P-11-00A(H)	End cover is used for WS1.5&WS1.5-PE
⑥ End cover	D-WS1.5-TW-01P-11-00A(H)	End cover is used for WS1.5-TW&WS1.5-TW-PE
⑦ Marker	ZB4-10P-19-00A(H)	Marker is used for the top of WS1.5 series
⑧ End cover	D-WS1.5-QU-01P-11-100A(H)	End cover is used for WS1.5-QU-100A(H)
⑨ Alternate jumper	WFB1.5-01P-11-00A(H)	02P bridge, use for WS1.5 series
⑩ End cover	D-WS1.5-QU-01P-11-00A(H)	End cover is used for WS1.5-QU-100A(H)
⑪ Marker	DEK4-50P-19-00A(H)	Marker is used for the side of WS1.5 series
⑫ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑬ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		— — Fuse connection		— — Disconnecting
	• Connection point for bridging		— — Resistance connection		• Circuit connection point
	— — LED light connection		— — Grounding connection		— — Diode connection

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS1.5

UL CE ENE RoHS REACH


WS1.5-PE

CE ENE RoHS REACH

Order NO.		11030000027				11030000064			
Width/Length/Height(NS35/7.5&NS35/15) mm		4/51.8/34.55(42.05)				4/51.8/34.55(42.05)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage V		800		600		/		/	
Rated current A		18		10		/		/	
Rated cross section mm ² /AWG		0.2-1.5		28-16		0.2-1.5		28-16	
Connection capacity		Solid Stranded Ferrule (with and without plastic sleeve)				Solid Stranded Ferrule (with and without plastic sleeve)			
1 conductor mm ²		0.2-1.5	0.2-1.5	0.2-1.5	0.2-1	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1
2 flexible conductors with a TWIN ferrule mm ²		—	—	—	0.5	—	—	—	0.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		8-9				8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		0.4x2.5				0.4x2.5			
Adjacent jumper 		WFA1.5				/			
Alternate jumper 		WFB1.5				/			
Staggered jumper		/				/			
End cover 		D-WS1.5				D-WS1.5			
Partition plate		/				/			
Top marker 		ZB4 / WB4				ZB4 / WB4			
Side marker 		DEK4				DEK4			
Warning cover 		EEA1.5				EEA1.5			
Marker support 		DTH3.5-25x3.5 / DTH3.5-25x12				DTH3.5-25x3.5 / DTH3.5-25x12			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS1.5-TW

UL CE ENE RoHS REACH



WS1.5-TW-PE

CE ENE RoHS REACH

Order NO.		11030000077				11030000080			
Width/Length/Height(NS35/7.5&NS35/15) mm		4/62.5/34.55(42.05)				4/62.5/34.55(42.05)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	800		600		/		/	
Rated current	A	18		10		/		/	
Rated cross section	mm² /AWG	0.2-1.5		28-16		0.2-1.5		28-16	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5	—	—	—	0.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)				-40(-40)~105(221)			
Stripping length		mm				8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)		mm				0.4x2.5			
Adjacent jumper						WFA1.5			
Alternate jumper						WFB1.5			
Staggered jumper						/			
End cover						D-WS1.5-TW			
Partition plate						/			
Top marker						ZB4 / WB4			
Side marker						DEK4			
Warning cover						EEA1.5			
Marker support						DTH3.5-25x3.5 / DTH3.5-25x12			
Terminal strip marker support						DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp						E-PC 1100A / E-WS N			

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks

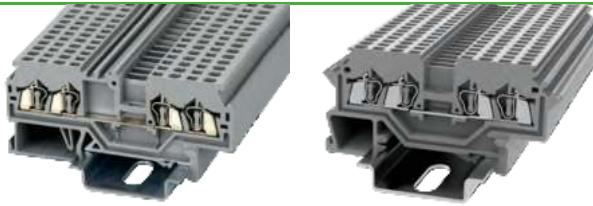
WS1.5-QU

CE ENEC RoHS REACH


WS1.5-QU-100A(H)

CE ENEC RoHS REACH

Order NO.		11030000065				11030000068			
Width/Length/Height(NS35/7.5&NS35/15) mm		4/73/34.55(42.05)				4/73/34.55(42.05)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS1.5-QU-PE

CE ENEC RoHS REACH

Order NO.		11030000070			
Width/Length/Height(NS35/7.5&NS35/15) mm		4/73/34.55(42.05)			
Electrical Data		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	/		/	
Rated current	A	/		/	
Rated cross section	mm² /AWG	0.2-1.5		28-16	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		℃ (°F)		-40(-40)~105(221)	
Stripping length		mm		8-9	
Color		Yellow green mixed color			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm		0.4x2.5	
Adjacent jumper		/			
Alternate jumper		/			
Staggered jumper		/			
End cover		D-WS1.5-QU			
Partition plate		/			
Top marker		ZB4 / WB4			
Side marker		DEK4			
Warning cover		EEA1.5			
Marker support		DTH3.5-25x3.5 / DTH3.5-25x12			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

Spring-cage connection technology


Feed-through, multi-conductor and ground terminal blocks

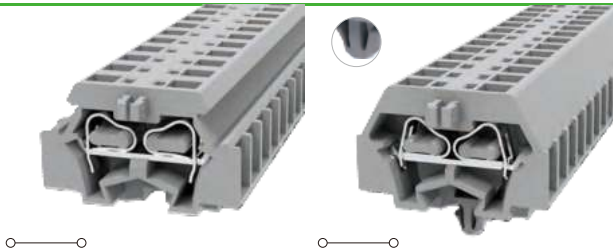
WS1.5-DB
WS1.5-DB-11A(H)


Order NO.		11030000035				11030000326													
Width/Length/Height		mm		5/25/17				5/25/17											
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059											
Rated voltage		V		800		300		800		300									
Rated current		A		17.5		10		17.5		10									
Rated cross section		mm²/AWG		0.2-1.5		28-16		0.2-1.5		28-16									
Connection capacity				Solid		Stranded		Ferrule (with and without plastic sleeve)		Solid		Stranded		Ferrule (with and without plastic sleeve)					
1 conductor		mm²		0.2-15		0.2-1.5		0.2-1.5		0.2-1.5		0.2-15		0.2-1.5		0.2-1			
2 flexible conductors with a TWIN ferrule		mm²		—		—		—		0.5		—		—		—		0.5	
General Information																			
Insulation material/Flammability rating (according to UL 94)				PA/V0						PA/V0									
Operation temperatures				°C (°F)		-40(-40)~105(221)						-40(-40)~105(221)							
Stripping length				mm		8-9						8-9							
Color				Grey, Red, Blue (please contact sales for other color requirements)															
Accessories																			
Ferrule				/						/									
Slotted screwdriver size (Blade thickness x Width)				mm		0.4x2.5						0.4x2.5							
End cover						D-WS1.5-DB						D-WS1.5-DB							
Partition plate				/															
Marker (Side)						DEK5						/							
Warning cover				/															
DIN rail mounting adapter						WHH-WS1.5-DB						/							
Terminal strip marker support				/															
End clamp				/															

Spring-cage connection technology


Feed-through, multi-conductor and ground terminal blocks

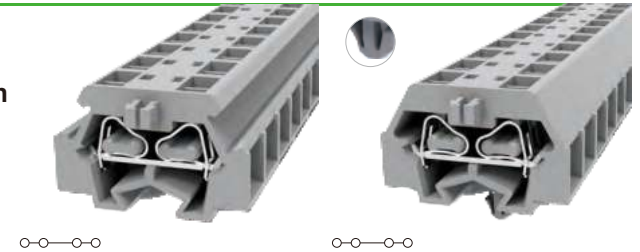
WS1.5T-DB
WS1.5T-DB-11A(H)


Order NO.		11030000072				11030000393			
Width/Length/Heightmm		8/25/17				8/25/17			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltageV		800		300		800		300	
Rated currentA		17.5		10		17.5		10	
Rated cross sectionmm ² /AWG		0.2-1.5		28-16		0.2-1.5		28-16	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductormm ²		0.2-1.5	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1
2 flexible conductors with a TWIN ferrulemm ²		—	—	—	0.5	—	—	—	0.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures℃ (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping lengthmm		8-9				8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)mm		0.4x2.5				0.4x2.5			
End cover 		D-WS1.5-DB				D-WS1.5-DB			
Partition plate		/				/			
Marker (Side) 		DEK4				/			
Warning cover		/				/			
DIN rail mounting adapter 		WHH-WS1.5-DB				/			
Terminal strip marker support		/				/			
End clamp		/				/			

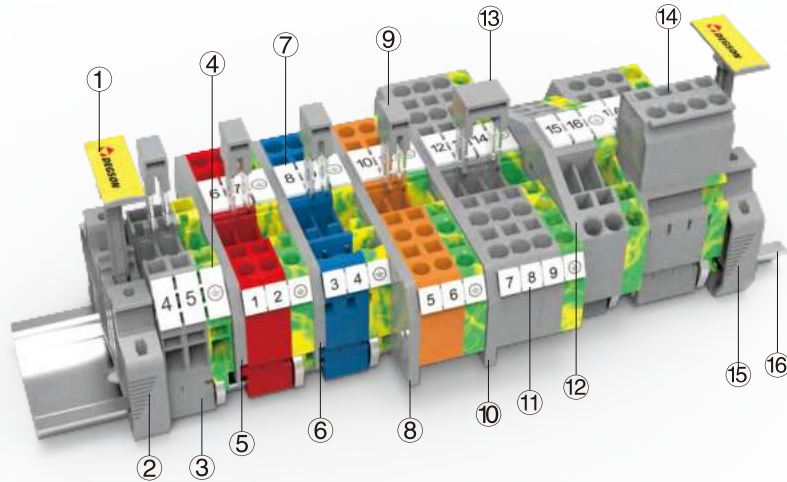

Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	WS2.5-SD-01P-11-00A(H)	Spring-cage type 2.5mm ² DIN Rail terminal blocks
④ Marker	ZB5-10P-19-00A(H)	Marker is used for the side of WS2.5-SD series
⑤ End cover	D-WS2.5-01P-11-00A(H)	End cover is used for WS2.5&WS2.5-PE
⑥ End cover	D-WS2.5P-01P-11-00A(H)	End cover is used for WS2.5P&WS2.5P-PE
⑦ Marker	ZB5-10P-19-00A(H)	Marker is used for the top of WS2.5 series
⑧ End cover	D-WS2.5-TW-01P-11-00A(H)	End cover is used for WS2.5-TW&WS2.5-TW-PE
⑨ Adjacent jumper	WFA2.5-01P-11-00A(H)	02P bridge, use for WS2.5 series
⑩ End cover	D-WS2.5-QU-01P-11-00A(H)	End cover is used for WS2.5-QU&WS2.5-QU-PE
⑪ Marker	DEK5-50P-19-00A(H)	Marker is used for the side of WS2.5 series
⑫ End cover	D-WS2.5-TW-TA-01P-11-00A(H)	End cover is used for WS2.5-TW-TA&WS2.5-TW-TA-PE
⑬ Alternate jumper	E-WS N-01P-11-00A(H)	02P bridge, use for WS2.5 series
⑭ Plug	8EDGK-5.0-04P-11-01A(H)	Mating with WS2.5P&WS2.5P-PE
⑮ End Clamp	E-WS-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑯ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

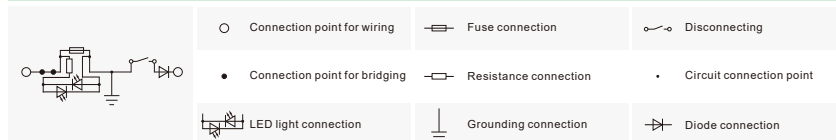Circuit diagram

Spring-cage connection technology

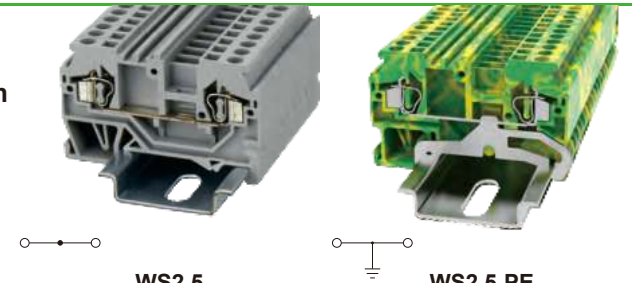Feed-through, multi-conductor and ground terminal blocks


WS2.5
WS2.5-PE

Order NO.		11030000106				11030000184									
Width/Length/Height(NS35/7.5&NS35/15)		mm		5/53/35.45(42.95)				5/53/35.45(42.95)							
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059							
Rated voltage		V		800		600		/		/					
Rated current		A		24		15		/		/					
Rated cross section		mm²/AWG		0.2-2.5		28-14		0.2-2.5		28-14					
Connection capacity		Solid		Stranded		Ferrule (with and without plastic sleeve)		Solid		Stranded		Ferrule (with and without plastic sleeve)			
1 conductor		mm²		0.2-2.5		0.2-2.5		0.2-2.5		0.2-2.5		0.2-2.5			
2 flexible conductors with a TWIN ferrule		mm²		—		—		—		—		0.5			
General Information															
Insulation material/Flammability rating (according to UL 94)				PA/V0				PA/V0							
Operation temperatures				°C (°F)		-40(-40)~105(221)				-40(-40)~105(221)					
Stripping length				mm		8-9				8-9					
Color				Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color							
Accessories															
Ferrule				/				/							
Slotted screwdriver size (Blade thickness x Width)				mm		0.4x2.5				0.4x2.5					
Adjacent jumper						WFA2.5				/					
Alternate jumper						WFB2.5				/					
Staggered jumper						WFC2.5-2 WFC2.5-6		WFC2.5-3 WFC2.5-7		WFC2.5-4 WFC2.5-8		WFC2.5-5		/	
End cover						D-WS2.5				D-WS2.5					
Partition plate						/				/					
Top marker						ZB5 / WB5				ZB5 / WB5					
Side marker						DEK5				DEK5					
Warning cover						EEA2.5				EEA2.5					
Marker support						DTH5-25x5 / DTH5-25x12				DTH5-25x5 / DTH5-25x12					
Terminal strip marker support						DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8					
End clamp						E-PC 1100A / E-WS N				E-PC 1100A / E-WS N					

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS2.5-TW

UL US CE ENE RoHS REACH CQC



WS2.5-TW-PE

UL US CE ENE RoHS REACH

Order NO.		11030000236				11030000264			
Width/Length/Height(NS35/7.5&NS35/15) mm		5/64.2/35.45(42.95)				5/64.2/35.45(42.95)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage V		800		600		/		/	
Rated current A		24		15		/		/	
Rated cross section mm²/AWG		0.2-2.5		28-14		0.2-2.5		28-14	
Connection capacity		Solid Stranded Ferrule (with and without plastic sleeve)				Solid Stranded Ferrule (with and without plastic sleeve)			
1 conductor mm²		0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5
2 flexible conductors with a TWIN ferrule mm²		—	—	—	0.5	—	—	—	0.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		9				9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		0.5x3.5				0.5x3.5			
Adjacent jumper 		WFA2.5				/			
Alternate jumper 		WFB2.5				/			
Staggered jumper 		WFC2.5-2 WFC2.5-6	WFC2.5-3 WFC2.5-7	WFC2.5-4 WFC2.5-8	WFC2.5-5	/			
End cover 		D-WS2.5-TW				D-WS2.5-TW			
Partition plate		/				/			
Top marker 		ZB5 / WB5				ZB5 / WB5			
Side marker 		DEK5				DEK5			
Warning cover 		EEA2.5				EEA2.5			
Marker support 		DTH5-25x5 / DTH5-25x12				DTH5-25x5 / DTH5-25x12			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS2.5-QU

UL US CE ENE RoHS REACH CQC



WS2.5-QU-PE

CE ENE RoHS REACH

Order NO.		11030000190				11030000194			
Width/Length/Height(NS35/7.5&NS35/15) mm		5/75.5/35.45(42.95)				5/75.5/35.45(42.95)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS2.5-DB
WS2.5-DB-11A(H)

Order NO.		11030000577				11030000133			
Width/Length/Height		mm				6/28/18			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage		V		800		300		800	
Rated current		A		24		15		24	
Rated cross section		mm²/AWG		0.2-2.5		28-14		0.2-2.5	
Connection capacity		Solid		Stranded		Ferrule (with and without plastic sleeve)		Solid	
1 conductor		mm²		0.2-2.5		0.2-2.5		0.2-2.5	
2 flexible conductors with a TWIN ferrule		mm²		—		—		—	
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		°C (°F)		-40(-40)~105(221)		-40(-40)~105(221)			
Stripping length		mm		8-9		8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)		mm		0.5x3.5		0.5x3.5			
End cover				D-WS1.5-DB		D-WS1.5-DB			
Partition plate				/		/			
Marker (Side)				DEK6		/			
Warning cover				/		/			
DIN rail mounting adapter				WHH-WS1.5-DB		/			
Terminal strip marker support				/		/			
End clamp				/		/			

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS2.5-DIN15
WS2.5-DIN35

Order NO.		11030000153				11030000155			
Width/Length/Height		mm6/32/31.88				6/32/31.88			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage		V800		600		800		600	
Rated current		A24		20		24		20	
Rated cross section		mm²/AWG0.2-2.5		28-12		0.2-2.5		28-12	
Connection capacity		SolidStrandedFerrule (with and without plastic sleeve)				SolidStrandedFerrule (with and without plastic sleeve)			
1 conductor		mm²0.2-2.5		0.2-2.50.2-2.50.2-2.5		0.2-2.50.2-2.5		0.2-2.50.2-2.5	
2 flexible conductors with a TWIN ferrule		mm²—		—0.5		—		—0.5	
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		°C (°F)-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length		mm8-9				8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)		mm0.5x3.5				0.5x3.5			
Adjacent jumper(2P)		 WFE-2.5				WFE-2.5			
End cover		 D-WS2.5-MID-CO				D-WS2.5-MID-CO			
Partition plate		/				/			
Marker (Side)		 ZW5				ZW5			
Warning cover		/				/			
DIN rail mounting adapter		 WHH-WS1.5-DB				/			
Terminal strip marker support		/				/			
End clamp		/				/			

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS2.5-MID-CO
WS2.5-END-CO

UL CE ENE RoHS REACH

UL CE ENE RoHS REACH

Order NO.		11030000157				11030000156					
Width/Length/Height		mm		6/32/22				12/32/22			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059			
Rated voltage		V		800600		800600					
Rated current		A		2420		2420					
Rated cross section		mm²/AWG		0.2-2.528-12		0.2-2.528-12					
Connection capacity				SolidStrandedFerrule (with and without plastic sleeve)		SolidStrandedFerrule (with and without plastic sleeve)					
1 conductor		mm²		0.2-2.50.2-2.50.2-1.50.2-1.5		0.2-2.50.2-2.50.2-1.50.2-1.5					
2 flexible conductors with a TWIN ferrule		mm²		— — — 0.5		— — — 0.5					
General Information											
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0					
Operation temperatures		°C (°F)		-40(-40)~105(221)		-40(-40)~105(221)					
Stripping length		mm		8-9		8-9					
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)					
Accessories											
Ferrule		/				/					
Slotted screwdriver size (Blade thickness x Width)		mm		0.5x3.5		0.5x3.5					
Adjacent jumper(2P)				WFE-2.5		WFE-2.5					
Alternate jumper		/				/					
Staggered jumper		/				/					
End cover				D-WS2.5-MID-CO		D-WS2.5-MID-CO					
Partition plate		/				/					
Top marker				ZW5		ZW5					
Side marker		/				/					
Warning cover		/				/					
Marker support		/				/					
Terminal strip marker support		/				/					
End clamp		/				/					

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS2.5T-DB
WS2.5T-DB-11A(H)

UL CE ENE RoHS REACH

UL CE ENE RoHS REACH

Order NO.		11030000197				11030000373			
Width/Length/Height		mm10/28/18				mm10/28/18			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage		V800		V300		V800		V300	
Rated current		A24		A15		A24		A15	
Rated cross section		mm²/AWG0.2-2.5		mm²/AWG28-14		mm²/AWG0.2-2.5		mm²/AWG28-14	
Connection capacity		SolidStrandedFerrule (with and without plastic sleeve)				SolidStrandedFerrule (with and without plastic sleeve)			
1 conductor		mm²0.2-2.5		mm²0.2-2.50.2-2.50.2-2.5		mm²0.2-2.5		mm²0.2-2.50.2-2.50.2-2.5	
2 flexible conductors with a TWIN ferrule		mm²—		mm²—0.5		mm²—		mm²—0.5	
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		°C (°F)-40(-40)~105(221)				°C (°F)-40(-40)~105(221)			
Stripping length		mm8-9				mm8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)		mm0.5x3.5				mm0.5x3.5			
Adjacent jumper(2P)		 WFE-2.5				 WFE-2.5			
End cover		 D-WS2.5-DB				 D-WS2.5-DB			
Partition plate		/				/			
Marker (Side)		 DEK5				/			
Warning cover		/				/			
DIN rail mounting adapter		 WHH-WS1.5-DB				/			
Terminal strip marker support		/				/			
End clamp		/				/			

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS2.5T-DIN15
WS2.5T-DIN35


Order NO.		11030000226				11030000688			
Width/Length/Height		mm10/32/31.88				10/32/31.88(39.38)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage		V800		600		800		600	
Rated current		A24		20		24		20	
Rated cross section		mm²/AWG0.2-2.5		28-12		0.2-2.5		28-12	
Connection capacity		SolidStrandedFerrule (with and without plastic sleeve)				SolidStrandedFerrule (with and without plastic sleeve)			
1 conductor		mm²0.2-2.5		0.2-2.50.2-1.50.2-1.5		0.2-2.50.2-2.5		0.2-1.50.2-1.5	
2 flexible conductors with a TWIN ferrule		mm²—		—0.5		—		—0.5	
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		°C (°F)-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length		mm8-9				8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)		mm0.5x3.5				0.5x3.5			
Adjacent jumper		/				/			
End cover		D-WS2.5-MID-CO				D-WS2.5-MID-CO			
Partition plate		/				/			
Marker (Side)		ZW5				ZW5			
Warning cover		/				/			
DIN rail mounting adapter		/				/			
Terminal strip marker support		/				/			
End clamp		/				/			
DIN rail		NS15				NS35/7.5 & NS35/15 Steel and Aluminium alloy are optional)			

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS2.5T-MID-CO
WS2.5T-END-CO

Order NO.		11030000229				11030000228			
Width/Length/Heightmm		10/32/22				10/32/22			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltageV		800		600		800		600	
Rated currentA		24		20		24		20	
Rated cross sectionmm ² /AWG		0.2-2.5		28-12		0.2-2.5		28-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductormm ²		0.2-2.5	0.2-2.5	0.2-1.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5	0.2-1.5
2 flexible conductors with a TWIN ferrulemm ²		—	—	—	0.5	—	—	—	0.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures℃ (℉)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping lengthmm		8-9				8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)mm		0.5x3.5				0.5x3.5			
Adjacent jumper		/				/			
Alternate jumper		/				/			
Staggered jumper		/				/			
End cover 		D-WS2.5-MID-CO				D-WS2.5-MID-CO			
Partition plate		/				/			
Top marker 		ZW5				ZW5			
Side marker		/				/			
Warning cover		/				/			
Marker support		/				/			
Terminal strip marker support		/				/			
End clamp		/				/			

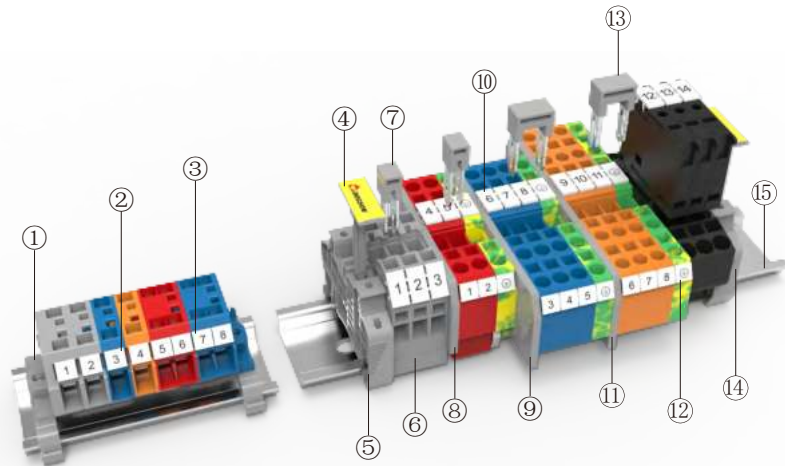


Description	Part No.	Remark
① Mounting foot with screw	WHH-WS1.5-DB-01P-11-00A(H)	For DIN35, can be screwed on terminal blocks with mounting flange
② Marker	DEK6-50P-19-00A(H)	Marker is used for the side of WS4-DB series
③ Marker	DEK6-50P-19-00A(H)	Marker is used for the side of WS4T-DB series
④ Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
⑤ End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑥ Terminal blocks	WS4-SD-01P-11-00A(H)	Spring-cage type 4mm ² DIN Rail terminal blocks
⑦ Adjacent jumper	WFA4-01P-11-00A(H)	02P bridge, use for WS4 series
⑧ End cover	D-WS4-01P-11-00A(H)	End cover is used for WS4&WS4-PE
⑨ End cover	D-WS4-TW-01P-11-00A(H)	End cover is used for WS4-TW&WS4-TW-PE
⑩ Marker	ZB6-10P-19-00A(H)	Marker is used for the top of WS4 series
⑪ End cover	D-WS4-QU-01P-11-00A(H)	End cover is used for WS4-QU&WS4-QU-PE
⑫ Marker	DEK6-50P-19-00A(H)	Marker is used for the side of WS4 series
⑬ Alternate jumper	WFB4-01P-11-00A(H)	02P bridge, use for WS4 series
⑭ End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑮ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

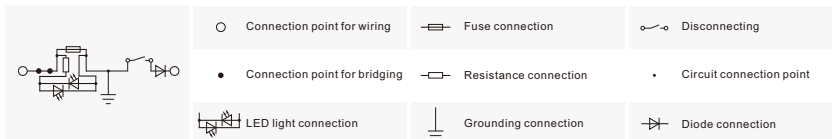

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks

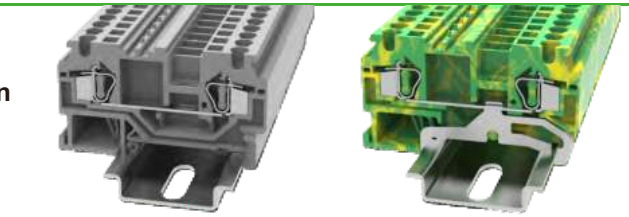

WS4	WS4-PE

Order NO.	11030000273	11030000291
Width/Length/Height(NS35/7.5&NS35/15) mm	6/60.4/36.45(43.95)	6/60.4/36.45(43.95)
Electrical Data	IEC IEC60947-7-1	UL UL1059
Rated voltage V	800	600
Rated current A	24	15
Rated cross section mm ² /AWG	0.2-4	28-12
Connection capacity	Solid Stranded Ferrule (with and without plastic sleeve)	Solid Stranded Ferrule (with and without plastic sleeve)
1 conductor mm ²	0.2-4	0.2-4
2 flexible conductors with a TWIN ferrule mm ²	—	—

General Information

Insulation material/Flammability rating (according to UL 94)	PA/V0
Operation temperatures °C (°F)	-40(-40)~105(221)
Stripping length mm	13-14
Color	Grey, Red, Blue (please contact sales for other color requirements)

Accessories

Ferrule	/
Slotted screwdriver size (Blade thickness x Width) mm	0.5x3.5
Adjacent jumper	WFA4
Alternate jumper	WFB4
Staggered jumper	/
End cover	D-WS4
Partition plate	/
Top marker	ZB6
Side marker	DEK6
Warning cover	EEA4
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp	E-PC 1100A / E-WS N

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS4-DB

CE ENE RoHS REACH

Order NO.		11030000281			
Width/Length/Height		mm7/33.4/23			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage		V630		300	
Rated current		A32		20	
Rated cross section		mm²/AWG0.2-4		28-12	
Connection capacity		SolidStrandedFerrule (with and without plastic sleeve)			
1 conductor		mm²0.2-4		0.2-40.2-40.2-4	
2 flexible conductors with a TWIN ferrule		mm²—		—0.5-1	
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		°C (°F)-40(-40)~105(221)			
Stripping length		mm10-11			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm0.5x3.5			
Adjacent jumper		/			
End cover		 D-WS4-DB			
Partition plate		/			
Marker (Side)		 DEK6			
Warning cover		/			
DIN rail mounting adapter		 WHH-WS1.5-DB			
Terminal strip marker support		/			
End clamp		/			

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS4-TW

CE ENE RoHS REACH CQC



WS4-TW-PE

CE ENE RoHS REACH CQC

Order NO.		11030000302				11030000305			
Width/Length/Height(NS35/7.5&NS35/15) mm		6/73.5/36.45(43.95)				6/73.5/36.45(43.95)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	800		600		/		/	
Rated current	A	32		20		/		/	
Rated cross section	mm ² /AWG	0.2-4		28-12		0.2-4		28-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4	0.2-4
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-1	—	—	—	0.5-1
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		10-12				10-12			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		0.5x3.5				0.5x3.5			
Adjacent jumper 		WFA4				/			
Alternate jumper 		WFB4				/			
Staggered jumper		/				/			
End cover 		D-WS4-TW				D-WS4-TW			
Partition plate		/				/			
Top marker 		ZB6				ZB6			
Side marker 		DEK6				DEK6			
Warning cover 		EEA4				EEA4			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-WS / E-PC / E-MK / E-WS N			

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks

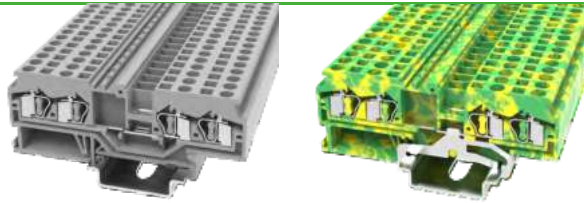

WS4-QU

UL CE ENE RoHS REACH CQC



WS4-QU-PE

UL CE ENE RoHS REACH CQC

Order NO.		11030000292				11030000294													
Width/Length/Height(NS35/7.5&NS35/15)		mm		6/86.2/36.45(43.95)				6/86.2/36.45(43.95)											
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059											
Rated voltage		V		800		600		/		/									
Rated current		A		32		20		/		/									
Rated cross section		mm²/AWG		0.2-4		28-12		0.2-4		28-12									
Connection capacity		Solid		Stranded		Ferrule (with and without plastic sleeve)		Solid		Stranded		Ferrule (with and without plastic sleeve)							
1 conductor		mm²		0.2-4		0.2-4		0.2-2.5		0.2-2.5		0.2-4		0.2-4		0.2-2.5		0.2-2.5	
2 flexible conductors with a TWIN ferrule		mm²		—		—		—		0.5-1		—		—		—		0.5-1	
General Information																			
Insulation material/Flammability rating (according to UL 94)				PA/V0				PA/V0											
Operation temperatures				℃ (°F)				-40(-40)~105(221)				-40(-40)~105(221)							
Stripping length				mm				11-12				11-12							
Color				Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color											
Accessories																			
Ferrule				/				/											
Slotted screwdriver size (Blade thickness x Width)				mm				0.5x3.5				0.5x3.5							
Adjacent jumper								WFA4				/							
Alternate jumper								WFB4				/							
Staggered jumper								/				/							
End cover								D-WS4-QU				D-WS4-QU							
Partition plate								/				/							
Top marker								ZB6				ZB6							
Side marker								DEK6				DEK6							
Warning cover								EEA4				EEA4							
Terminal strip marker support								DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8							
End clamp								E-PC 1100A / E-WS N				E-PC 1100A / E-WS N							

Spring-cage connection technology


Feed-through, multi-conductor and ground terminal blocks




WS4T-DB

UL CE ENE RoHS REACH

Order NO.		11030000299			
Width/Length/Height		mm12/33.4/23			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage		V800		V300	
Rated current		A32		A20	
Rated cross section		mm²/AWG0.2-4		mm²/AWG28-12	
Connection capacity		Solid		Stranded	
		Femle (with and without plastic sleeve)			
1 conductor		mm²0.2-4		mm²0.2-4	
2 flexible conductors with a TWIN ferrule		mm²—		mm²0.5-1	
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		°C (°F)-40(-40)~105(221)			
Stripping length		mm10-11			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm0.5x3.5			
Adjacent jumper		/			
End cover		D-WS4-DB			
Partition plate		/			
Marker (Side)		DEK6			
Warning cover		/			
DIN rail mounting adapter		WHH-WS1.5-DB			
Terminal strip marker support		/			
End clamp		/			

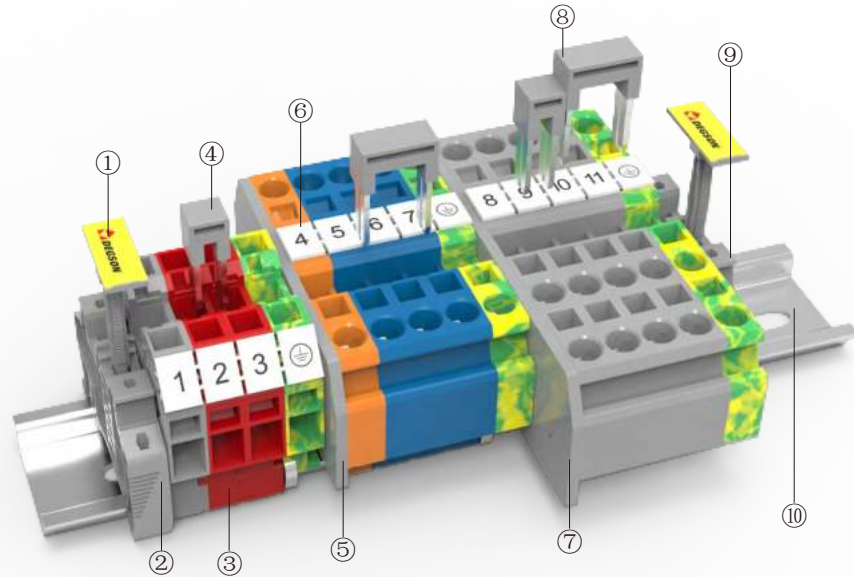

Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	WS6-SD-01P-11-00A(H)	Spring-cage type 6mm ² DIN Rail terminal blocks
④ Adjacent jumper	WFA6-01P-11-00A(H)	02P bridge, use for WS6 series
⑤ End cover	D-WS6-01P-11-00A(H)	End cover is used for WS6&WS6-PE
⑥ Marker	ZB8-10P-19-00A(H)	Marker is used for the top of WS6 series
⑦ End cover	D-WS6-TW-01P-11-00A(H)	End cover is used for WS6-TW&WS6-TW-PE
⑧ Alternate jumper	WFB6-01P-11-00A(H)	02P bridge, use for WS6 series
⑨ End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑩ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

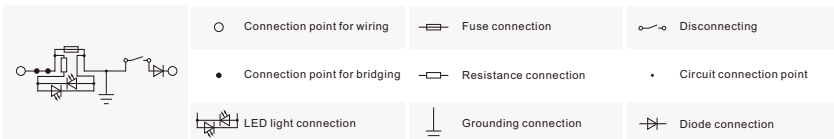Circuit diagram

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS6
WS6-PE

Order NO.		11030000306				11030000314			
Width/Length/Height(NS35/7.5&NS35/15) mm		8/74.5/40(47.5)				8/74.5/40(47.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	800		600		/		/	
Rated current	A	41		30		/		/	
Rated cross section	mm²/AWG	0.2-6		24-10		0.2-6		24-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-6	0.2-6	0.2-6	0.2-6	0.2-6	0.2-6	0.2-6	0.2-6
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-2.5	—	—	—	0.5-2.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		12-13				12-13			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		0.8x5.5				0.8x5.5			
Adjacent jumper 		WFA6				/			
Alternate jumper 		WFB6				/			
Staggered jumper		/				/			
End cover 		D-WS6				D-WS6			
Partition plate		/				/			
Top marker 		ZB8				ZB8			
Side marker		/				/			
Warning cover 		EEA6				EEA6			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-WS / E-PC / E-MK / E-WS N			

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS6-TW

UL CE ENE RoHS REACH


WS6-TW-PE

CE ENE RoHS REACH

Order NO.		11030000320				11030000322			
Width/Length/Height(NS35/7.5&NS35/15) mm		8/93/40(47.5)				8/93/40(47.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

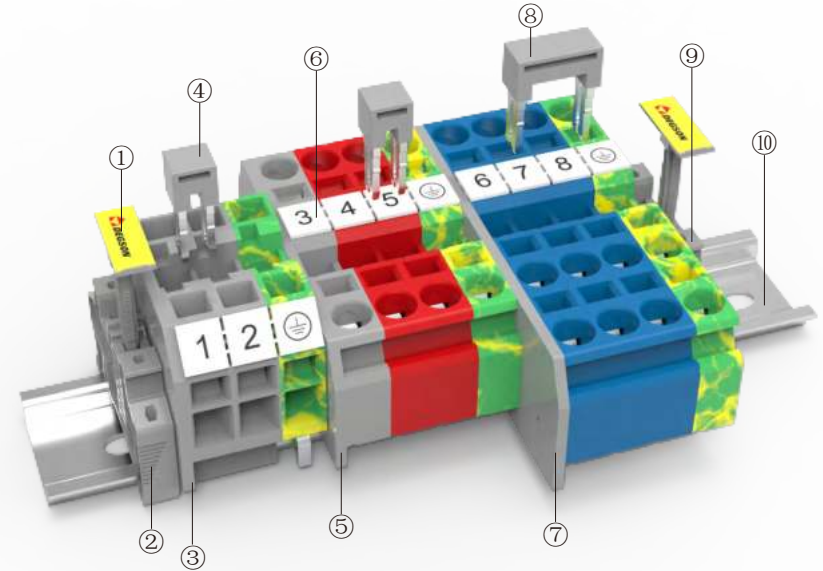

Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ End cover	D-WS10-SD-01P-11-00A(H)	End cover is used for WS10-SD&WS10-SD-PE
④ Adjacent jumper	WFA10-01P-11-00A(H)	02P bridge, use for WS10 series
⑤ End cover	D-WS10-01P-11-00A(H)	End cover is used for WS10&WS10-PE
⑥ Marker	ZB10-10P-19-00A(H)	Marker is used for the top of WS10 series
⑦ End cover	D-WS10-TW-01P-11-00A(H)	End cover is used for WS10-TW&WS10-TW-PE
⑧ Alternate jumper	WFB10-01P-11-00A(H)	02P bridge, use for WS10 series
⑨ End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑩ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		Fuse connection		Disconnecting
	● Connection point for bridging		Resistance connection		Circuit connection point
	LED light connection		Grounding connection		Diode connection

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks


WS10

CE ENEC RoHS REACH


WS10-PE

CE ENEC RoHS REACH

Order NO.		11030000001				11030000020			
Width/Length/Height(NS35/7.5&NS35/15) mm		10/77.5/42.5(50)				10/77.5/42.5(50)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS10-TW

CE ENEC RoHS REACH



WS10-TW-PE

CE ENEC RoHS REACH

Order NO.		11030000023				11030000026			
Width/Length/Height(NS35/7.5&NS35/15) mm		10/97.5/42.5(50)				10/97.5/42.5(50)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	800		600		/		/	
Rated current	A	57		50		/		/	
Rated cross section	mm²/AWG	0.2-10		24-8		0.2-10		24-8	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-10	0.2-10	0.2-10	0.2-10	0.2-10	0.2-10	0.2-10	0.2-10
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-4	—	—	—	0.5-4
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		13-14				13-14			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		0.8x5.5				0.8x5.5			
Adjacent jumper 		WFA10				/			
Alternate jumper 		WFB10				/			
Staggered jumper		/				/			
End cover 		D-WS10-TW				D-WS10-TW			
Partition plate		/				/			
Top marker 		ZB10				ZB10			
Side marker		/				/			
Warning cover 		EEA10				EEA10			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-WS / E-PC / E-MK / E-WS N			

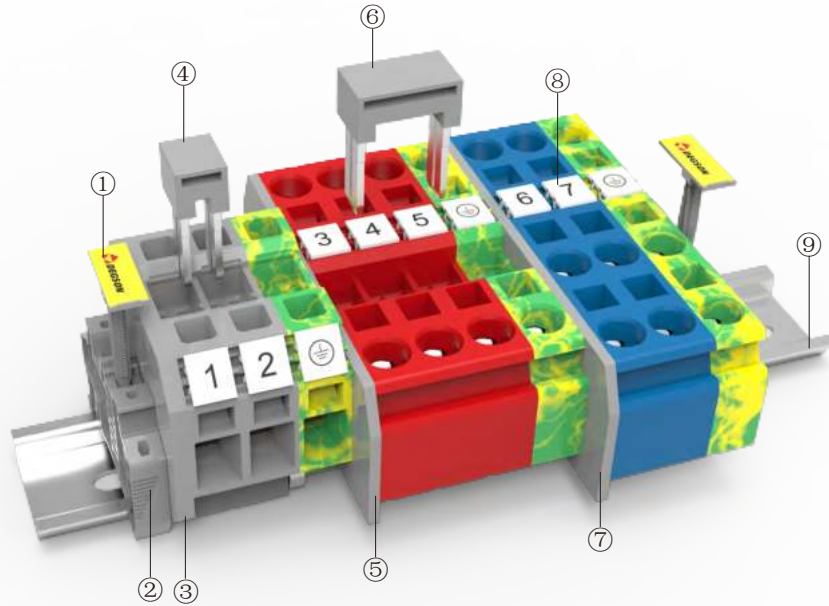

Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ End cover	D-WS16-SD-01P-11-00A(H)	End cover is used for WS16-SD&WS16-SD-PE
④ Adjacent jumper	WFA16-01P-11-00A(H)	02P bridge, use for WS16 series
⑤ End cover	D-WS16-01P-11-00A(H)	End cover is used for WS16&WS16-PE
⑥ Alternate jumper	WFB16-01P-11-00A(H)	02P bridge, use for WS16 series
⑦ End cover	D-WS16-TW-01P-11-00A(H)	End cover is used for WS16-TW&WS16-TW-PE
⑧ Marker	ZT12-10P-19-00A(H)	Marker is used for the top of WS16 series
⑨ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

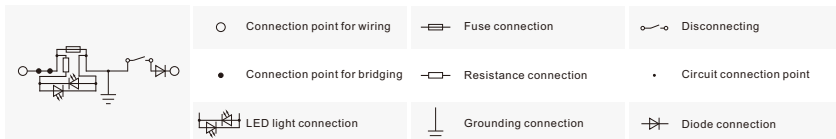Circuit diagram

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS16

WS16-PE

Order NO.		11030000081				11030000085			
Width/Length/Height(NS35/7.5&NS35/15) mm		12/94.5/45(52.5)				12/94.5/45(52.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS16-TW

CE ENE RoHS REACH


WS16-TW-PE

CE ENE RoHS REACH

Order NO.		11030000089				11030000091			
Width/Length/Height(NS35/7.5&NS35/15) mm		12/104.5/45(52.5)				12/104.5/45(52.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

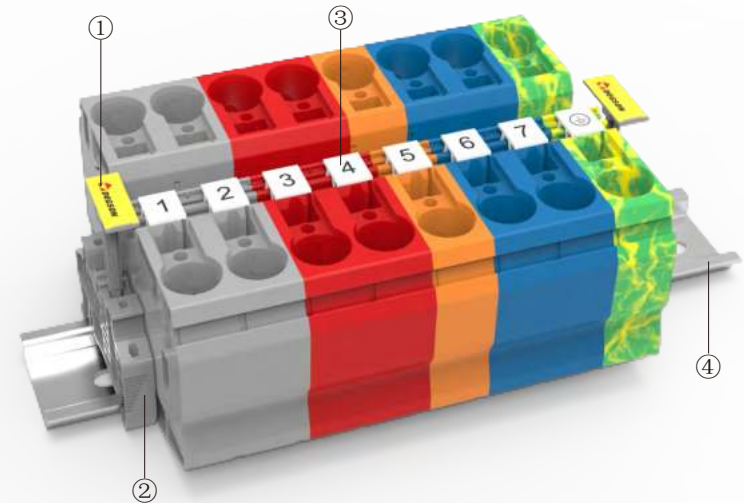


Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Marker	ZT12-10P-19-00A(H)	Marker is used for the top of WS35 series
④ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	Connection point for wiring		Fuse connection		Disconnecting
	Connection point for bridging		Resistance connection		Circuit connection point
	LED light connection		Grounding connection		Diode connection

Spring-cage connection technology

Feed-through and ground terminal blocks

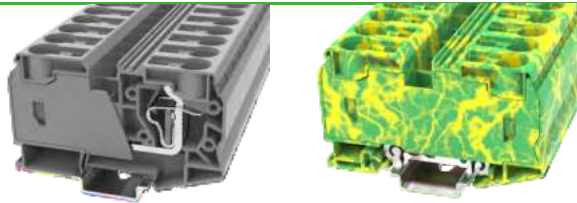

WS35

CE ENEC RoHS REACH




WS35-PE

CE ENEC RoHS REACH

Order NO.		11030000266				11030000269			
Width/Length/Height(NS35/7.5&NS35/15) mm		16/99.9/59.2(66.7)				16/99.9/59.2(66.7)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

WS Inclined Feed-through Terminal Blocks


- WS Inclined feed-through terminal blocks, with spring-cage connection technology ensure the good performance on anti-vibration
- Inclined design reduce the bend radius for easier wire connection
- Compatible with the marking system to clearly identify the working area

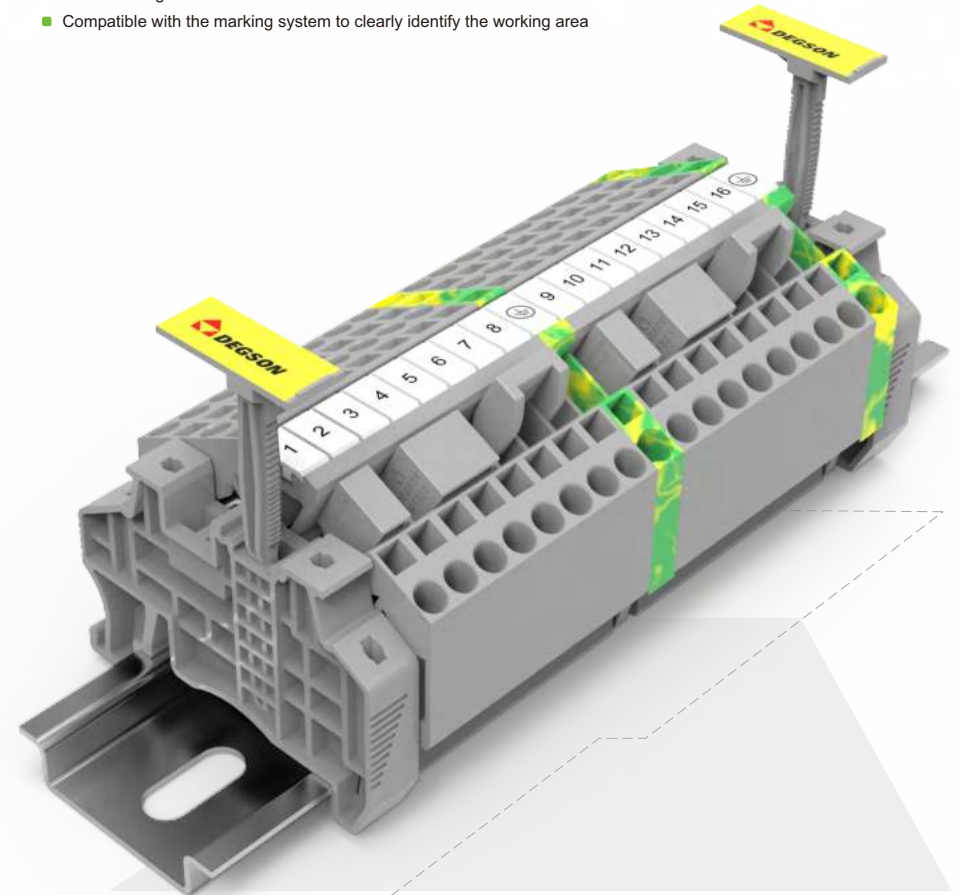

WS Series

Spring-cage connection technology

Inclined Feed-through Terminal Blocks

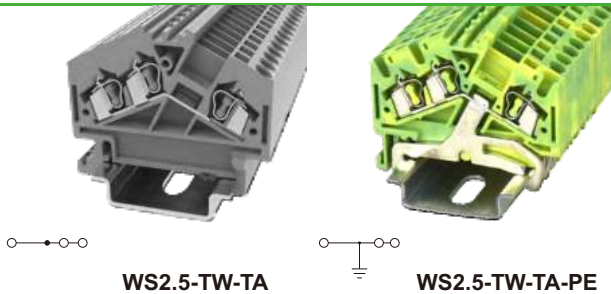


CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11030000261				11030000265													
Width/Length/Height(NS35/7.5&NS35/15)		mm		5/50.5/43.65(51.15)				5/50.5/43.65(51.15)											
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059											
Rated voltage		V		800		600		/		/									
Rated current		A		24		15		/		/									
Rated cross section		mm²/AWG		0.2-2.5		28-14		0.2-2.5		28-14									
Connection capacity				Solid		Stranded		Ferrule (with and without plastic sleeve)		Solid		Stranded		Ferrule (with and without plastic sleeve)					
1 conductor		mm²		0.2-2.5		0.2-2.5		0.2-2.5		0.2-2.5		0.2-2.5		0.2-2.5					
2 flexible conductors with a TWIN ferrule		mm²		—		—		—		0.5		—		—		—		0.5	
General Information																			
Insulation material/Flammability rating (according to UL 94)				PA/V0				PA/V0											
Operation temperatures				°C (°F)				-40(-40)~105(221)				-40(-40)~105(221)							
Stripping length				mm				9				9							
Color								Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color							
Accessories																			
Ferrule								/				/							
Slotted screwdriver size (Blade thickness x Width)				mm				0.5x3.5				0.5x3.5							
Adjacent jumper								WFA2.5				/							
Alternate jumper								WFB2.5				/							
Staggered jumper								WFC2.5-2 WFC2.5-6		WFC2.5-3 WFC2.5-7		WFC2.5-4 WFC2.5-8		WFC2.5-5		/			
End cover								D-WS2.5-TW-TA				D-WS2.5-TW-TA							
Partition plate								/				/							
Top marker				 				ZB5 / WB5				ZB5 / WB5							
Side marker								/				/							
Warning cover								EEA2.5				EEA2.5							
Terminal strip marker support								DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8							
End clamp								E-PC 1100A / E-WS N				E-PC 1100A / E-WS N							

WS Fuse Terminal Blocks



- WS Fuse type terminal blocks, with spring-cage connection technology ensure the good performance on anti-vibration
- Snap-on fuse box for easy fuse replacement
- Equipped with LED indicator for quick identification of fusing status
- Compatible with the marking system to clearly identify the working area

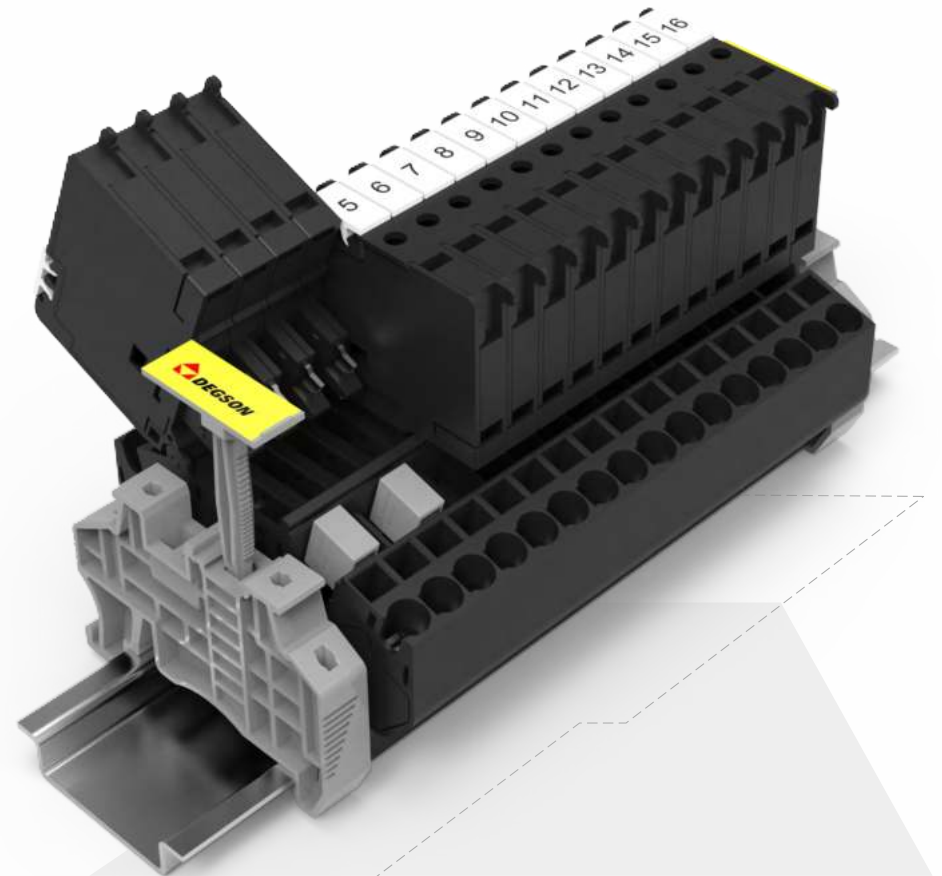

WS Series

Spring-cage connection technology


Fuse terminal blocks(5X20)

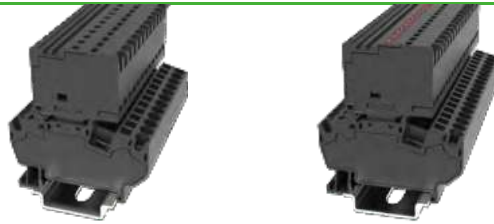
WSF4-TA

WSF4-TA-08A(H)

Order NO.		11030000324				11030000386									
Width/Length/Height(NS35/7.5&NS35/15)		mm		6/60/68(75.5)				6/60/68(75.5)							
Electrical Data		IEC IEC60947-7-3		UL UL1059		IEC IEC60947-7-3									
Rated voltage		V		400		300		24 (Led voltage range 12~30V)							
Rated current		A		6.3		6.3		6.3							
Rated cross section		mm²/AWG		0.2-4		28-10		0.2-4		28-10					
Connection capacity				Solid		Stranded		Ferrule (with and without plastic sleeve)		Solid		Stranded		Ferrule (with and without plastic sleeve)	
1 conductor		mm²		0.2-4		0.2-4		0.2-4		0.2-4		0.2-4		0.2-4	
2 flexible conductors with a TWIN ferrule		mm²		—		—		—		0.5-1		—		—	
General Information															
Insulation material/Flammability rating (according to UL 94)				PA/V0				PA/V0							
Operation temperatures				℃ (°F)				-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length				mm				10-12				10-12			
Color				(please contact sales for other color requirements)				Black (please contact sales for other color requirements)				Black (please contact sales for other color requirements)			
Accessories															
Ferrule				/				/							
Slotted screwdriver size (Blade thickness x Width)				mm		0.5x3.5		0.5x3.5							
Adjacent jumper						WFA4		WFA4							
Alternate jumper						WFB4		WFB4							
Staggered jumper						/		/							
End cover						/		/							
Partition plate						/		/							
Top marker						ZB6		ZB6							
Side marker						/		/							
Warning cover						EEA4		EEA4							
Terminal strip marker support						DLM2 / KLM3-20x8 / KLM3-44x8		DLM2 / KLM3-20x8 / KLM3-44x8							
End clamp						E-PC 1100A / E-WS N		E-PC 1100A / E-WS N							

Spring-cage connection technology


Fuse terminal blocks(5X20)


WSF4-TA-10A(H)

Order NO.		11030000691			
Width/Length/Height(NS35/7.5&NS35/15)		mm6/60/68(75.5)			
Electrical Data		IEC IEC60947-7-3			
Rated voltage	V	250			
Rated current	A	10			
Rated cross section	mm² /AWG	0.2-4		28-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-4	0.2-4	0.2-4	0.2-4
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-1
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)			
Stripping length	mm	10-12			
Color		Black (please contact sales for other color requirements)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	0.5x3.5			
Adjacent jumper		WFA4			
Alternate jumper		WFB4			
Staggered jumper		/			
End cover		/			
Partition plate		/			
Top marker		ZB6			
Side marker		/			
Warning cover		EEA4			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

WS Component Terminal Blocks

- WS diode terminal blocks, with spring-cage connection technology ensure the good performance on anti-vibration
- With diode element, can realize unidirectional conduction of the circuit
- Compatible with the marking system to clearly identify the working area

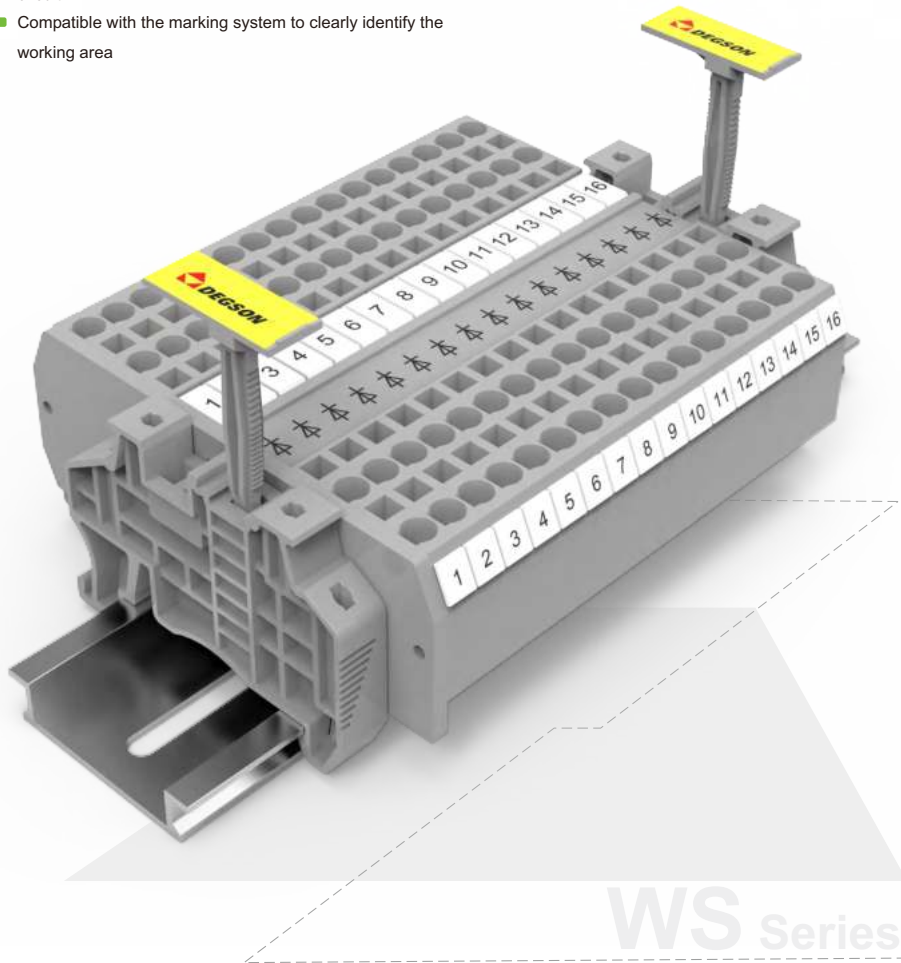


WS Series


Spring-cage connection technology



Component terminal blocks



WS2.5-QU-LD-L-R



WS2.5-QU-LD-R-L

CE ENEC RoHS REACH

CE ENEC RoHS REACH


Order NO.		11030000567				11030000492			
Width/Length/Height(NS35/7.5&NS35/15) mm		5/75.5/35.45,(42.95)				5/75.5/35.45(42.95)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage & Reverse voltage									

DC Steel Cage Locking Structure




Feature

- Steel screw connection technology, reliable connection
- Double channel for bridging can make circuit connection test more flexible
- Unique pluggable jumper, high circuit connection efficiency
- Optional marker to avoid wire mis-inserting

DC Series

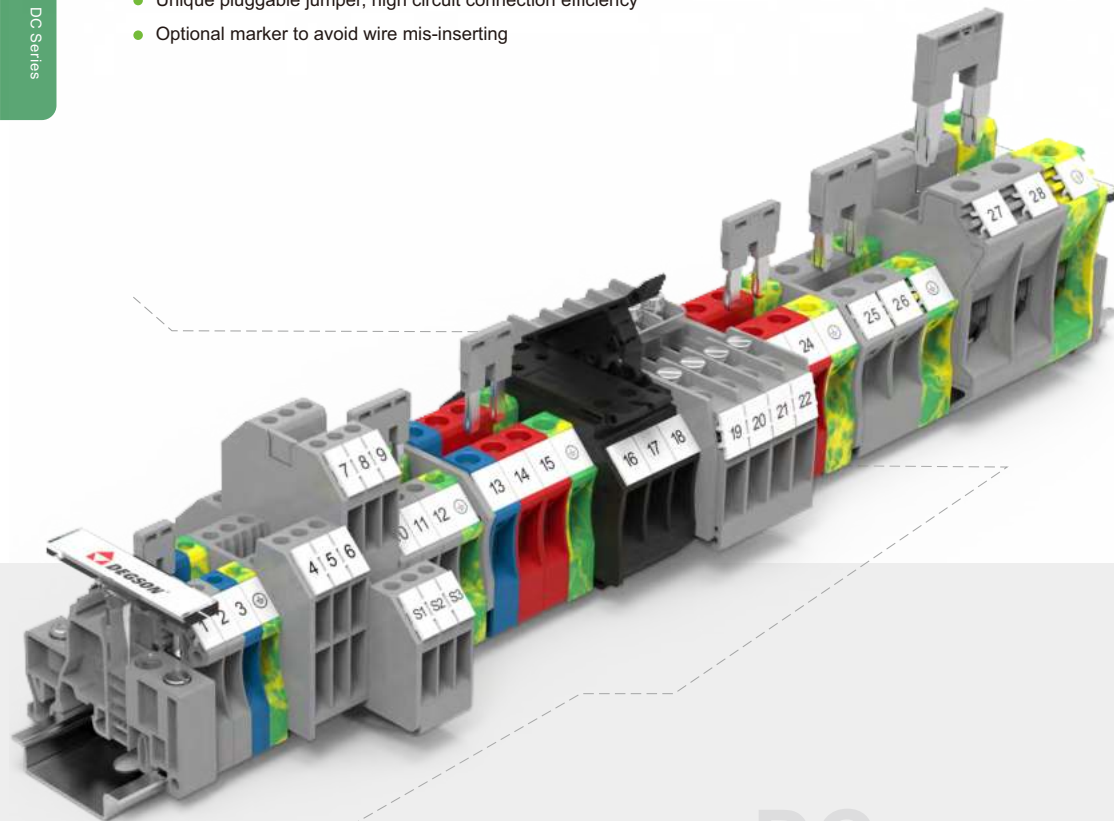

DC Series




DC Series


DC steel screw connection technology terminal block, use steel screw and steel cage to clamp wire, good torque and shock resistance. High-precision copper alloy conductors provide the lowest temperature rise, ensuring the connection is reliable and safe. PA66 material plastic parts can meet the working environment of -40°C to 105°C, and all DC series of din rail products are in line with UL94 V0 flame retardant grade. Compact structure design for superior product performance.

DC Feed-through Terminal Blocks

- DC Feed-through terminal blocks, with screw connection technology, high-quality steel screw and cage ensure the stable & reliable connection
- Multi-deck type, space saving
- Double-channel bridging design and 2-10 poles bridges reach the flexible distribution of potentials
- Compatible with the marking system to clearly identify the working area

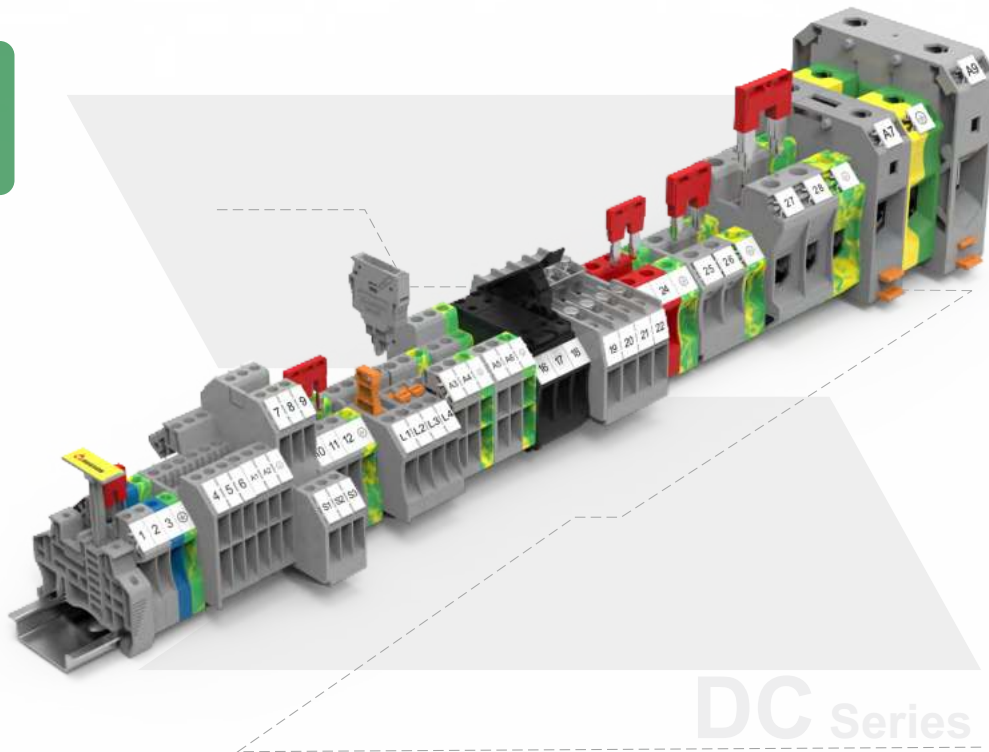

DC Series

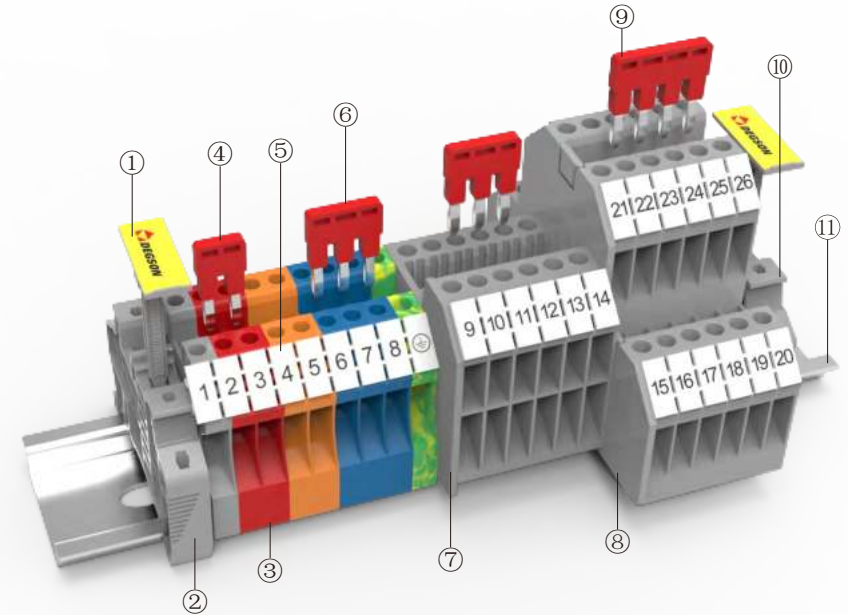


Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	DC2.5-01P-11-00A(H)	Steel cage locking type 2.5mm ² DIN Rail terminal blocks
④ Plug-in bridge	DFA2.5-02P-11-00A(H)	02P bridge, use for DC2.5 series
⑤ Marker	ZB5-10P-19-00A(H)	Marker is used for the side of DC2.5 series
⑥ Plug-in bridge	DFA2.5-03P-11-00A(H)	03P bridge, use for DC2.5 series
⑦ End cover	D-DC2.5-TW-01P-11-00A(H)	End cover is used for DC2.5-TW
⑧ End cover	D-DCKKB2.5-01P-11-00A(H)	End cover is used for DCKKB2.5
⑨ Plug-in bridge	DFA2.5-04P-11-00A(H)	04P bridge, use for DC2.5 series
⑩ End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑪ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		— Fuse connection		⏏ Disconnecting
	• Connection point for bridging		— Resistance connection		• Circuit connection point
	LED light connection		— Grounding connection		— Diode connection

Screw connection technology 1

Feed-through, multi-conductor, multi-level, and ground terminal blocks



DC2.5

DC2.5-PE


UL CE ENE RoHS REACH

UL CE ENE RoHS REACH

Order NO.		11020000018				11020000028			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.1/42.3/41.5(49)				5.1/42.3/41.5(49)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Screw connection technology 1

Feed-through, multi-conductor, multi-level, and ground terminal blocks


DC2.5-12A(H)
(Cross & Slotted screw)

DC2.5-PE-02A(H)
(Cross & Slotted screw)


UL CE ENE RoHS REACH

UL CE ENE RoHS REACH

Order NO.		11020000058				11020000221			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.1/42.3/41.5(49)				5.1/42.3/41.5(49)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	800		600		/		/	
Rated current	A	24		25		/		/	
Rated cross section	mm²/AWG	0.2-4		26-12		0.2-4		26-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-4	0.2-2.5	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-1.5	—	—	—	0.5-1.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		°C (°F)		-40(-40)~105(221)		-40(-40)~105(221)			
Stripping length		mm		8-9		8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Screw/Rated torque		-/N.m(lb.in)(kgf.cm)		M2.5/0.4 (3.6) (4.08)		M2.5/0.4 (3.6) (4.08)			
Accessories									
Ferrule		/				/			
Cross & Slotted Screwdriver specification (Thickness x Width) mm		0.6x3.5				0.6x3.5			
Screw		Cross & Slotted screw				Cross & Slotted screw			
Bridge (2-10P) 		DFA2.5				/			
End cover 		D-DC2.5				D-DC2.5			
Partition plate		/				/			
Marker 		ZB5 / WB5				ZB5 / WB5			
Marker support		/				/			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Screw connection technology 1

Feed-through, multi-conductor, multi-level, and ground terminal blocks

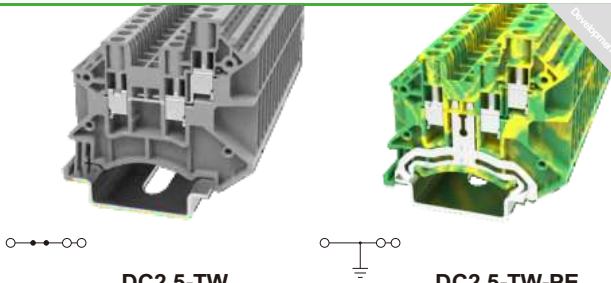

DC2.5-TW

DC2.5-TW-PE


CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11020000067				/			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.1/48.7/49.2(56.7)				5.1/76/63(70.5)			
Electrical Data		IEC IEC60947-7-1		UL UL 1059		IEC IEC60947-7-2		UL UL 1059	
Rated voltage									

Screw connection technology 1

Feed-through, multi-conductor, multi-level, and ground terminal blocks


DC2.5-TW-02A(H)
(Cross & Slotted screw)

CE ENEC RoHS REACH

Order NO.		11020000222			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.1/48.7/49.2(56.7)			
Electrical Data		IEC IEC60947-7-1		UL UL 1059	
Rated voltage	V	1000		600	
Rated current	A	24		20	
Rated cross section	mm ² /AWG	0.2-4		26-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-4	0.2-2.5	0.2-2.5	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-1
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	°C (°F)	-40(-40)~105(221)			
Stripping length	mm	10-11			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque	-/N.m(lb.in)(kgf.cm)	M2.5/0.4 (3.6)(4.08)			
Accessories					
Ferrule		/			
Cross & Slotted Screwdriver specification (Thickness x Width)	mm	0.6x3.5			
Screw		Cross & Slotted screw			
Bridge (2-10P)		DFA2.5			
End cover		D-DC2.5-TW			
Partition plate		/			
Marker		ZB5 / WB5			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			


Screw connection technology 1

Feed-through, multi-conductor, multi-level, and ground terminal blocks



DC2.5-QU

CE ENE RoHS REACH



DC2.5-QU-PE

CE ENE RoHS REACH

Order NO.		11020000214				11020000215			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.1/54.4/49.2 (56.7)				5.1/54.4/49.2 (56.7)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Screw connection technology 1

Feed-through, multi-conductor, multi-level, and ground terminal blocks



DCKKB2.5

CE ENE RoHS REACH



DCKKB2.5-PV

CE ENE RoHS REACH

Order NO.		11020000073				11020000075			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.1/76/63(70.5)				5.1/76/63(70.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Screw connection technology 1

Feed-through, multi-conductor, multi-level, and ground terminal blocks




DCKKB2.5-PE

CE ENEC RoHS REACH

Order NO.		11020000069			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.1/76/63(70.5)			
Electrical Data		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	/		/	
Rated current	A	/		/	
Rated cross section	mm ² /AWG	0.5-4		26-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.5-4	0.5-2.5	0.5-2.5	0.5-2.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-1
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)			
Stripping length mm		8-10			
Color		Yellow green mixed color			
Screw/Rated torque ~/N.m(lb.in)/(kgf.cm)		M2.5/0.4 (3.6) (4.08)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width) mm		0.6x3.5			
Screw		Slotted screw			
Bridge (2-10P)		DFA2.5			
End cover		D-DCKKB2.5			
Partition plate		/			
Marker		ZB5 / WB5			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

Screw connection technology 1

Feed-through, multi-conductor, multi-level, and ground terminal blocks



DCKKB2.5-02A(H)
(Cross & Slotted screw)

CE ENEC RoHS REACH



DCKKB2.5-PV-02A(H)
(Cross & Slotted screw)

CE ENEC RoHS REACH

Order NO.		11020000074				/			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.1/76/63(70.5)				5.1/76/63(70.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Screw connection technology 1

Feed-through, multi-conductor, multi-level, and ground terminal blocks




DCKKB2.5-PE-02A(H)
(Cross & Slotted screw)

CE ENEC RoHS REACH

Order NO.		11020000194			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.1/76/63(70.5)			
Electrical Data		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	/		/	
Rated current	A	/		/	
Rated cross section	mm ² /AWG	0.5-4		26-12	
Connection capacity		Solid	Stranded	Femle (with and without plastic sleeve)	
1 conductor	mm ²	0.5-4	0.5-2.5	0.5-2.5	0.5-2.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-1
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	°C (°F)	-40(-40)~105(221)			
Stripping length	mm	8-10			
Color		Yellow green mixed color			
Screw/Rated torque	-/N.m(lb.in)(kgf.cm)	M2.5/0.4 (3.6) (4.08)			

Accessories	
Ferrule	/
Cross & Slotted Screwdriver specification (Thickness x Width)	mm 0.6x3.5
Screw	Cross & Slotted screw
Bridge (2-10P)	DFA2.5
End cover	D-DCKKB2.5
Partition plate	/
Marker	ZB5 / WB5
Marker support	/
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp	E-PC 1100A / E-WS N

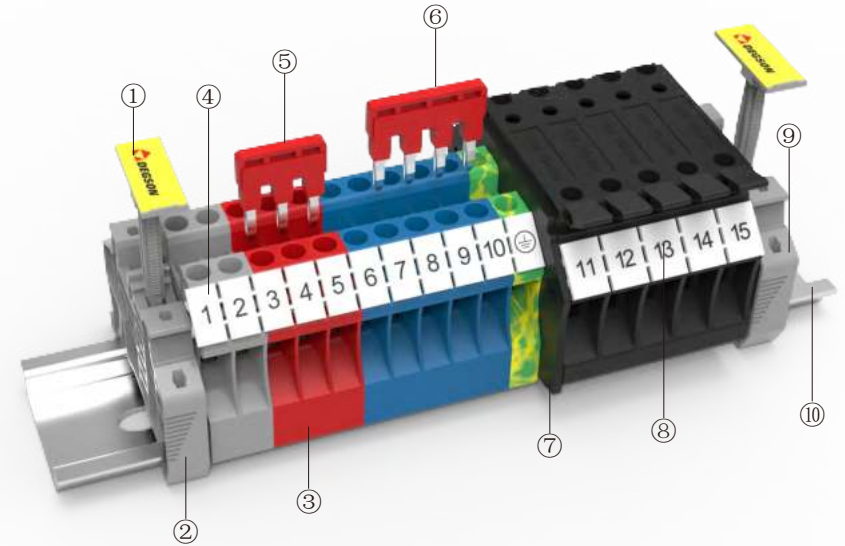


Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	DC2.5-01P-11-00A(H)	Steel cage locking type 4mm ² DIN Rail terminal blocks
④ Marker	ZB6-10P-19-00A(H)	Marker is used for the side of DC4 series
⑤ Plug-in bridge	DFA4-03P-11-00A(H)	03P bridge, use for DC4 series
⑥ Plug-in bridge	DFA2.5-04P-11-00A(H)	04P bridge, use for DC4 series
⑦ End cover	D-DC4-HE-01P-13-00A(H)	End cover is used for DC4-HE
⑧ Marker	ZB8-10P-19-00A(H)	Marker is used for the side of DC4-HE
⑨ End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑩ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	Connection point for wiring		Fuse connection		Disconnecting
	Connection point for bridging		Resistance connection		Circuit connection point
	LED light connection		Grounding connection		Diode connection

Screw connection technology 1

Feed-through and ground terminal blocks



DC4

UL US CE ENE RoHS REACH





DC4-PE

UL US CE ENE RoHS REACH

Order NO.		11020000035				11020000046			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.1/42.3/41.9(49.4)				6.1/42.3/41.9(49.4)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Screw connection technology 1

Feed-through and ground terminal blocks


DC4-12A(H)
(Cross & Slotted screw)

UL US CE ENE RoHS REACH



DC4-PE-02A(H)
(Cross & Slotted screw)

UL US CE ENE RoHS REACH

Order NO.		11020000059				11020000220			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.1/42.3/41.9(49.4)				6.1/42.3/41.9(49.4)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	1000		600		/		/	
Rated current	A	32		30		/		/	
Rated cross section	mm ² /AWG	0.5-4		22-10		0.5-4		22-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.5-6	0.5-4	0.5-4	0.5-4	0.5-6	0.5-4	0.5-4	0.5-4
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-1.5	—	—	—	0.5-1.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)				-40(-40)~105(221)			
Stripping length		mm				8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Screw/Rated torque		-/N.m(lb.in)(kgf.cm)				M3/0.5(4.5)(5.1)			
M3/0.5(4.5)(5.1)									
Accessories									
Ferrule		/				/			
Cross & Slotted Screwdriver specification (Thickness x Width) mm		0.6x3.5				0.6x3.5			
Screw		Cross & Slotted screw				Cross & Slotted screw			
Bridge (2-10P)		DFA4				/			
End cover		D-DC2.5				D-DC2.5			
Partition plate		/				/			
Marker		ZB6				ZB6			
Marker support		/				/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Screw connection technology 1

Feed-through and ground terminal blocks



DC4-TW

CE ENEC RoHS REACH




DC4-TW-PE

CE ENEC RoHS REACH

Order NO.	11020000229				11020000230				
Width/Length/Height(NS35/7.5&NS35/15)	mm	6.2/50.9/49.2□ 56.7□				6.2/50.9/49.2□ 56.7□			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	500		300		/		/	
Rated current	A	32		30		/		/	
Rated cross section	mm²/AWG	0.5-4		20-12		0.5-4		20-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.5-6	0.5-4	0.5-2.5	0.5-2.5	0.5-6	0.5-4	0.5-2.5	0.5-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-2.5	—	—	—	0.5-2.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)				-40(-40)~105(221)			
Stripping length		mm				8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Screw/Rated torque		~N.m(lb.in)(kgf.cm)				M3/0.6(6.0)(5.1)			
Accessories									
Ferrule		/				/			
Cross & Slotted Screwdriver specification (Thickness x Width)		mm				0.6x3.5			
Screw		Cross & Slotted screw				Cross & Slotted screw			
Bridge (2-10P)						DFA4			
End cover						D-DC2.5-TW			
Partition plate		/				/			
Marker						ZB6			
Marker support		/				/			
Terminal strip marker support						DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp						E-PC 1100A / E-WS N			

Screw connection technology 1

Feed-through and ground terminal blocks



DC4-QU

(Cross & Slotted screw)
CE ENEC RoHS REACH



DC4-QU-PE

(Cross & Slotted screw)
CE ENEC RoHS REACH

Order NO.		11020000188				11020000189			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.1/54.4/49.2(56.7)				6.1/54.4/49.2(56.7)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	500		300		/		/	
Rated current	A	32		30		/		/	
Rated cross section	mm²/AWG	0.5-4		22-10		0.5-4		22-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.5-6	0.5-4	0.5-4	0.5-4	0.5-6	0.5-4	0.5-4	0.5-4
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-1.5	—	—	—	0.5-1.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		°C (°F)		-40(-40)~105(221)		-40(-40)~105(221)			
Stripping length		mm		8-9		8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Screw/Rated torque		-/N.m(lb.in)(kgf.cm)		M3/0.6(6.0)(5.1)		M3/0.6(6.0)(5.1)			
Accessories									
Ferrule		/				/			
Cross & Slotted Screwdriver specification (Thickness x Width) mm		0.6x3.5				0.6x3.5			
Screw		Cross & Slotted screw				Cross & Slotted screw			
Bridge (2-10P)		DFA4				/			
End cover		D-DC4-QU				D-DC4-QU			
Partition plate		/				/			
Marker		ZB6				ZB6			
Marker support		/				/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Screw connection technology 1

Feed-through and ground terminal blocks

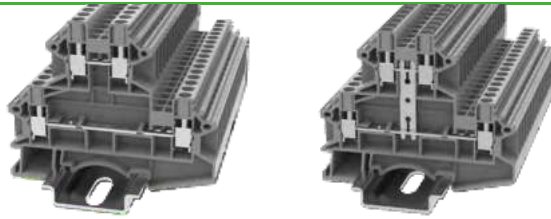

DCKKB4



DCKKB4-PV

CE ENE RoHS REACH

CE ENE RoHS REACH

Order NO.		11020000126				11020000127			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.1/76/63(70.5)				6.1/76/63(70.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Screw connection technology 1

Feed-through and ground terminal blocks




DCKKB4-PE

CE ENE RoHS REACH

Order NO.		11020000070			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.1/76/63(70.5)			
Electrical Data		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	/		/	
Rated current	A	/		/	
Rated cross section	mm² /AWG	0.5-4		22-10	
Connection capacity		Solid	Stranded	Female (with and without plastic sleeve)	
1 conductor	mm²	0.5-6	0.5-4	0.5-4	0.5-4
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-1.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)			
Stripping length	mm	8-9			
Color		Yellow green mixed color			
Screw/Rated torque	-/N.m(lb.in)(kgf.cm)	M3/0.6(5.3)(6.1)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	0.6x3.5			
Screw		Slotted screw			
Bridge (2-10P)		DFA4			
End cover		D-DCKKB2.5			
Partition plate		/			
Marker		ZB6			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

Screw connection technology 1

Feed-through and ground terminal blocks

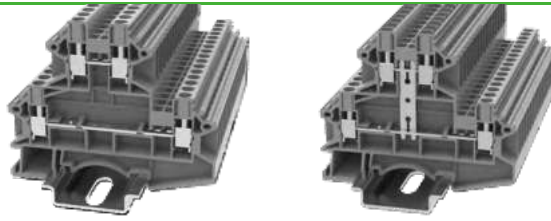

DCKKB4-01P-11-02A(H)
 (Cross & Slotted screw)
 CE ENE RoHS REACH

DCKKB4-PV-02A(H)
 (Cross & Slotted screw)
 CE ENE RoHS REACH

Order NO.	11020000191						11020000192					
Width/Length/Height(NS35/7.5&NS35/15)	mm		6.1/76/63(70.5)						6.1/76/63(70.5)			
Electrical Data			IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059			
Rated voltage	V		800		300		800		300			
Rated current	A		32		30		32		30			
Rated cross section	mm²/AWG		0.5-4		22-10		0.5-4		22-10			
Connection capacity			Solid	Stranded	Ferrule (with and without plastic sleeve)			Solid	Stranded	Ferrule (with and without plastic sleeve)		
1 conductor	mm²		0.5-6	0.5-4	0.5-4	0.5-4	0.5-6	0.5-4	0.5-4	0.5-4		
2 flexible conductors with a TWIN ferrule	mm²		—	—	—	0.5-1.5	—	—	—	0.5-1.5		
General Information												
Insulation material/Flammability rating (according to UL 94)			PA/V0						PA/V0			
Operation temperatures	℃ (°F)		-40(-40)~105(221)						-40(-40)~105(221)			
Stripping length	mm		8-9						8-9			
Color			Grey, Red, Blue (please contact sales for other color requirements)						Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque	~N.m(lb.in)(kgf.cm)		M3/0.6(5.3)(6.1)						M3/0.6(5.3)(6.1)			
Accessories												
Ferrule			/						/			
Cross & Slotted Screwdriver specification (Thickness x Width)	mm		0.6x3.5						0.6x3.5			
Screw			Cross & Slotted screw						Cross & Slotted screw			
Bridge (2-10P)			DFA4						DFA4			
End cover			D-DCKKB2.5						D-DCKKB2.5			
Partition plate			/						/			
Marker			ZB6						ZB6			
Marker support			/						/			
Terminal strip marker support			DLM2 / KLM3-20x8 / KLM3-44x8						DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp			E-PC 1100A / E-WS N						E-PC 1100A / E-WS N			


Screw connection technology 1

Feed-through and ground terminal blocks




DCKKB4-PE-02A(H)
 (Cross & Slotted screw)
 CE ENE RoHS REACH

Order NO.	11020000193			
Width/Length/Height(NS35/7.5&NS35/15) mm	6.1/76/63(70.5)			
Electrical Data	IEC IEC60947-7-2		UL UL1059	
Rated voltage				

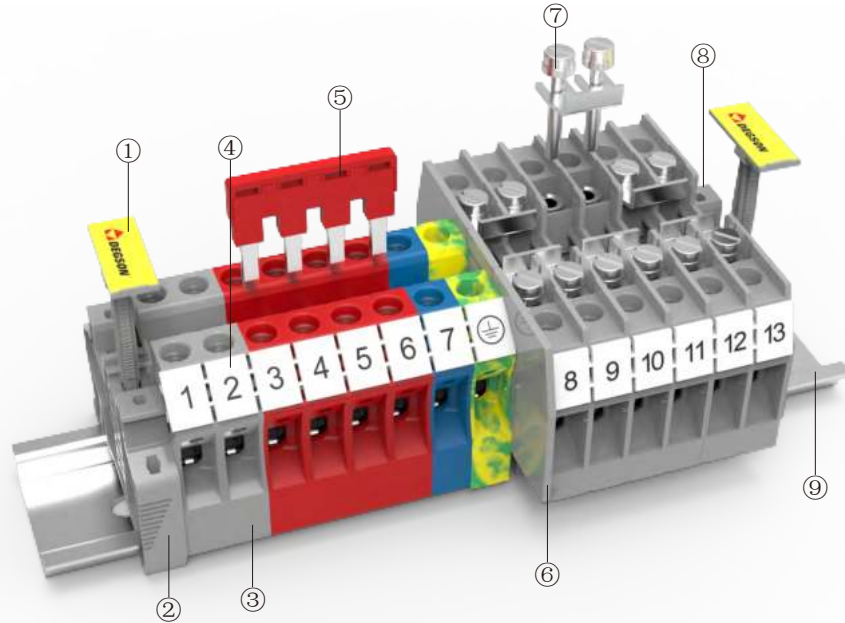


Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End stopper	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	DC6-01P-11-00A(H)	Steel cage locking type 6mm ² DIN Rail terminal blocks
④ Marker	ZB8-10P-19-00A(H)	Marker is used for the side of DC6 series
⑤ Plug-in bridge	DFA6-04P-11-00A(H)	04P bridge, use for DC6 series
⑥ End cover	D-DCTK6-01P-11-00A(H)	End cover is used for DCTK6
⑦ Fixed bridge	FBR16-RTK/S-02P-00A(H)	02P bridge, use for DCTK6
⑧ End stopper	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑨ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

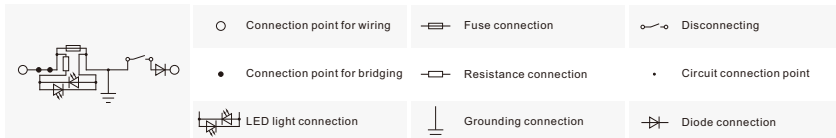

Screw connection technology 1

Feed-through and ground terminal blocks

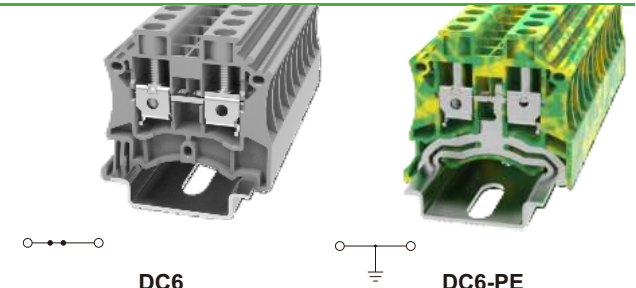


DC6

DC6-PE

UL CE ENE RoHS REACH

UL CE ENE RoHS REACH

Order NO.	11020000047	11020000196
Width/Length/Height(NS35/7.5&NS35/15) mm	8/44.95/43.5(51)	8/44.95/43.5(51)
Electrical Data	IEC IEC60947-7-1	UL UL1059
Rated voltage V	1000	600
Rated current A	41	50
Rated cross section mm ² /AWG	0.5-6	22-8
Connection capacity	Solid Stranded Ferrule (with and without plastic sleeve)	Solid Stranded Ferrule (with and without plastic sleeve)
1 conductor mm ²	0.5-6	0.5-6
2 flexible conductors with a TWIN ferrule mm ²	—	—
General Information		
Insulation material/Flammability rating (according to UL 94)	PA/V0	PA/V0
Operation temperatures °C (°F)	-40(-40)~105(221)	-40(-40)~105(221)
Stripping length mm	10-11	10-11
Color	Grey, Red, Blue (please contact sales for other color requirements)	Yellow green mixed color
Screw/Rated torque -/N.m(lb.in)(kgf.cm)	M4/1.2(10.6)(12.24)	M4/1.2(10.6)(12.24)
Accessories		
Ferrule	/	/
Slotted screwdriver size (Blade thickness x Width) mm	1x4	1x4
Screw	Slotted screw	Slotted screw
Bridge (2-10P)	DFA6	/
End cover	D-DC6	D-DC6
Partition plate	/	/
Marker	ZB8	ZB8
Marker support	/	/
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp	E-PC 1100A / E-WS N	E-PC 1100A / E-WS N

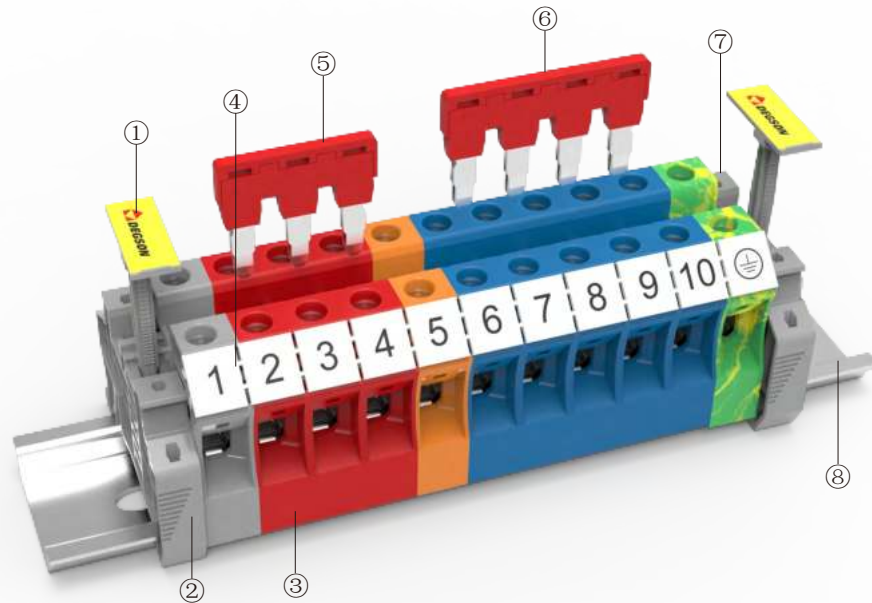


Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	DC6-01P-11-00A(H)	Steel cage locking type 10mm ² DIN Rail terminal blocks
④ Marker	ZB10-10P-19-00A(H)	Marker is used for the side of DC10 series
⑤ Plug-in bridge	DFA10-03P-11-00A(H)	03P bridge, use for DC10
⑥ Plug-in bridge	DFA10-04P-11-00A(H)	04P bridge, use for DC10
⑦ End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑧ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring	Fuse connection	Disconnecting
	● Connection point for bridging	Resistance connection	• Circuit connection point
	LED light connection	Grounding connection	Diode connection

Screw connection technology 1

Feed-through and ground terminal blocks

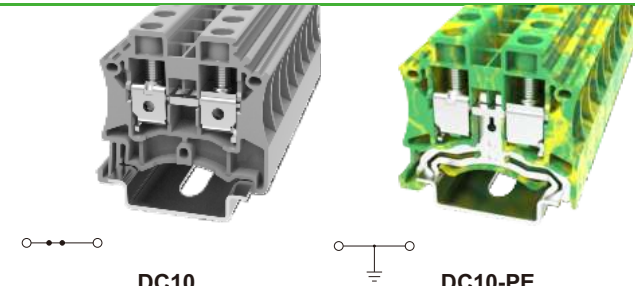


DC10	DC10-PE
UL US CE ENE RoHS REACH	UL US CE ENE RoHS REACH

Order NO.	11020000001	11020000011
Width/Length/Height(NS35/7.5&NS35/15) mm	8/44.95/43.5(51)	8/44.95/43.5(51)
Electrical Data	IEC IEC60947-7-1	UL UL1059
Rated voltage V	1000	600
Rated current A	57	65
Rated cross section mm ² /AWG	0.5-10	20-6
Connection capacity	Solid Stranded Ferrule (with and without plastic sleeve)	Solid Stranded Ferrule (with and without plastic sleeve)
1 conductor mm ²	0.5-10	0.5-10
2 flexible conductors with a TWIN ferrule mm ²	—	—
General Information		
Insulation material/Flammability rating (according to UL 94)	PA/V0	PA/V0
Operation temperatures °C (°F)	-40(-40)~105(221)	-40(-40)~105(221)
Stripping length mm	10-12	10-12
Color	Grey, Red, Blue (please contact sales for other color requirements)	Yellow green mixed color
Screw/Rated torque -/N.m(lb.in)(kgf.cm)	M4/1.54(14)(15.71)	M4/1.54(14)(15.71)
Accessories		
Ferrule	/	/
Slotted screwdriver size (Blade thickness x Width) mm	1x4	1x4
Screw	Slotted screw	Slotted screw
Bridge (2-10P)	DFA10	/
End cover	D-DC6	D-DC6
Partition plate	/	/
Marker	ZB10	ZB10
Marker support	/	/
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp	E-PC 1100A / E-WS N	E-PC 1100A / E-WS N

Screw connection technology 1

Feed-through and ground terminal blocks




DC10-300A(H)
(Cross & Slotted screw)
CE ENEC RoHS REACH

Order NO.		11020000182			
Width/Length/Height(NS35/7.5&NS35/15) mm		10.2/42.5/47.25(54.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	800		600	
Rated current	A	57		30	
Rated cross section	mm ² /AWG	0.5-10		20-6	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.5-10	0.5-10	0.5-10	0.5-10
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-4
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)			
Stripping length mm		10-12			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque ~N.m(lb.in)(kgf.cm)		M4/1.2(10.5)(12.24)			
Accessories					
Ferrule		/			
Cross & Slotted Screwdriver specification (Thickness x Width) mm		1x4			
Screw		Cross & Slotted screw			
Bridge (2-10P)		EB2-10 / EB3-10 / EB10-10			
End cover		D-PC2.5			
Partition plate		/			
Marker		ZB10			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			


Screw connection technology 1

Feed-through and ground terminal blocks



DC10-TW

CE ENEC RoHS REACH



DC10-TW-PE

CE ENEC RoHS REACH

Order NO.		11020000206				11020000207			
Width/Length/Height(NS35/7.5&NS35/15) mm		10.2/58.7/55.5(63)				10.2/58.7/55.5(63)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	1000		600		/		/	
Rated current	A	57		65		/		/	
Rated cross section	mm²/AWG	1.5-16		16-6		1.5-16		16-6	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.5-16	0.5-10	0.5-10	0.5-10	0.5-16	0.5-10	0.5-10	0.5-10
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-4	—	—	—	0.5-4
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		11-12				11-12			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color			
Screw/Rated torque ~N.m(lb.in)(kgf.cm)		M4/1.54(14.0)(15.71)				M4/1.54(14.0)(15.71)			
Accessories									
Ferrule		/				/			
Cross & Slotted Screwdriver specification (Thickness x Width) mm		1x4				1x4			
Screw		Cross & Slotted screw				Cross & Slotted screw			
Bridge (2-10P) 		DFA10				DFA10			
End cover 		D-DC10-TW				D-DC10-TW			
Partition plate		/				/			
Marker 		ZB10				ZB10			
Marker support		/				/			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Screw connection technology 1

Feed-through and ground terminal blocks



DCKKB10

CE ENEC RoHS REACH

Order NO.		11020000183			
Width/Length/Height(NS35/7.5&NS35/15) mm		10/83.9/72.5(80)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	500		300	
Rated current	A	57		65	
Rated cross section	mm ² /AWG	0.5-10		20-6	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.5-10	0.5-10	0.5-10	0.5-10
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-4
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)			
Stripping length mm		10-11			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque ~/N.m(lb.in)(kgf.cm)		M4/1.54(14)(15.71)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width) mm		1x4			
Screw		Slotted screw			
Bridge (2-10P) 		DFA10			
End cover		/			
Partition plate		/			
Marker 		ZB10			
Marker support		/			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N			

Screw connection technology 1

Feed-through and ground terminal blocks



DCKKB10-PV


CE ENEC RoHS REACH

Order NO.		11020000184			
Width/Length/Height(NS35/7.5&NS35/15) mm		10/83.9/72.5(80)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	500		300	
Rated current	A	57		65	
Rated cross section	mm ² /AWG	0.5-10		20-6	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.5-10	0.5-10	0.5-10	0.5-10
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-4
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)			
Stripping length	mm	10-11			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque	-/N.m(lb.in)(kgf.cm)	M4/1.54(14)(15.71)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	1x4			
Screw		Slotted screw			
Bridge (2-10P)		DFA10			
End cover		/			
Partition plate		/			
Marker		ZB10			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			




Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	DC16-01P-11-00A(H)	Steel cage locking type 16mm ² DIN Rail terminal blocks
④ Marker	ZT12-10P-19-00A(H)	Marker is used for the side of DC16 series
⑤ Plug-in bridge	DFA16-02P-11-00A(H)	02P bridge, use for DC16
⑥ Plug-in bridge	DFA16-03P-11-00A(H)	03P bridge, use for DC16
⑦ End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑧ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

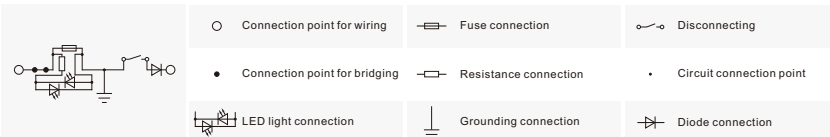

Screw connection technology 1

Feed-through and ground terminal blocks

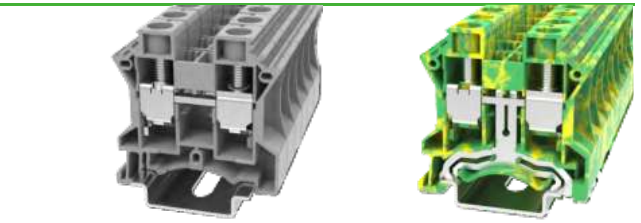

DC16


UL CE ENE RoHS REACH



DC16-PE

UL CE ENE RoHS REACH

Order NO.	11020000012	11020000017
Width/Length/Height(NS35/7.5&NS35/15) mm	12/49/50.9(58.4)	12/49/50.9(58.4)
Electrical Data	IEC IEC60947-7-1	UL UL1059
Rated voltage V	1000	600
Rated current A	76	100
Rated cross section mm ² /AWG	1.5-25	14-3
Connection capacity	Solid Stranded Ferrule (with and without plastic sleeve)	Solid Stranded Ferrule (with and without plastic sleeve)
1 conductor mm ²	1.5-25 1.5-25 1.5-16 1.5-16	1.5-25 1.5-25 1.5-16 1.5-16
2 flexible conductors with a TWIN ferrule mm ²	— — — 0.75-6	— — — 0.75-6
General Information		
Insulation material/Flammability rating (according to UL 94)	PA/V0	PA/V0
Operation temperatures °C (°F)	-40(-40)~105(221)	-40(-40)~105(221)
Stripping length mm	12	12
Color	Grey, Red, Blue (please contact sales for other color requirements)	Yellow green mixed color
Screw/Rated torque -/N.m(lb.in)(kgf.cm)	M5/2.5(27)(25)	M5/2.5(27)(25)
Accessories		
Ferrule	/	/
Slotted screwdriver size (Blade thickness x Width) mm	1x6.5	1x6.5
Screw	Slotted screw	Slotted screw
Plug-in bridge (2-3P)	DFA16	/
End cover	D-DC16	D-DC16
Partition plate	/	/
Marker	ZT12	ZT12
Marker support	/	/
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp	E-PC 1100A / E-WS N	E-PC 1100A / E-WS N

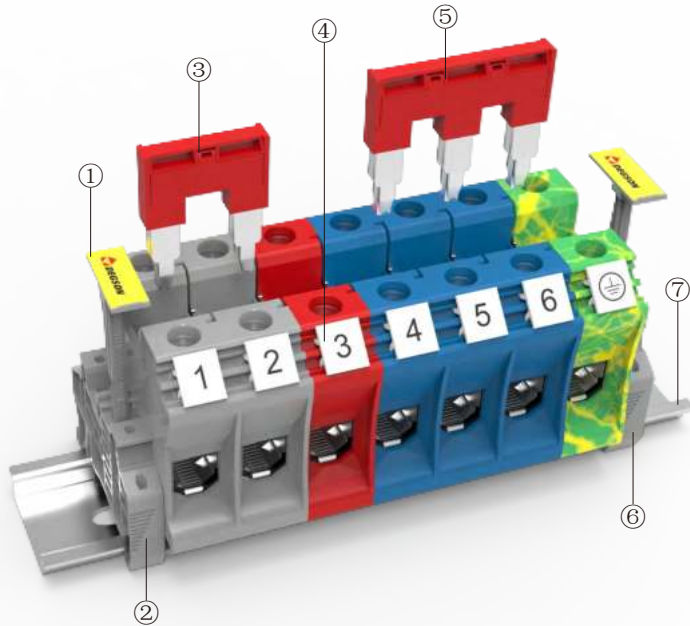


Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Plug-in bridge	DFA35-02P-11-00A(H)	02P bridge, use for DC35
④ Marker	ZT12-10P-19-00A(H)	Marker is used for the side of DC35 series
⑤ Plug-in bridge	DFA35-03P-11-00A(H)	03P bridge, use for DC35
⑥ End clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑦ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		Fuse connection		Disconnecting
	● Connection point for bridging		Resistance connection	•	Circuit connection point
	LED light connection		Grounding connection		Diode connection

Screw connection technology 1

Feed-through and ground terminal blocks

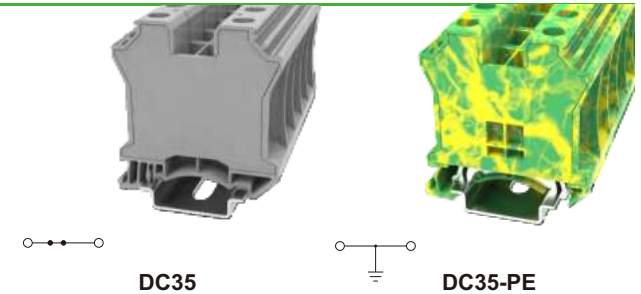

DC35

DC35-PE

Order NO.		11020000029				11020000034													
Width/Length/Height(NS35/7.5&NS35/15)		mm		16/55.4/61.3(68.8)				16/55.4/61.3(68.8)											
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059											
Rated voltage		V		1000		600		/		/									
Rated current		A		125		150		/		/									
Rated cross section		mm²/AWG		1.5-50		14-1/0		1.5-50		14-1/0									
Connection capacity		Solid		Stranded		Ferrule (with and without plastic sleeve)		Solid		Stranded		Ferrule (with and without plastic sleeve)							
1 conductor		mm²		2.5-50		2.5-50		1.5-35		1.5-35		2.5-50		2.5-50		1.5-35		1.5-35	
2 flexible conductors with a TWIN ferrule		mm²		—		—		—		1.5-10		—		—		—		1.5-10	
General Information																			
Insulation material/Flammability rating (according to UL 94)				PA/V0				PA/V0											
Operation temperatures				°C (°F)				-40(-40)~105(221)				-40(-40)~105(221)							
Stripping length				mm				14-16				14-16							
Color				Grey, Red, Blue (please contact sales for other color requirements)				Yellow green mixed color											
Screw/Rated torque				-/N.m(lb.in)(kgf.cm)				M6/3.5(31)(35)				M6/3.5(31)(35)							
Accessories																			
Ferrule				/				/											
Slotted screwdriver size (Blade thickness x Width)				mm				1x6.5				1x6.5							
Screw				Slotted screw				Slotted screw											
Plug-in bridge (2-3P)								DFA35				/							
End cover				/				/											
Partition plate				/				/											
Marker								ZT12				ZT12							
Marker support				/				/											
Terminal strip marker support								DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8							
End clamp								E-PC 1100A / E-WS N				E-PC 1100A / E-WS N							

Screw connection technology 1

Feed-through and ground terminal blocks



DC50

CE ENE RoHS REACH



DC50-PE

CE ENE RoHS REACH

Order NO.		11020000216				11020000218			
Width/Length/Height(NS35/7.5&NS35/15) mm		20/70.45/75.94(83.44)				20/70.45/75.94(83.44)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Screw connection technology 1

Feed-through and ground terminal blocks


DC50-01A(H)
(Hex socket screws)

CE ENE RoHS REACH



DC50-PE-01A(H)
(Hex socket screws)

CE ENE RoHS REACH

Order NO.		11020000233				11020000232			
Width/Length/Height(NS35/7.5&NS35/15) mm		20/70.45/75.94(83.44)				20/70.45/75.94(83.44)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	1000		600		/		/	
Rated current	A	150		125		/		/	
Rated cross section	mm²/AWG	16-50		6-1/0		16-50		6-1/0	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	16-50	16-50	16-50	16-50	16-50	16-50	16-50	16-50
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	10-16	—	—	—	10-16
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)		-40(-40)~105(221)		-40(-40)~105(221)			
Stripping length		mm		22-23		22-23			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow and green			
Screw/Rated torque		-/N.m(lb.in)(kgf.cm)		M6/2.5(22.2)(25)		M6/2.5(22.2)(25)			
Accessories									
Ferrule		/				/			
Screw(Allen key)		1.2x8				1.2x8			
Screw		Hex socket screws				Hex socket screws			
Bridge(2P,3P)		FBI2-20 / FBI3-20				/			
End cover		/				/			
Partition plate		/				/			
Marker		ZT12				ZT12			
Marker support		/				/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Screw connection technology 1

Feed-through and ground terminal blocks




DC95

CE ENE RoHS REACH

Order NO.		11020000213			
Width/Length/Height(NS35/7.5&NS35/15) mm		25/83/90.04(97.54)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	1000		600	
Rated current	A	232		230	
Rated cross section	mm ² /AWG	25-95		2-4/0	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	25-95	25-95	25-95	25-95
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	25-35
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (℉)	-40(-40)~105(221)			
Stripping length	mm	33-35			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque	~N.m(lb.in)(kgf.cm)	M8/25(221.5)(250)			
Accessories					
Ferrule		/			
Screw(Allen key)		/			
Screw		Hex socket screws			
Bridge (2-10P)		/			
End cover		/			
Partition plate		/			
Marker		ZT12			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

DC Fuse Terminal Blocks

- DC Fuse type terminal blocks, with screw connection technology, high-quality steel screw and cage ensure the stable & reliable connection
- Snap-on fuse box for easy fuse replacement
- Equipped with LED indicator for quick identification of fusing status
- Compatible with the marking system to clearly identify the working area

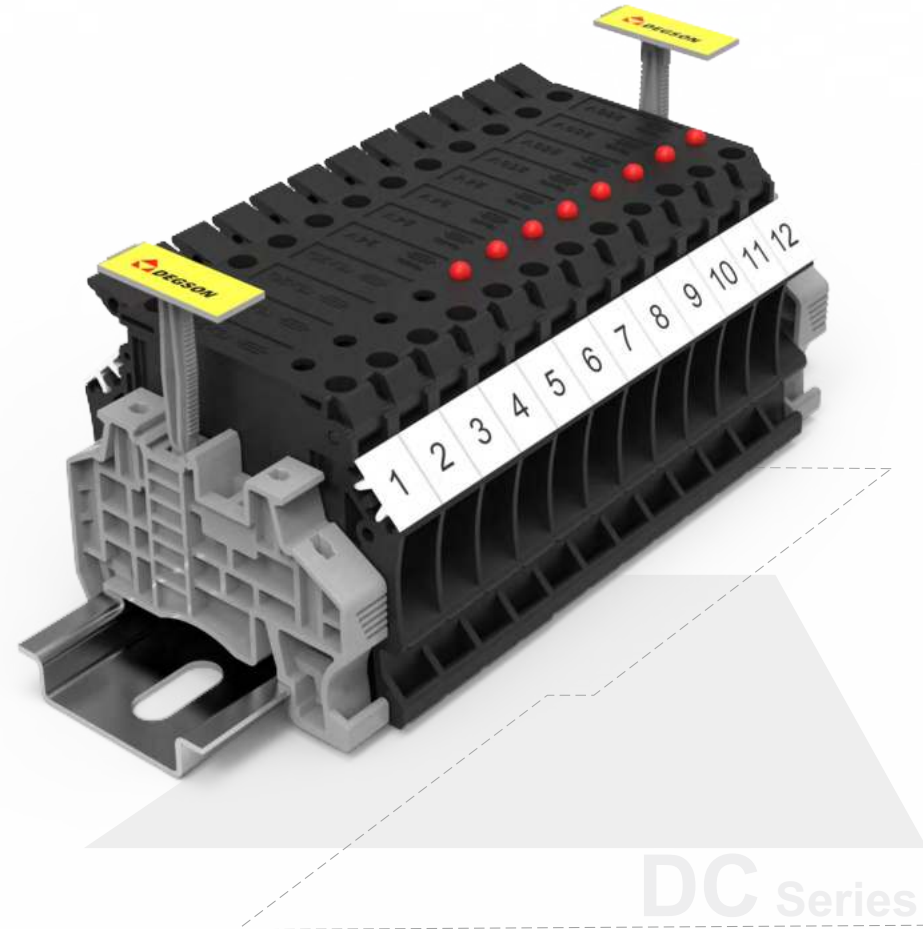

DC Series

Screw connection technology 1

Fuse terminal blocks(5X20)



DC4-HE



DC4-HE-LD24

CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11020000045				11020000120			
Width/Length/Height(NS35/7.5&NS35/15) mm		8/58/50(57.5)				8/58/50(57.5)			
Electrical Data		IEC IEC60947-7-3		UL UL1059		IEC IEC60947-7-3			
Rated voltage									

Screw connection technology 1

Fuse terminal blocks(5X20)




DC4-HE-LD250

CE ENEC RoHS REACH

Order NO.		11020000121			
Width/Length/Height(NS35/7.5&NS35/15)		mm8/58/50(57.5)			
Electrical Data		IEC IEC60947-7-3			
Rated voltage	V	250 (Led voltage range 110-250V)			
Rated current	A	6.3			
Rated cross section	mm² /AWG	0.5-6		20-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.5-6	0.5-4	0.5-4	0.5-4
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-1.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		°C (°F) -40(-40)~105(221)			
Stripping length		mm9			
Color		Black (please contact sales for other color requirements)			
Screw/Rated torque		-/N.m(lb.in)(kgf.cm) M3/0.5(4.5)(5.1)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm0.6x3.5			
Screw		Slotted screw			
Bridge(2,3,10P)		 EBC2-8 / EBC3-8 / EBC10-8			
End cover		 D-DC4-HE			
Partition plate		/			
Marker		 ZB8			
Marker support		/			
Terminal strip marker support		 DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		 E-PC 1100A / E-WS N			

DC Disconnect Terminal Blocks

- DC Knife disconnect terminal blocks, with screw connection technology, high-quality steel screw and cage ensure the stable & reliable connection
- The circuit can be disconnected, measured, controlled easily by operate the knife disconnecter
- Snap-on knife disconnecter to prevent accidental disconnection
- Universal breaking area to achieve different functions, can insert breaking plug, component plug, fuse plug

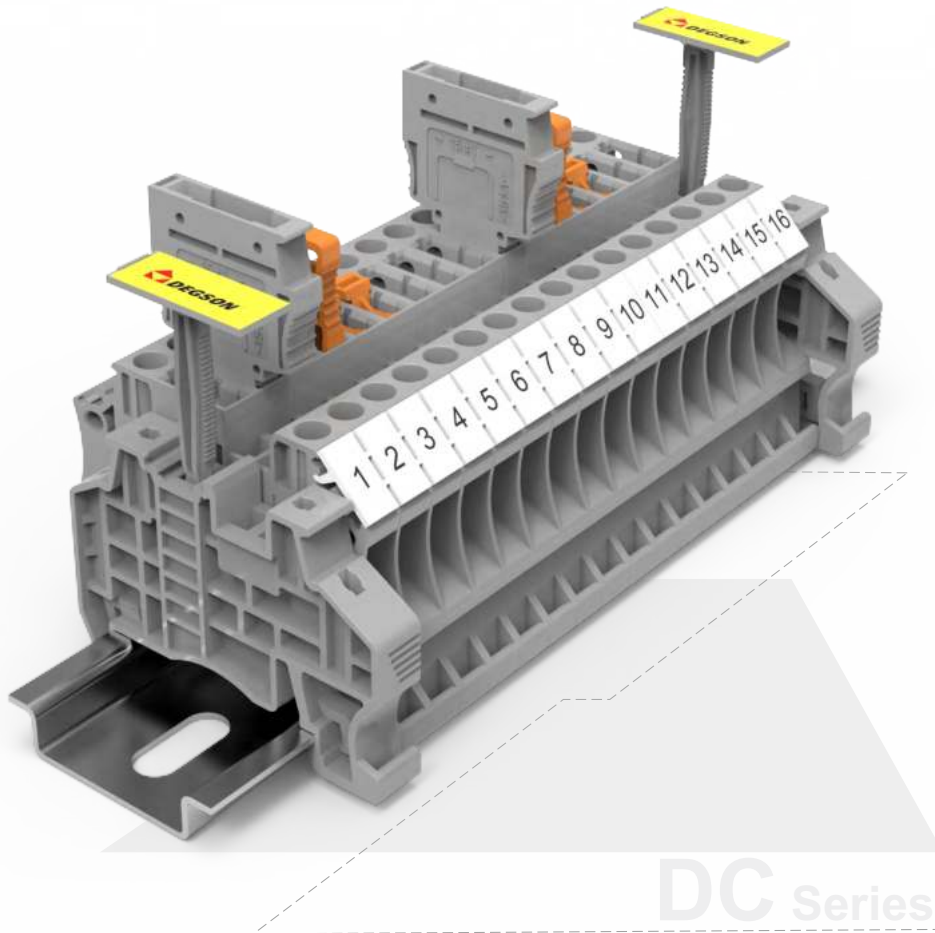

DC Series

Screw connection technology 1

Disconnect terminal blocks



DC4-MT



DC4-TG


CE ENEC RoHS REACH

CE ENEC RoHS REACH

Order NO.		11020000187				11020000186			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.1/56.8/41.5(49)				6.1/56.8/41.5(49)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	500		600		500		600	
Rated current	A	20		16		20		16	
Rated cross section	mm² /AWG	0.5-6		26-10		0.5-6		26-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.5-6	0.5-4	0.5-4	0.5-4	0.5-6	0.5-4	0.5-4	0.5-4
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-1.5	—	—	—	0.5-1.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		8-9				8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque -/N.m(lb.in)(kgf.cm)		M3/0.65(6.63)(5.76)				M3/0.65(6.63)(5.76)			
Accessories									
Matching accessories 		/				DS-DI / DS-CO / DS-FU5 / DS-FU5-LD24			
Slotted screwdriver size (Blade thickness x Width) mm		0.6x3.5				0.6x3.5			
Screw		Slotted screw				Slotted screw			
Bridge (2-10P) 		DFA4				DFA4			
End cover 		D-DC4-TG				D-DC4-TG			
Partition plate		/				/			
Marker 		ZB6				ZB6			
Marker support		/				/			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			


DC Test Disconnect Terminal Block

- DC Test disconnect terminal block, with screw connection technology, high-quality steel screw and cage ensure the stable & reliable connection
- The circuit can be disconnected, measured, controlled easily by operate the slide disconnector
- With bushing and bridges, it can be short-circuited and then open-circuited, which is convenient for protecting and measuring the secondary circuit
- Suitable for measurement and control engineering

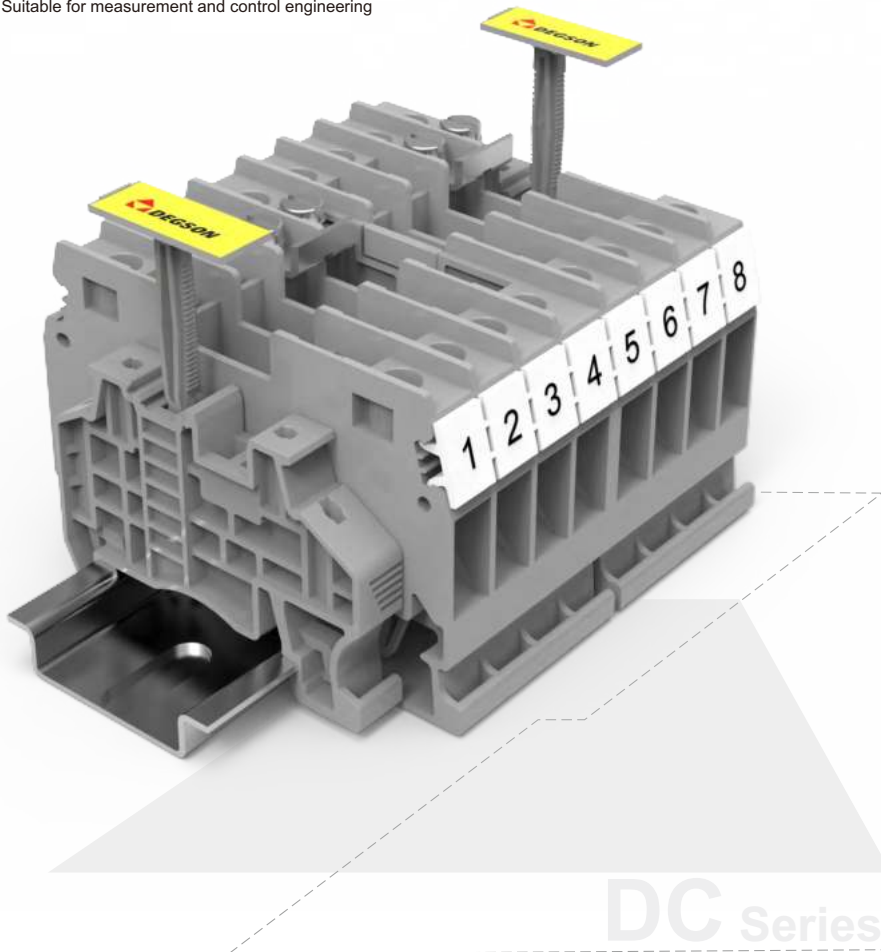

DC Series

Screw connection technology 1



Test disconnect terminal block



DCTK6-20A(H)

CE ENEC RoHS REACH


Order NO.		11020000234			
Width/Length/Height(NS35/7.5&NS35/15)		mm			
		8/69/46.55(54.05)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	630		300	
Rated current	A	41		45	
Rated cross section	mm ² /AWG	0.5-6		22-8	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.5-6	0.5-6	0.5-6	0.5-6
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-4
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)			
Stripping length	mm	10-11			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque	-/N.m(lb.in)(kgf.cm)	M4/1.2(10.6)(12.24)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	1x4			
Screw		Slotted screw			
Bridge (2-10P)		FBR12-RTK/S			
End cover		D-DCTK6			
Partition plate		/			
Marker		ZB8			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

PC Copper Alloy Pressure Clamp Structure





Feature

- Copper screw connection technology, reliable connection
- With fixed jumper, more flexible electrical connection test
- Copper alloy material, good corrosion resistance
- Complete product line can satisfy clients' different requirements
- Optional marker to avoid wire mis-inserting

PC Series

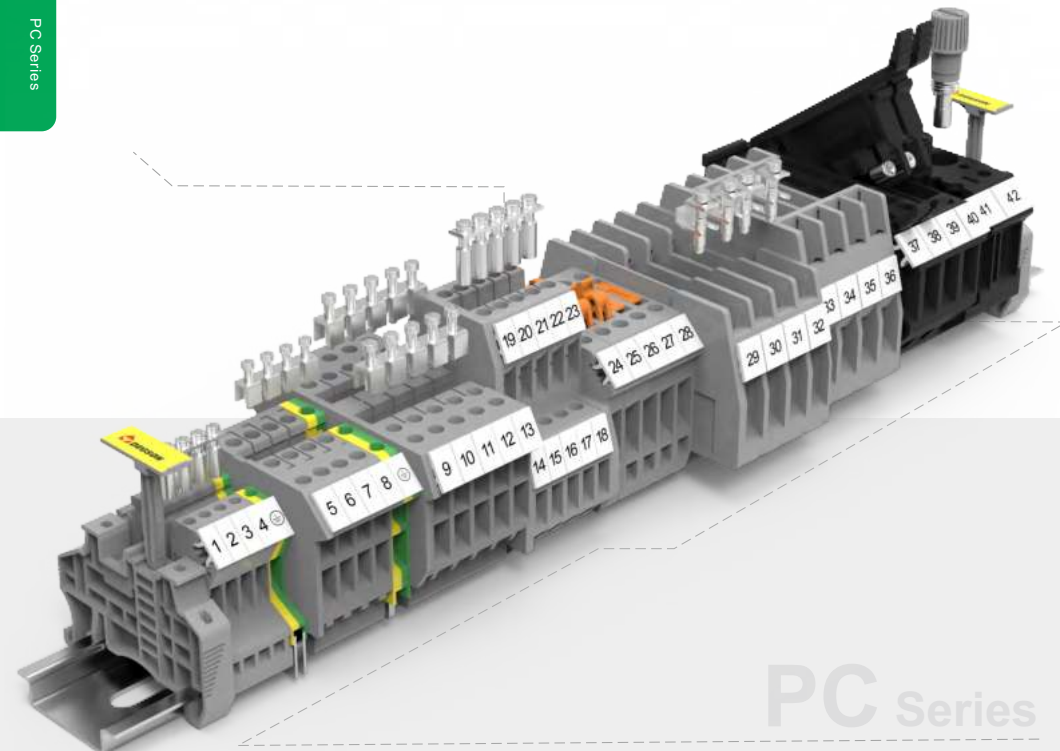

PC Series

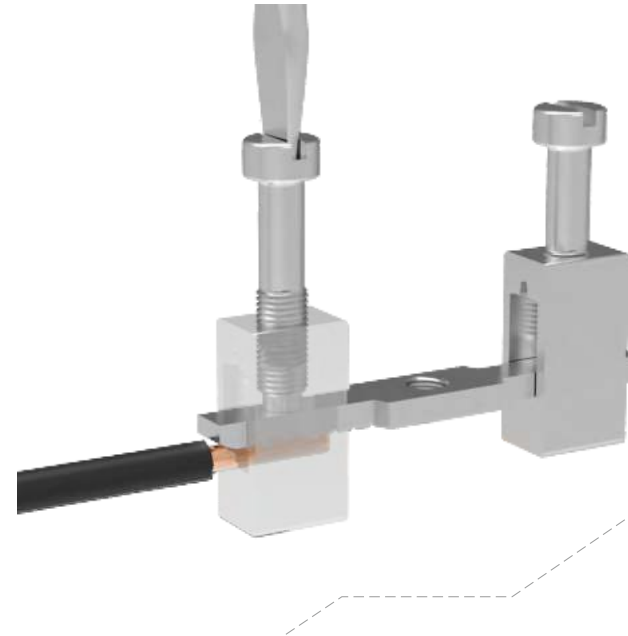


PC Series


PC copper screw connection terminal blocks (copper screw and copper block with clamping wire) have good corrosion resistance. High-precision copper alloy conductors provide the lowest temperature rise, ensuring reliable and safe connections. PA66 plastic parts can meet the working environment of -40 °C to 105°C, and all PC series of din rail products are in line with UL94 V0 flame retardant grade. Traditional screw terminal blocks: full product line provide different solutions for various industries.

PC Feed-through Terminal Blocks

- PC Feed-through terminal blocks, with screw connection technology, high-quality copper screw and cage ensure the stable & reliable connection
- Multi-deck type, space saving
- The fixed bridge can realize the potential distribution of 2-10 positions;By cutting off individual bifurcations, the side plug-in bridge can reach jumped connection
- Compatible with the marking system to clearly identify the working area

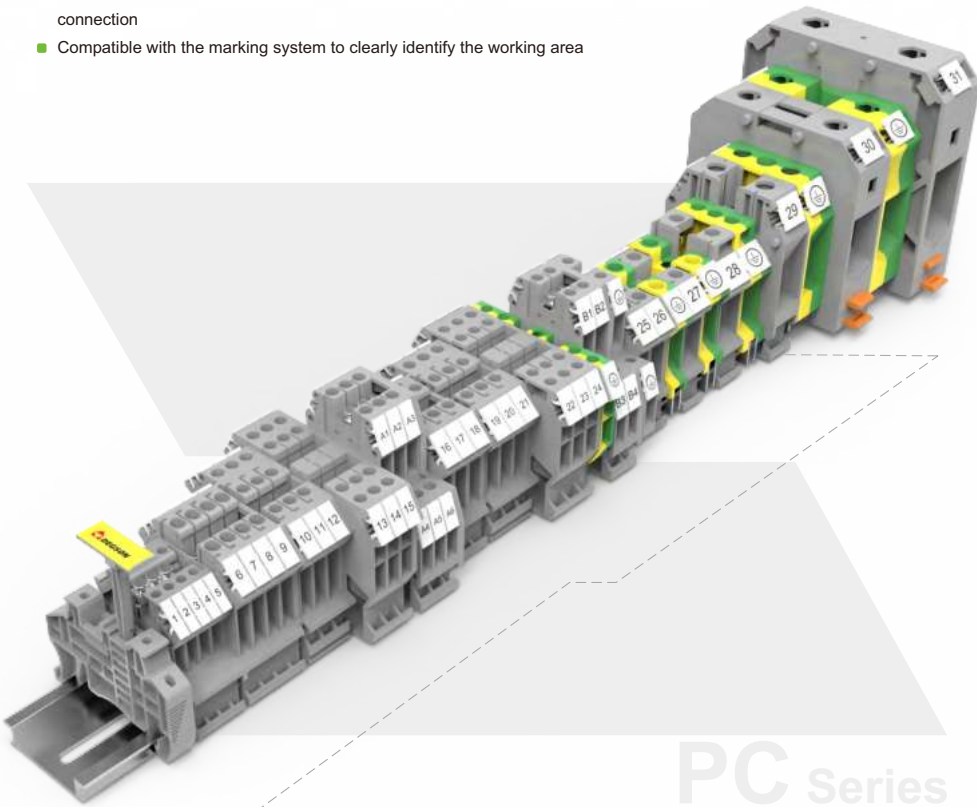

PC Series

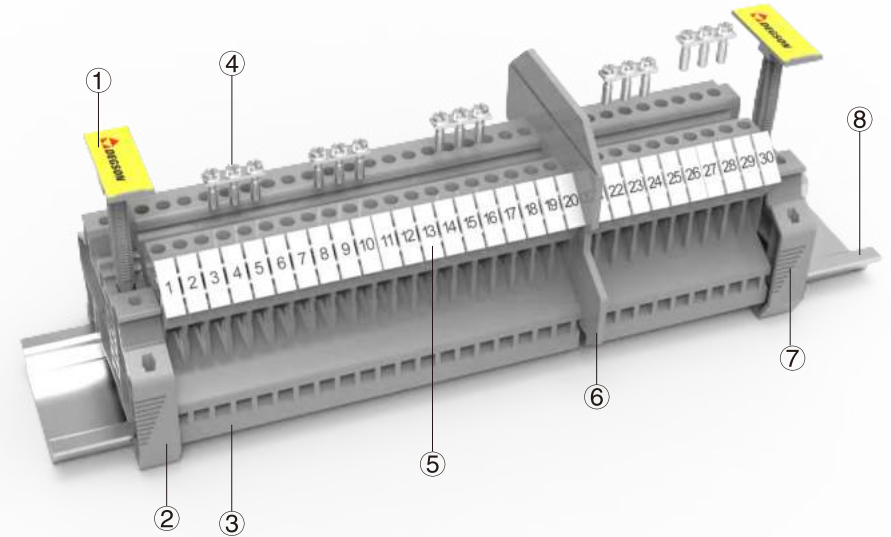

Description	Part No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Terminal blocks	PC1.5-01P-11-00A(H)	Brass screw type 1.5mm ² DIN Rail terminal blocks
④ Fixed bridge	FBRI3-4-00A(H)	03P bridge, use for PC1.5
⑤ Marker	ZB4-10P-19-00A(H)	Marker is used for the side of PC1.5
⑥ Partition plate	ATP-PC-01P-11-00A(H)	End cover is used for PC1.5
⑦ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑧ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		Fuse connection		Disconnecting
	• Connection point for bridging		Resistance connection	•	Circuit connection point
	LED light connection		Grounding connection		Diode connection

Screw connection technology 2


Feed-through terminal blocks



PC1.5

UL US CE ENEC RoHS REACH

Order NO.		11010000017			
Width/Length/Height(NS35/7.5&NS35/15) mm		4.2/42.5/42.05(49.55)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	500		600	
Rated current	A	17.5		10	
Rated cross section	mm ² /AWG	0.2-1.5		26-16	
Connection capacity		Solid	Stranded	Femule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-1.5	0.2-1.5	0.2-1.5	0.2-0.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)			
Stripping length	mm	6-7			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque	-/N.m(lb.in)(kgf.cm)	M2.5/0.2(1.8)(2.04)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	0.4x2.5			
Flexed bridge (2,3,5,10P)		FBR10-4			
Insertion bridge (2-10P)		/			
End cover		D-PC1.5			
Separating disk		/			
Partition plate		ATP-PC			
Marker		ZB4			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

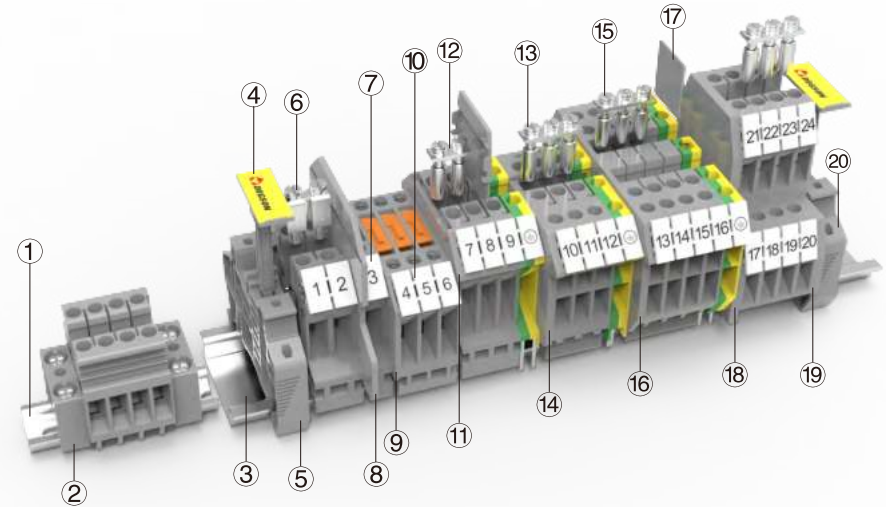

Description	Part No.	Remark
① DIN rail	NS15-0050-00A(H)	NS15 DIN rail
② End Clamp	E-PC-DIN15-01P-11-1000A(H)	Fixing products on NS15 DIN rail
③ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail
④ Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
⑤ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑥ Fixed bridge	FB12-6-00A(H)	02P bridge, use for PC2.5B
⑦ Marker	ZB6-10P-19-00A(H)	Marker is used for the side of PC2.5B
⑧ Partition plate	ATP-PC-01P-11-00A(H)	End cover is used for PC2.5 series
⑨ End cover	D-PCMT2.5-01P-11-00A(H)	End cover is used for PCMT2.5
⑩ Marker	ZB5-10P-19-00A(H)	Marker is used for the side of PC2.5 series
⑪ End cover	D-PC2.5-01P-11-00A(H)	End cover is used for PC2.5
⑫ Fixed bridge	FBRI2-5-00A(H)	02P bridge, use for PC2.5
⑬ Separating disk	TS-K-01P-11-00A(H)	The Separating disk is used for PC2.5, PCMB2.5
⑭ End cover	D-PC4-TW-01P-11-00A(H)	End cover is used for PC2.5-TW
⑮ Fixed bridge	FBRI3-5-00A(H)	03P bridge, use for PC2.5 series
⑯ End cover	D-PCDK2.5-01P-11-00A(H)	End cover is used for PCDK2.5
⑰ Separating disk	TS-KK3-01P-11-00A(H)	The Separating disk is used for PCDK2.5, PC2.5B, PCKK2.5
⑱ End cover	D-PCKK2.5-01P-11-00A(H)	End cover is used for PCKK2.5
⑲ Compensation plate	DP-PCKK2.5-01P-11-00A(H)	End cover is used for PCKK2.5 series
⑳ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		— Fuse connection		⊞ Disconnecting
	● Connection point for bridging		— Resistance connection	•	• Circuit connection point
	LED light connection		— Grounding connection		— Diode connection

Screw connection technology 2

Feed-through, multi-conductor, multi-level, and ground terminal blocks



PC2.5

PC2.5-PE

Order NO.		11010000031				11010000041			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/42.5/47.25(54.75)				5.2/42.5/47.25(54.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Screw connection technology 2

Feed-through, multi-conductor, multi-level, and ground terminal blocks




PC2.5B

Order NO.		11010000032			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.2/42.5/42.05(49.55)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	800		600	
Rated current	A	24		20	
Rated cross section	mm² /AWG	0.2-2.5		24-12	
Connection capacity		Solid	Stranded	Female (with and without plastic sleeve)	
1 conductor	mm²	0.2-2.5	0.2-2.5	0.2-2.5	0.2-1.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-0.75
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)			
Stripping length	mm	7			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque	~N.m(lb.in)(kgf.cm)	M3/0.5(4.5)(5.1)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	0.6x3.5			
Flexed bridge (2,3,5,7,8,10P)		FB110-6			
Insertion bridge (2-10P)		EB2-6 / EB3-6 / EB10-6			
End cover		D-PC1.5			
Separating disk		TS-KK3			
Partition plate		ATP-PC			
Marker	 	ZB6 / ZS6			
Marker support		/			
Terminal strip marker support	 	DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	 	E-PC 1100A / E-WS N			

Screw connection technology 2


Feed-through, multi-conductor, multi-level, and ground terminal blocks

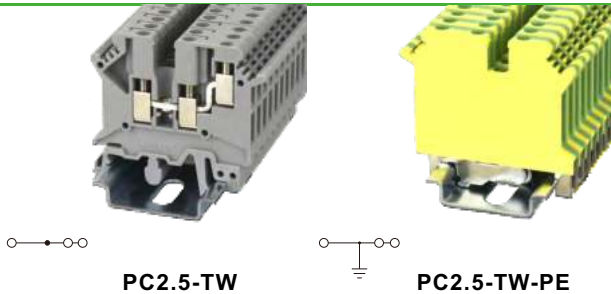

Order NO.		11010000033				11010000042			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/50.1/47.25(54.75)				5.2/50.1/47.25(54.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Screw connection technology 2


Feed-through, multi-conductor, multi-level, and ground terminal blocks

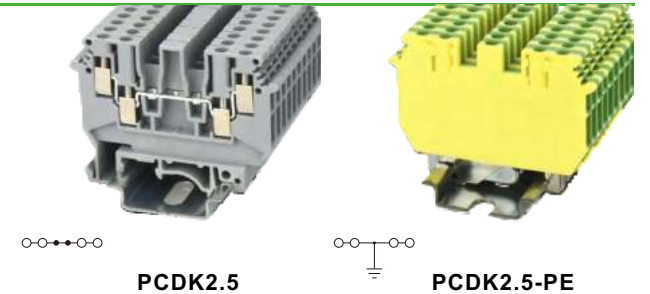

Order NO.		11010000115				11010000116			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/63.5/47.25(54.75)				5.2/63.5/47.25(54.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	500		300		/		/	
Rated current	A	24		20		/		/	
Rated cross section	mm ² /AWG	0.2-2.5		24-12		0.2-2.5		24-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-2.5	0.2-2.5	0.2-2.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-2.5	0.2-1.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-1	—	—	—	0.5-1
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)		-40(-40)~105(221)		-40(-40)~105(221)			
Stripping length		mm		7-8		7-8			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow and green			
Screw/Rated torque		-N.m(lb.in)(kgf.cm)		M3/0.5(4.5)(5.1)		M3/0.5(4.5)(5.1)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)		mm		0.6x3.5		0.6x3.5			
Flexed bridge (2,3,4,5,6,8,10P)				FBRI10-5		/			
Insertion bridge (2-10P)				EB2-5 / EB3-5 / EB10-5		EB2-5 / EB3-5 / EB10-5			
End cover				D-PCDK2.5		/			
Separating disk				TS-KK3		/			
Partition plate				/		/			
Marker				ZB5 / ZS5		ZB5 / ZS5			
Marker support				/		/			
Terminal strip marker support				DLM2 / KLM3-20x8 / KLM3-44x8		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp				E-PC 1100A / E-WS N		E-PC 1100A / E-WS N			


Screw connection technology 2

Feed-through, multi-conductor, multi-level, and ground terminal blocks

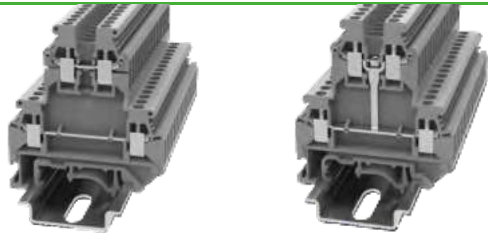


Order NO.		11010000123				11010000124			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/56/61.95(69.45)				5.2/56/61.95(69.45)			
Electrical Data		IEC IEC60947-7-1		UL UL 1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Accessories		
Ferrule	/	
Slotted screwdriver size (Blade thickness x Width) mm	0.6x3.5	
Flexed bridge (2,3,4,5,6,8,10P)	FBRI10-5	
Insertion bridge (2-10P)	EB2-5 / EB3-5 / EB10-5	
End cover	D-PCKK2.5	
Separating disk	TS-KK3	
Partition plate	/	
Compensation plate	DP-PCKK2.5	
Marker	ZB5 / ZS5	
Marker support	/	
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8	
End clamp	E-PC 1100A / E-WS N	

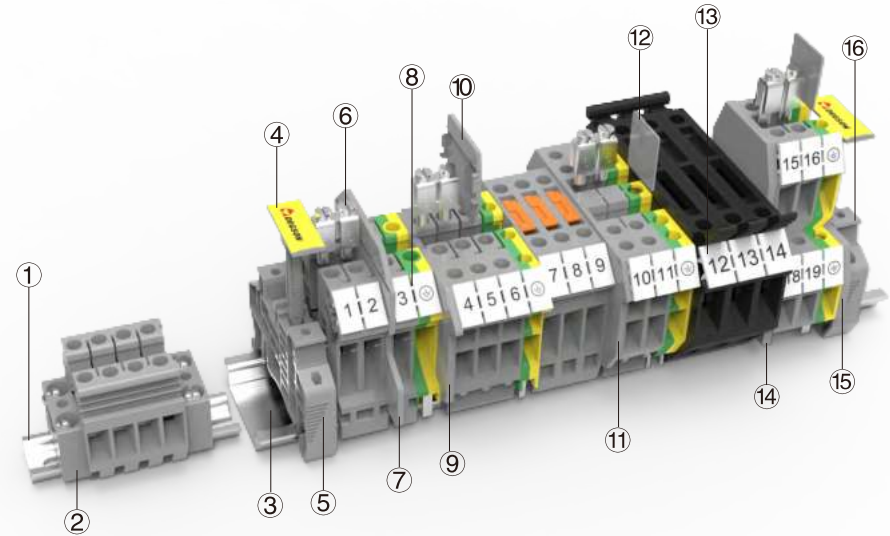

Description	No.	Remark
① DIN rail	NS15-0050-00A(H)	NS15 DIN rail
② End Clamp	E-PC-DIN15-01P-11-1000A(H)	Fixing products on NS15 DIN rail
③ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail
④ Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
⑤ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑥ Fixed bridge	FB12-6-00A(H)	02P bridge, use for PC4
⑦ Marker	ZB6-10P-19-00A(H)	Marker is used for the side of PC4 series
⑧ End cover	D-PC4-TW-01P-11-00A(H)	End cover is used for PC4-TW
⑨ Insertion bridge	EB3-6-11-00A(H)	03P bridge, use for PC4 series
⑩ Separating disk	TS-K-01P-11-00A(H)	The Separating disk is used for PC4, PCMB4
⑪ End cover	D-PCDK2.5-01P-11-00A(H)	End cover is used for PCDK4
⑫ Separating disk	TS-KK3-01P-11-00A(H)	The Separating disk is used for PCDK4, PCKK4
⑬ Marker	ZB8-10P-19-00A(H)	Marker is used for the side of PC4-HE
⑭ End cover	D-PCKK2.5-01P-11-00A(H)	End cover is used for PCKK4
⑮ Compensation plate	DP-PCKK2.5-01P-11-00A(H)	End cover is used for PCKK4 series
⑯ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail

Circuit diagram



○ Connection point for wiring

Fuse connection

Disconnecting

● Connection point for bridging

Resistance connection

● Circuit connection point


LED light connection

Grounding connection

Diode connection

Screw connection technology 2


Feed-through, multi-conductor, multi-level, and ground terminal blocks

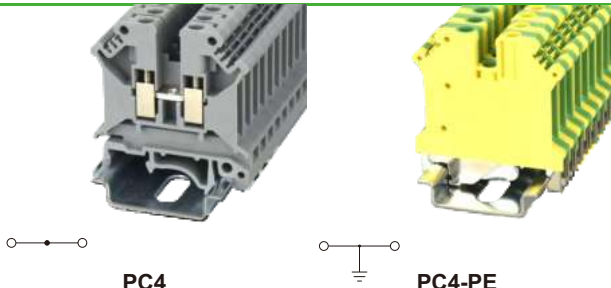

Order NO.		11010000068				11010000077			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.2/42.5/47.25(54.75)				6.2/42.5/47.25(54.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Screw connection technology 2


Feed-through, multi-conductor, multi-level, and ground terminal blocks

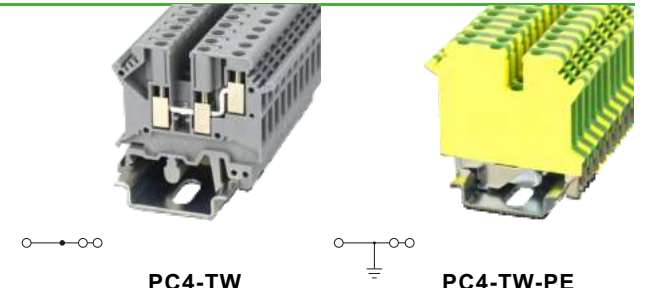

Order NO.		11010000070				11010000078			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.2/50.1/47.25(54.75)				6.2/50.1/47.25(54.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	500		300		/		/	
Rated current	A	32		30		/		/	
Rated cross section	mm²/AWG	0.2-4		24-12		0.2-4		24-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-4	0.2-4	0.2-4	0.2-2.5	0.2-4	0.2-4	0.2-4	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-1.5	—	—	—	0.5-1.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)		-40(-40)~105(221)		-40(-40)~105(221)			
Stripping length		mm		8-10		8-10			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow and green			
Screw/Rated torque		~N.m(lb.in)(kgf.cm)		M3/0.5(4.5)(5.1)		M3/0.5(4.5)(5.1)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		0.6x3.5				0.6x3.5			
Flexed bridge (2,3,5,7,8,10P) 		FBI10-6				/			
Insertion bridge (2-10P) 		EB2-6 / EB3-6 / EB10-6				EB2-6 / EB3-6 / EB10-6			
End cover 		D-PC4-TW				/			
Separating disk 		TS-K				/			
Partition plate 		/				/			
Marker 		ZB6 / ZS6				ZB6 / ZS6			
Marker support		/				/			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Screw connection technology 2

Feed-through, multi-conductor, multi-level, and ground terminal blocks

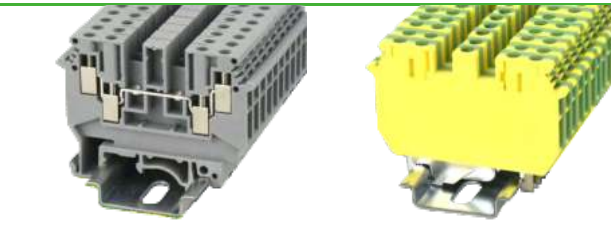

PCDK4

UL RoHS REACH




PCDK4-PE

UL RoHS REACH

Order NO.		11010000117				11010000120			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.2/63.5/47.25(54.75)				6.2/63.5/47.25(54.75)			
Electrical Data		IEC IEC60947-7-1		UL UL 1059		IEC IEC60947-7-2		UL UL 1059	
Rated voltage									

Screw connection technology 2

Feed-through, multi-conductor, multi-level, and ground terminal blocks

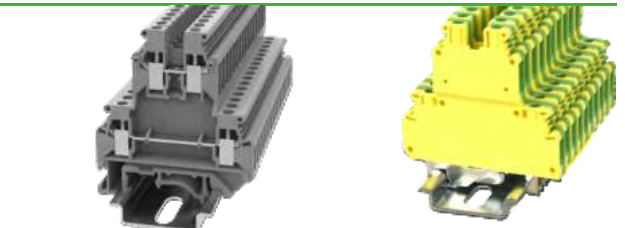

PCKK4


UL RoHS REACH




PCKK4-PE

UL RoHS REACH


Order NO.		11010000135				11010000139			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.2/56/61.95(69.45)				6.2/56/61.95(69.45)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	500		300		/		/	
Rated current	A	32		30		/		/	
Rated cross section	mm²/AWG	0.2-4		26-10		0.2-4		26-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-4	0.2-4	0.2-4	0.2-2.5	0.2-4	0.2-4	0.2-4	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-1.5	—	—	—	0.5-1.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		8				8			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow and green			
Screw/Rated torque ~N.m(lb.in)(kgf.cm)		M3/0.5(4.5)(5.1)				M3/0.5(4.5)(5.1)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		0.6x3.5				0.6x3.5			
Flexed bridge (2,3,5,7,8,10P) 		FBI10-6				/			
Insertion bridge (2-10P) 		EB2-6 / EB3-6 / EB10-6				EB2-5 / EB3-5 / EB10-5			
End cover 		D-PCKK2.5				/			
Separating disk 		TS-KK3				/			
Partition plate		/				/			
Compensation plate 		DP-PCKK2.5				DP-PCKK2.5			
Marker 		ZB6 / ZS6				ZB6 / ZS6			
Marker support		/				/			
Terminal strip marker support  		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp  		E-PC 1100A / E-WS N				E-WS / E-PC / E-MK / E-WS N			

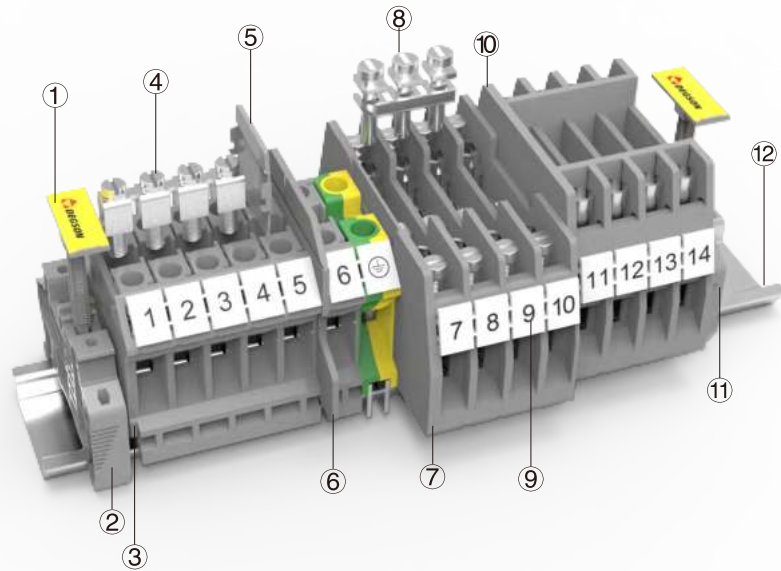


Description	No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ End cover	D-PC2.5-01P-11-00A(H)	End cover is used for PC6
④ Fixed bridge	FB14-8-00A(H)	04P bridge, use for PC6
⑤ Insertion bridge	ATP-PC-01P-11-00A(H)	03P bridge, use for PC6
⑥ Separating disk	TS-K-01P-11-00A(H)	The Separating disk is used for PC6
⑦ End cover	D-PCTK6-01P-11-00A(H)	End cover is used for PCTK6
⑧ Fixed bridge	FB3-RTK/S-00A(H)	03P bridge, use for PCTK6
⑨ Marker	ZB8-10P-19-00A(H)	Marker is used for the side of PC6 series
⑩ End cover	D-PCTK6-BEN-01P-11-00A(H)	End cover is used for PCTK6-BEN
⑪ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑫ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

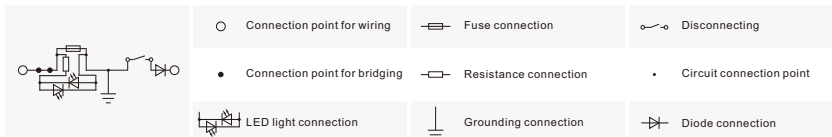Circuit diagram

Screw connection technology 2

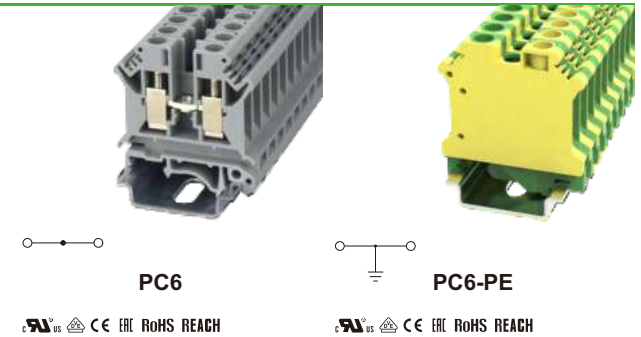Feed-through and ground terminal blocks

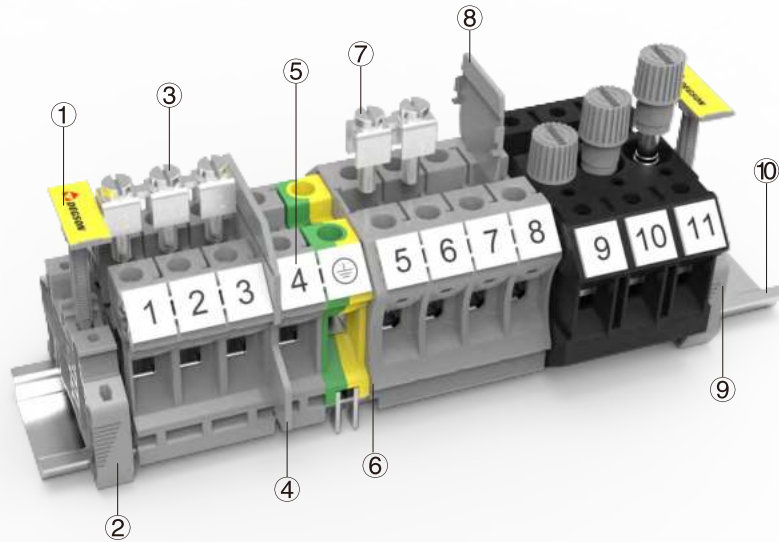


Order NO.		11010000092				11010000097			
Width/Length/Height(NS35/7.5&NS35/15) mm		8.2/42.5/47.25(54.75)				8.2/42.5/47.25(54.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	800		600		/		/	
Rated current	A	41		50		/		/	
Rated cross section	mm ² /AWG	0.2-6		24-8		0.2-6		24-8	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-6	0.2-6	0.2-6	0.2-2.5	0.2-6	0.2-6	0.2-6	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-4	—	—	—	0.5-4
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		°C (°F)		-40(-40)~105(221)		-40(-40)~105(221)			
Stripping length		mm		8-9		8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Yellow and green			
Screw/Rated torque		~N.m(lb.in)(kgf.cm)		M3/0.5(4.5)(5.1)		M3/0.5(4.5)(5.1)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		1x4				1x4			
Flexed bridge (2,3,4,5,6,8,10P) 		FB10-8				/			
Insertion bridge (2-10P) 		EB2-8 / EB3-8 / EB10-8				EB2-8 / EB3-8 / EB10-8			
End cover 		D-PC2.5				/			
Separating disk 		TS-K				/			
Partition plate 		ATP-PC				/			
Marker 		ZB8 / ZS8				ZB8 / ZS8			
Marker support		/				/			
Terminal strip marker support  		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp  		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			




Description	No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Fixed bridge	FB13-10-00A(H)	03P bridge, use for PC10
④ Partition plate	ATP-PC-01P-11-00A(H)	End cover is used for PC10
⑤ Marker	ZB10-10P-19-00A(H)	Marker is used for the side of PC10 series
⑥ End cover	D-PC10-01P-11-105A(H)	End cover is used for PC10-105A(H)
⑦ Fixed bridge	FB12-10-00A(H)	02P bridge, use for PC10-105A(H)
⑧ Separating disk	TS-K-01P-11-00A(H)	The Separating disk is used for PC10 series
⑨ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑩ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

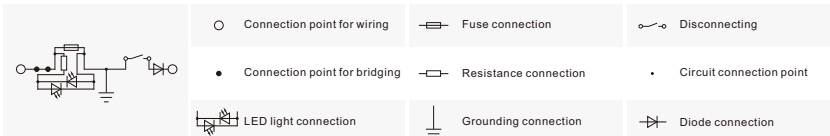


Screw connection technology 2

Feed-through and ground terminal blocks

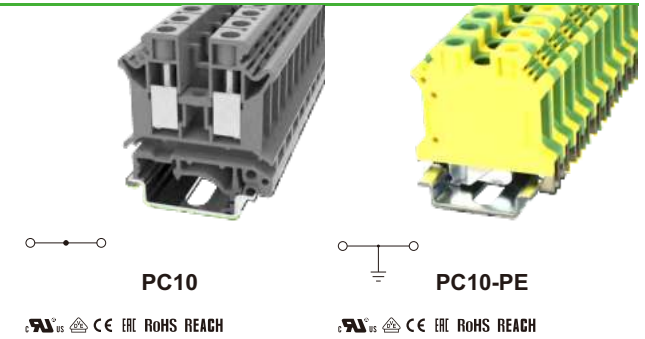


Order NO.		11010000001				11010000006			
Width/Length/Height(NS35/7.5&NS35/15) mm		10.2/42.5/47.25(54.75)				10.2/42.5/47.25(54.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

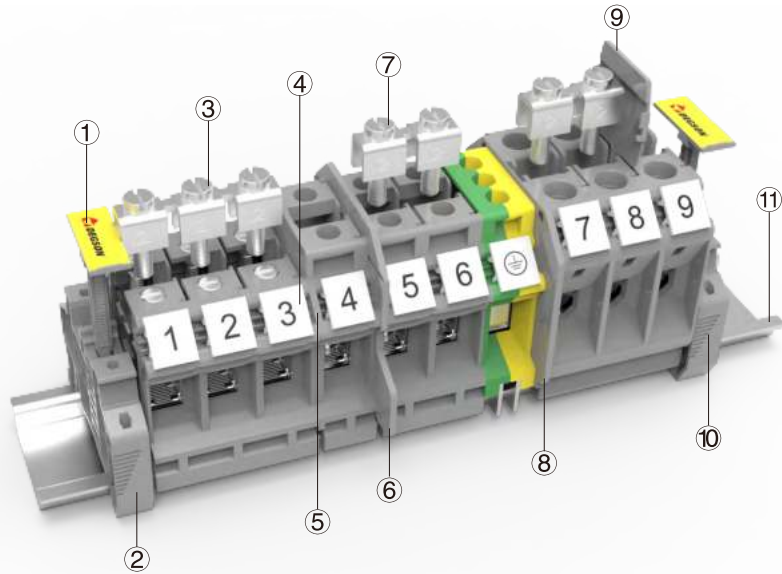


Description	No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ End cover	D-PCIK16-01P-11-00A(H)	End cover is used for PCIK16
④ Fixed bridge	FBI3-12-00A(H)	03P bridge, use for PCIK16
⑤ Marker	ZT12-10P-19-00A(H)	Marker is used for the side of PCIK16
⑥ End cover	D-PC16-01P-11-00A(H)	End cover is used for PC16
⑦ Partition plate	ATP-PC-01P-11-00A(H)	End cover is used for PC16
⑧ Fixed bridge	FBI2-12-00A(H)	02P bridge, use for PC16
⑨ End cover	D-PC16-01P-11-105A(H)	End cover is used for PC16-105A(H)
⑩ Separating disk	TS-K-01P-11-00A(H)	The Separating disk is used for PC16 series
⑪ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑫ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

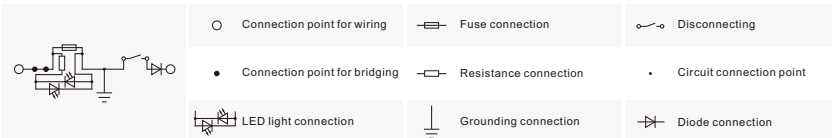

Screw connection technology 2

Feed-through and ground terminal blocks

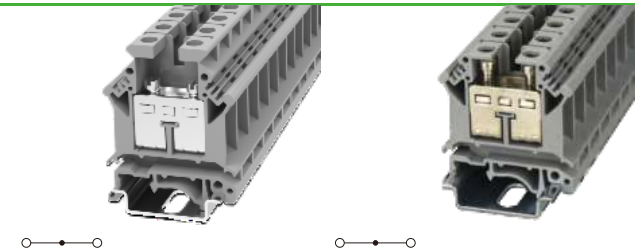

PC16

PCIK16

UL CE ENE RoHS REACH

UL CE ENE RoHS REACH

Order NO.		11010000020				11010000121			
Width/Length/Height(NS35/7.5&NS35/15) mm		12.2/42.5/54.05(61.55)				12.2/48.5/55.3(62.8)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	800		600		800		600	
Rated current	A	76		85		76		85	
Rated cross section	mm ² /AWG	0.2-16		12-4		0.2-16		12-4	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-16	0.2-16	0.2-16	0.2-16	1-16	1-16	1-16	1-16
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-6	—	—	—	0.75-10
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length mm		11-12				11-12			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque ~N.m(lb.in)(kgf.cm)		M4/1.2(10.5)(12.24)				M5/3(27)(30)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width) mm		1x4				1x4			
Flexed bridge (2,10P) 		FBI10-12				FBI10-12			
Insertion bridge (2-10P) 		EB10-12				EB10-12			
End cover 		D-PC16				D-PC16-105A(H)			
Separating disk 		TS-K				/			
Partition plate 		ATP-PC				/			
Marker 		ZT12 / ZS12				ZT12 / ZS12			
Marker support		/				/			
Terminal strip marker support 		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp 		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

Screw connection technology 2


Feed-through and ground terminal blocks



PC16-PE









UL US CE ENE RoHS REACH

Order NO.		11010000028			
Width/Length/Height(NS35/7.5&NS35/15) mm		12.2/42.5/54.05(61.55)			
Electrical Data		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	/		/	
Rated current	A	/		/	
Rated cross section	mm ² /AWG	0.2-16		12-4	
Connection capacity		Solid	Stranded	Femule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-16	0.2-16	0.2-16	0.2-16
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-6
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	°C (°F)	-40(-40)~105(221)			
Stripping length	mm	10-11			
Color		Yellow and green			
Screw/Rated torque	-/N.m(lb.in)(kgf.cm)	M4/1.2(10.5)(12.24)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	1x4			
Fixed bridge		/			
Insertion bridge (2-10P)		EB10-12			
End cover		/			
Separating disk		/			
Partition plate		/			
Marker		ZT12 / ZS12			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

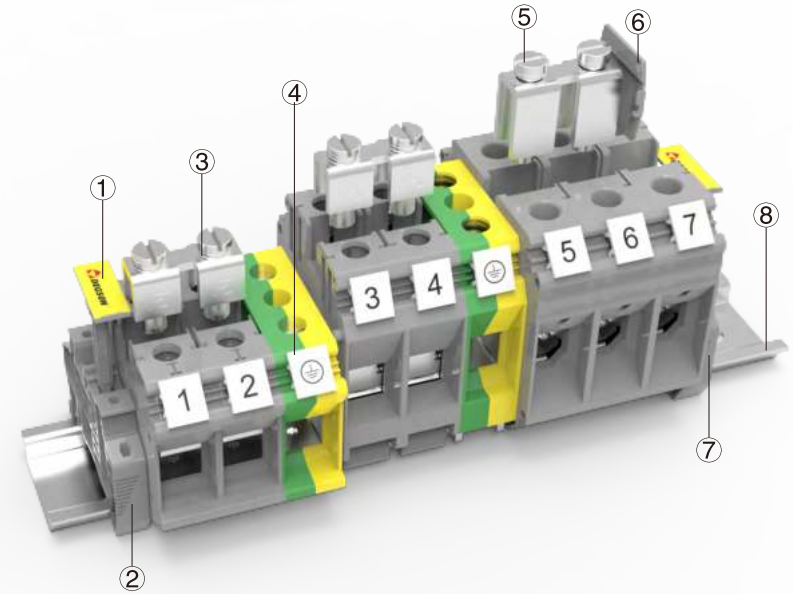


Description	No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Fixed bridge	FBI3-15-00A(H)	03P bridge, use for PCIK35
④ Marker	ZT12-10P-19-00A(H)	Marker is used for the side of PCIK35
⑤ Fixed bridge	FBI2-16-00A(H)	02P bridge, use for PC35-105A(H)
⑥ Separating disk	TS-K-01P-11-00A(H)	The Separating disk is used for PC35 series
⑦ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑧ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		— — Fuse connection		⏏ Disconnecting
	● Connection point for bridging		□ Resistance connection		• Circuit connection point
	LED light connection		⏏ Grounding connection		⏏ Diode connection

Screw connection technology 2

Feed-through and ground terminal blocks

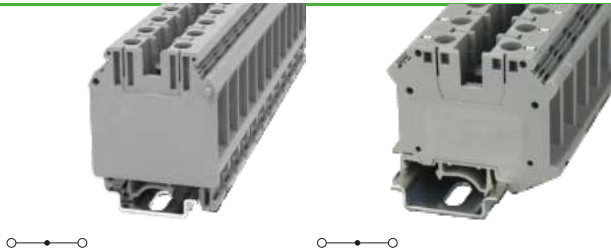

PC35

PCIK35

Order NO.		11010000059				11010000122			
Width/Length/Height(NS35/7.5&NS35/15) mm		15.2/50/63.25(70.75)				15.2/55/51.25(58.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									


Screw connection technology 2

Feed-through and ground terminal blocks




PC35-PE

Order NO.		11010000067			
Width/Length/Height(NS35/7.5&NS35/15) mm		15.2/50/63.25(70.75)			
Electrical Data		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	/		/	
Rated current	A	/		/	
Rated cross section	mm² /AWG	0.2-35		1/0-18	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-35	0.2-35	0.2-35	0.2-35
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.75-10
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)			
Stripping length	mm	18-19			
Color		Yellow and green			
Screw/Rated torque	-/N.m(lb.in)(kgf.cm)	M6/2.5(22.2)(25)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	1x6.5			
Flexed bridge		/			
Insertion bridge (2-10P)		EB10-15			
End cover		/			
Separating disk		/			
Partition plate		/			
Marker		ZT12 / ZS12			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

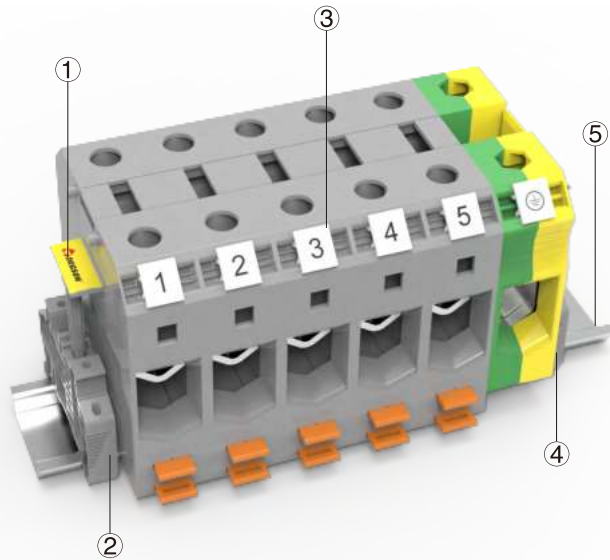


Description	No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Marker	ZT12-10P-19-00A(H)	Marker is used for the side of PC50 series
④ End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
⑤ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

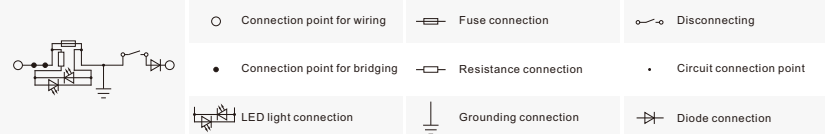

Screw connection technology 2


Feed-through and ground terminal blocks

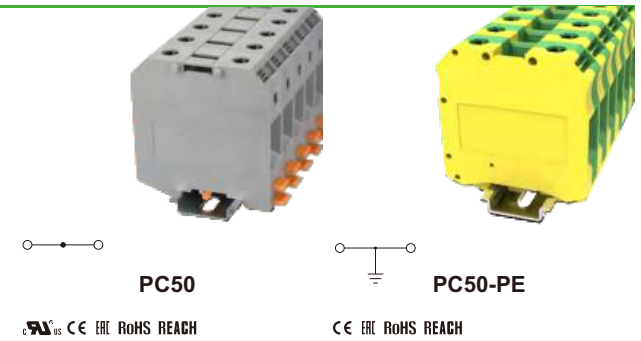

Order NO.	11010000085	11010000090
Width/Length/Height(NS35/7.5&NS35/15) mm	20/70.45/75.94(83.44)	20/70.45/75.94(83.44)
Electrical Data	IEC IEC60947-7-1	UL UL1059
Rated voltage V	1000	600
Rated current A	150	125
Rated cross section mm ² /AWG	16-50	6-1/0
Connection capacity	Solid Stranded Ferrule (with and without plastic sleeve)	Solid Stranded Ferrule (with and without plastic sleeve)
1 conductor mm ²	16-50	16-50
2 flexible conductors with a TWIN ferrule mm ²	—	—
General Information		
Insulation material/Flammability rating (according to UL 94)	PA/V0	PA/V0
Operation temperatures °C (°F)	-40(-40)~105(221)	-40(-40)~105(221)
Stripping length mm	22-23	22-23
Color	Grey, Red, Blue (please contact sales for other color requirements)	Yellow and green
Screw/Rated torque -/N.m(lb.in)(kgf.cm)	M6/2.5(22.2)(25)	M6/2.5(22.2)(25)
Accessories		
Ferrule	/	/
Slotted screwdriver size (Blade thickness x Width) mm	1.2x8	1.2x8
Flexed bridge (2,3P)	FBI2-20 / FBI3-20	/
Insertion bridge (2-10P)	/	/
End cover	/	/
Separating disk	/	/
Partition plate	/	/
Marker	ZT12 / ZS12	ZT12 / ZS12
Marker support	/	/
Terminal strip marker support	DLM2 / KLM3-20x8 / KLM3-44x8	DLM2 / KLM3-20x8 / KLM3-44x8
End clamp	E-PC 1100A / E-WS N	E-PC 1100A / E-WS N

Screw connection technology 2


Feed-through and ground terminal blocks

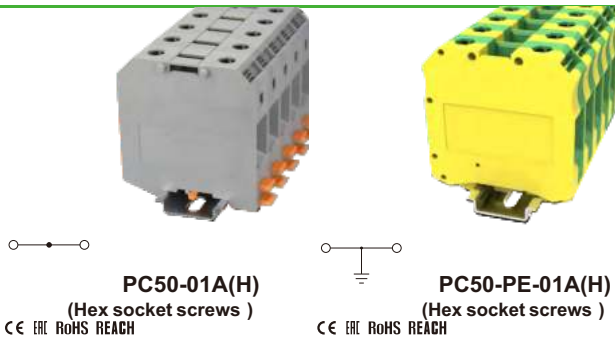

PC50-01A(H)
(Hex socket screws)
CE ENEC RoHS REACH

PC50-PE-01A(H)
(Hex socket screws)
CE ENEC RoHS REACH

Order NO.	11010002999				11010000193			
Width/Length/Height(NS35/7.5&NS35/15) mm	20/70.45/75.94(83.44)				20/70.45/75.94(83.44)			
Electrical Data	IEC		UL		IEC		UL	
	IEC60947-7-1		UL1059		IEC60947-7-2		UL1059	
Rated voltage								

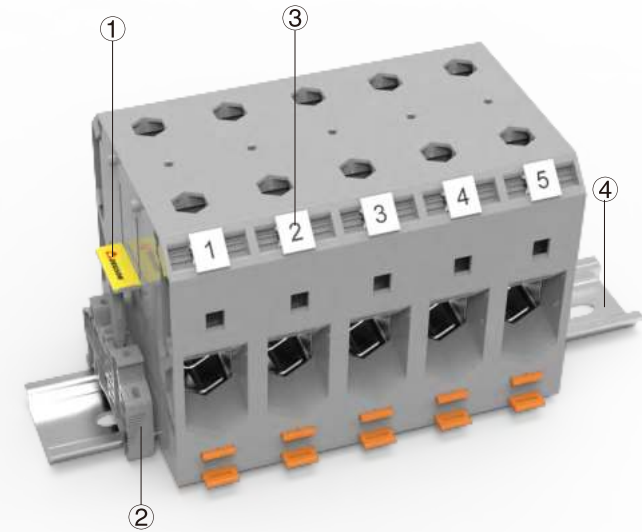

Description	No.	Remark
① Marker carrier	KLM3-20x8-11-00A(H)	Suitable for E-PC-1100A(H) & E-WS N
② End Clamp	E-WS N-01P-11-00A(H)	Fixing products on NS35 DIN rail
③ Marker	ZT12-10P-19-00A(H)	Marker is used for the side of PC95
④ DIN rail	NS35/7.5-0150-00A(H)	NS35 DIN rail

Circuit diagram

	○ Connection point for wiring		— Fuse connection		⋈ Disconnecting
	● Connection point for bridging		— Resistance connection	•	• Circuit connection point
			— Grounding connection		— Diode connection

Screw connection technology 2

Feed-through terminal blocks




PC95

CE ENEC RoHS REACH

Order NO.		11010000112			
Width/Length/Height(NS35/7.5&NS35/15) mm		25/83/90.04(97.54)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	1000		600	
Rated current	A	232		230	
Rated cross section	mm² /AWG	25-95		2-4/0	
Connection capacity		Solid	Stranded	Female (with and without plastic sleeve)	
1 conductor	mm²	25-95	25-95	25-95	25-50
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	25-35
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (℉)	-40(-40)~105(221)			
Stripping length	mm	31-33			
Color		Grey,Red,Blue (please contact sales for other color requirements)			
Screw/Rated torque	-/N.m(lb.in)(kgf.cm)	M8/25(221.5)(250)			
Accessories					
Ferrule		/			
Allen key		Hex socket 6			
Fixed bridge		/			
Insertion bridge (2-10P)		/			
End cover		/			
Separating disk		/			
Partition plate		/			
Marker		ZT12 / ZS12			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

PC Micro And Miniature Terminal Blocks

- PC Mini Feed-through terminal blocks, with screw connection technology, high-quality copper screw and cage ensure the stable & reliable connection
- Small volume, applied in small control boxes by mounted on NS15 DIN Rail
- The fixed bridge can realize the potential distribution of 2-10 positions; the cuttable side bridges can reach jumped connection
- Compatible with the marking system to clearly identify the working area

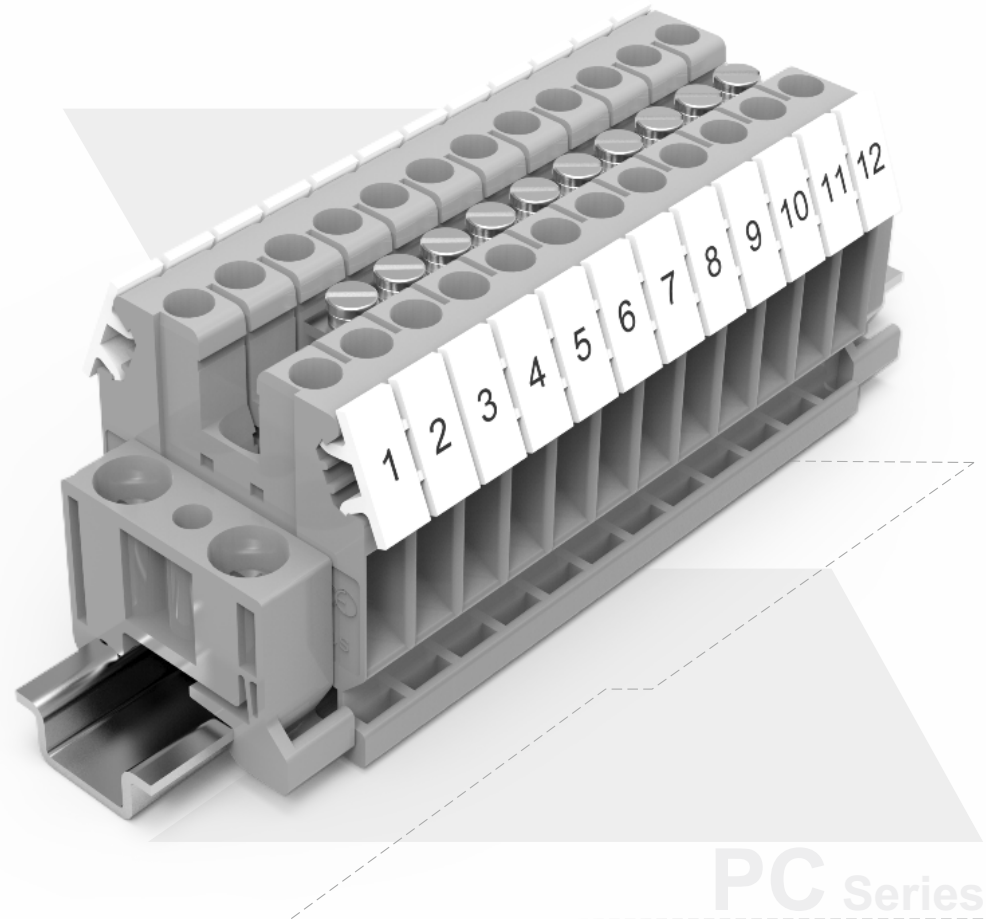

PC Series

Screw connection technology 2

Micro and miniature terminal blocks



PCMB2.5

UL CE ENE RoHS REACH

Order NO.		11010000140			
Width/Length/Height(NS15)	mm	5.2/28/33.7			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	500		300	
Rated current	A	24		20	
Rated cross section	mm ² /AWG	0.2-2.5		28-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-2.5	0.2-2.5	0.2-2.5	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-1
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		℃ (°F)		-40(-40)~105(221)	
Stripping length		mm		7-8	
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque		~N.m(lb.in)(kgf.cm)		M3/0.5(4.5)(5.1)	
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm		0.6x3.5	
Fixed bridge (2,3,4,5,6,8,10P)				FB110-5	
Insertion bridge (2-10P)				EB2-5 / EB3-5 / EB10-5	
End cover				D-PCMB2.5	
Separating disk				TS-KK3	
Partition plate		/			
Marker				ZB5 / ZS5	
Marker support		/			
Terminal strip marker support				DLM2 / KLM3-20x8 / KLM3-44x8	
End clamp				E-PC 1100A / E-WS N	

Screw connection technology 2

Micro and miniature terminal blocks




PCMB4

UL CE ENE RoHS REACH

Order NO.		11010000143			
Width/Length/Height(NS15)	mm	6.2/28/33.7			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	500		300	
Rated current	A	32		30	
Rated cross section	mm ² /AWG	0.2-4		26-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-4	0.2-4	0.2-4	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-2.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		℃ (°F) -40(-40)~105(221)			
Stripping length		mm 7-8			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque		-/N.m(lb.in)(kgf.cm) M3/0.5(4.5)(5.1)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm 0.6x3.5			
Fixed bridge (2,3,5,7,8,10P)		 FB110-6			
Insertion bridge (2-10P)		 EB2-6 / EB3-6 / EB10-6			
End cover		 D-PCMB2.5			
Separating disk		 TS-KK3			
Partition plate		/			
Marker		 ZB6 / ZS6			
Marker support		/			
Terminal strip marker support		 DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		 E-PC 1100A / E-WS N			

PC Fuse Terminal Blocks

- PC Fuse type terminal blocks, with screw connection technology, high-quality copper screw and cage ensure the stable & reliable connection
- Snap-on fuse box for easy fuse replacement
- The cuttable side bridges can reach jumped connection
- Compatible with the marking system to clearly identify the working area

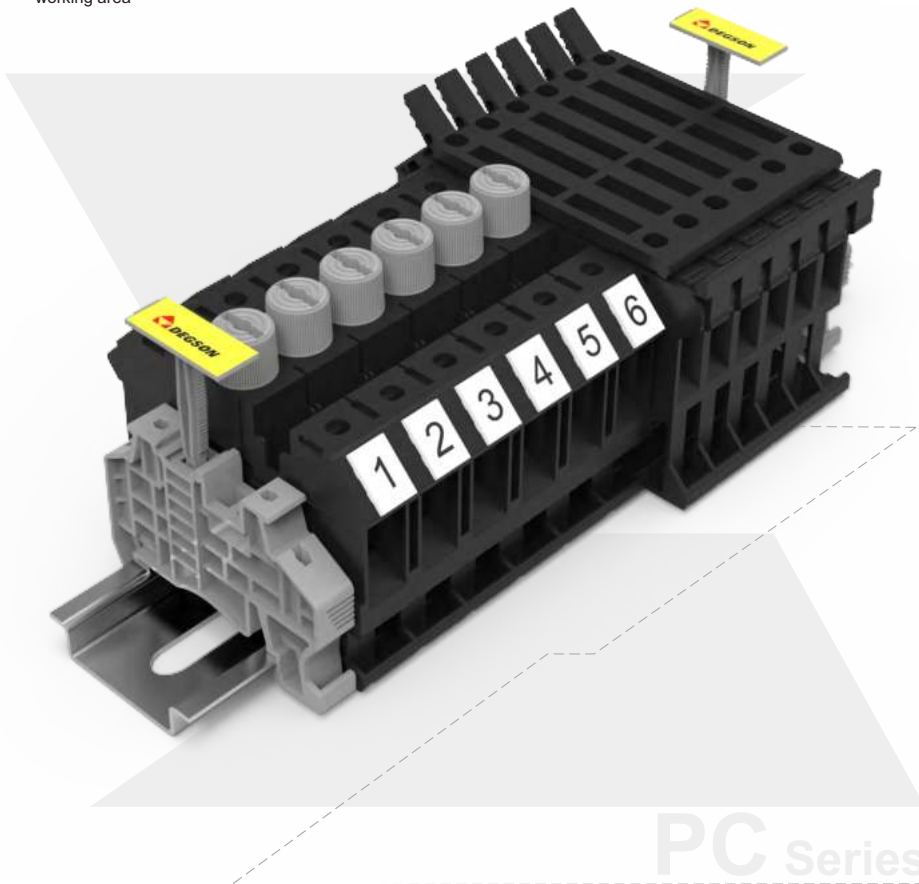

PC Series

Screw connection technology 2

Fuse terminal blocks
(5X20, 5X25, 6.3X32)



PC4-HE

Order NO.		11010000076			
Width/Length/Height(NS35/7.5&NS35/15) mm		8.2/72.89/57.37(64.87)			
Electrical Data		IEC IEC60947-7-3		UL UL1059	
Rated voltage	V	800		600	
Rated current	A	6.3		6.3	
Rated cross section	mm ² /AWG	0.2-4		26-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-4	0.2-4	0.2-4	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-2.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		℃ (°F)			
Stripping length		mm			
Color		Black (please contact sales for other color requirements)			
Screw/Rated torque		-/N.m(lb.in)(kgf.cm)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm			
Fixed bridge		/			
Insertion bridge (2,3,10P)		EB2-8 / EB3-8 / EB10-8			
End cover		/			
Separating disk		/			
Partition plate		/			
Marker		ZB8 / ZS8			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

Screw connection technology 2

Fuse terminal blocks (5X20)




PC10-DR

UL CE ENE RoHS REACH

Order NO.		11010000005			
Width/Length/Height(NS35/7.5&NS35/15) mm		12/62/57.8(64.75)			
Electrical Data		IEC IEC60947-7-3		UL UL1059	
Rated voltage	V	800		600	
Rated current	A	10		10	
Rated cross section	mm ² /AWG	0.5-10		24-6	
Connection capacity		Solid	Stranded	Femle (with and without plastic sleeve)	
1 conductor	mm ²	0.5-10	0.5-10	0.5-10	0.5-10
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-10
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	°C (°F)	-40(-40)~105(221)			
Stripping length	mm	10-11			
Color		Black (please contact sales for other color requirements)			
Screw/Rated torque	~N.m(lb.in)(kgf.cm)	M4/1.2(10.5)(12.24)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	1x4			
Fixed bridge		FB110-10			
Insertion bridge (2-10P)		EB10-12			
End cover		/			
Separating disk		/			
Partition plate		/			
Marker	 	ZB8 / ZS8			
Marker support		/			
Terminal strip marker support	 	DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp	 	E-PC 1100A / E-WS N			

PC Disconnect Terminal Blocks

- PC Knife disconnect terminal blocks, with screw connection technology, high-quality copper screw and cage ensure the stable & reliable connection
- The circuit can be disconnected, measured, controlled easily by operate the knife disconnecter
- Snap-on knife disconnecter to prevent accidental disconnection
- Compatible with the marking system to clearly identify the working area

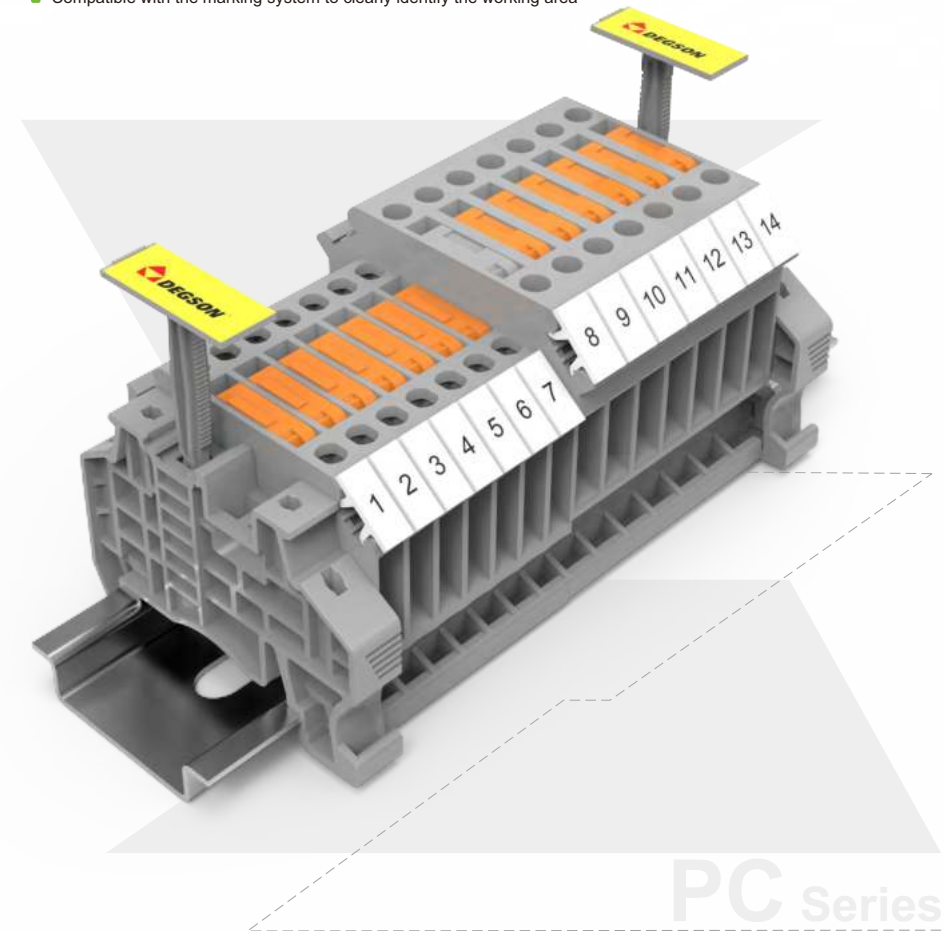

PC Series

Screw connection technology 2

Disconnect terminal blocks



PCMT2.5

CE ENEC RoHS REACH

Order NO.		11010000144			
Width/Length/Height(NS35/7.5&NS35/15) mm		5.2/46.25/48.18(55.68)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	500		300	
Rated current	A	16		10	
Rated cross section	mm ² /AWG	0.2-2.5		24-14	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-2.5	0.2-2.5	0.2-2.5	0.2-1.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-1.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures °C (°F)		-40(-40)~105(221)			
Stripping length mm		10-11			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque -/N.m(lb.in)/(kgf.cm)		M3/0.5(4.5)(5.1)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width) mm		0.6x3.5			
Fixed bridge		/			
Insertion bridge (2-10P)		 EB2-5 / EB3-5 / EB10-5			
End cover		 D-PCMT2.5			
Separating disk		/			
Partition plate		/			
Marker		 ZB5 / ZS5			
Marker support		/			
Terminal strip marker support		 DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		 E-PC 1100A / E-WS N			

Screw connection technology 2

Disconnect terminal blocks




PCMT4

CE ENEC RoHS REACH

Order NO.		11010000145			
Width/Length/Height(NS35/7.5&NS35/15) mm		6.2/51/47.4(54.9)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	800		600	
Rated current	A	16		15	
Rated cross section	mm² /AWG	0.2-4		24-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-4	0.2-4	0.2-4	0.2-2.5
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-2.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		℃ (°F)		-40(-40)~105(221)	
Stripping length		mm		7-8	
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque		-/N.m(lb.in)/(kgf.cm)		M3/0.5(4.5)(5.1)	
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm		0.6x3.5	
Fixed bridge		/			
Insertion bridge (2-40P)		 EB2-6 / EB3-6 / EB10-6 / EBA40-6			
End cover		/			
Separating disk		/			
Partition plate		/			
Marker		 ZB6 / ZS6			
Marker support		/			
Terminal strip marker support		 DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		 E-PC 1100A / E-WS N			

PC Test Disconnect Terminal Block


- PC Test disconnect terminal block, with screw connection technology, high-quality copper screw and cage ensure the stable & reliable connection
- The circuit can be disconnected, measured, controlled easily by operate the slide disconnecter
- Combined with bushings and bridges, it can short-circuit protection for circuits, which is convenient for protecting and measuring secondary circuits
- Suitable for measurement and control engineering

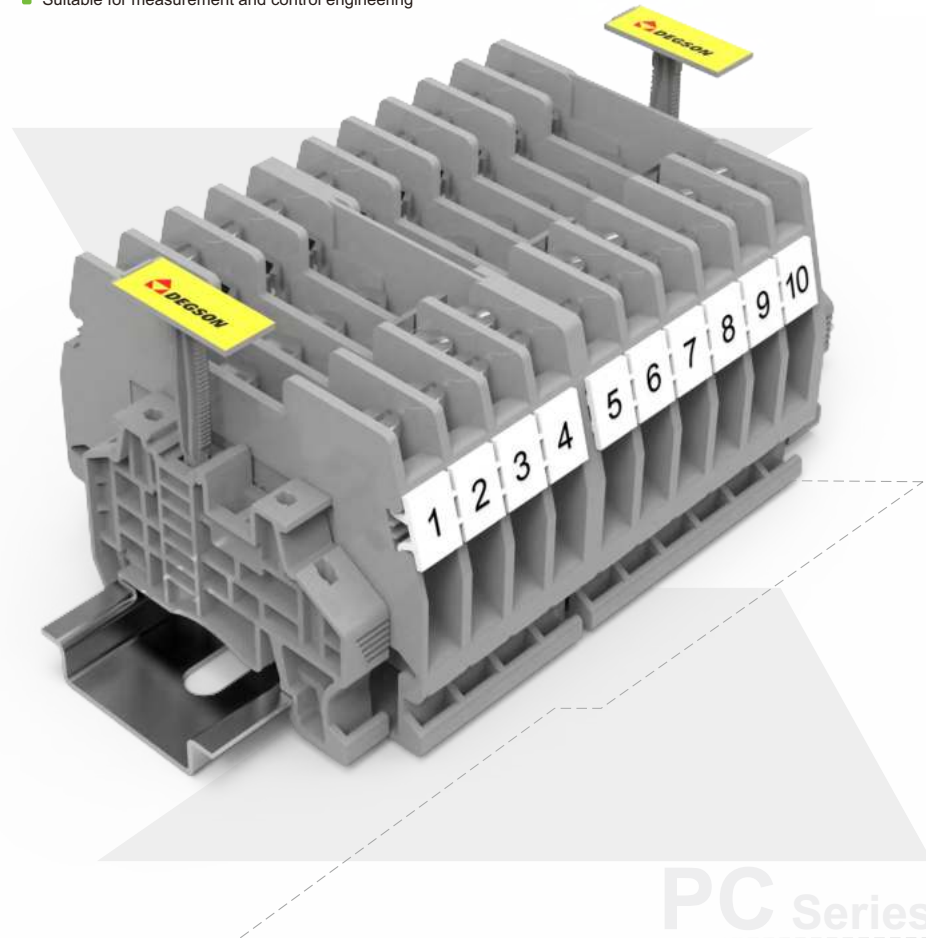

PC Series

Screw connection technology 2

Test disconnect terminal blocks

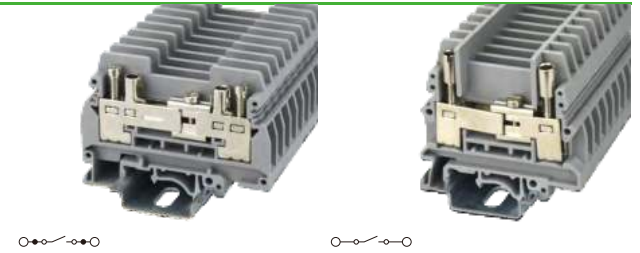

PCTK6

PCTK6-BEN

cUL US CE ENE RoHS REACH


CE ENE RoHS REACH

Order NO.		11010000146				11010000149			
Width/Length/Height(NS35/7.5&NS35/15) mm		8.2/72/51.75(59.25)				8.2/61/58.85(67.35)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	400		300		500		300	
Rated current	A	41		40		41		40	
Rated cross section	mm ² /AWG	0.5-6		26-10		0.5-6		26-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.5-6	0.5-6	0.5-6	0.5-4	0.5-6	0.5-6	0.5-6	0.5-4
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-4	—	—	—	0.5-4
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)				-40(-40)~105(221)			
Stripping length	mm	13-14				11-12			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque	-/N.m(lb.in)(kgf.cm)	M4/1.2(10.53)(12.24)				M4/1.2(10.53)(12.24)			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)	mm	1x4				1x4			
Flexed bridge (2-10P)		FBXX-RTK/S				/			
Switch bridges(2-10P)		SB02-RTK/S				/			
Insertion bridge (2-10P)		EB2-8 / EB3-8 / EB10-8				EB2-8 / EB3-8 / EB10-8			
End cover		D-PCTK6				D-PCTK6-BEN			
Separating disk		/				/			
Partition plate		/				/			
Marker		ZB8 / ZS8				ZB8 / ZS8			
Marker support		/				/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8				DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N				E-PC 1100A / E-WS N			

BS Bolt Connection Terminal Blocks

Feature

- BS Bolt connection terminal blocks, with bolt connection technology, secure connection
- Multiple cable ends can be connected with a single screw, which can be used for power feed
- Closed structure design at both ends, with protective cover, safe and anti-touch
- Compatible with the marking system to clearly identify the working area
- Equipped with test hole in the middle, easy to test the circuit

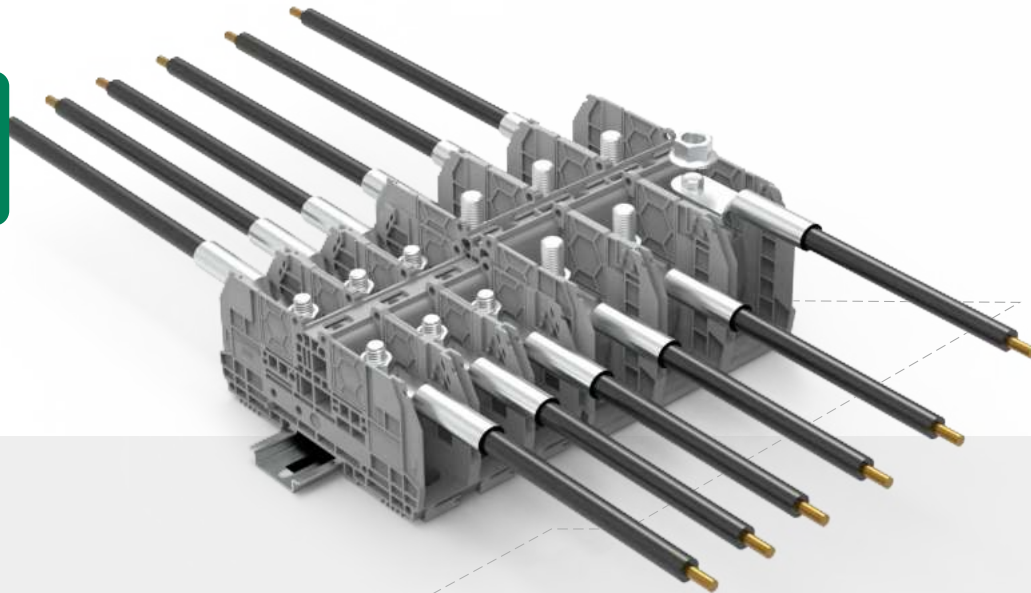

Bolt connection

BS Series products include BS8, BS10 bolt connection terminal blocks, can connect wires with diameters from 2.5mm² to 150mm²



Removable cover

Closed structure design at both ends, with protective cover, safe and anti-touch




Flexible installation

Variety installation methods, available for panel & Rail mounted

BS Series

Bolted connection technology

Bolt type straight through terminal blocks

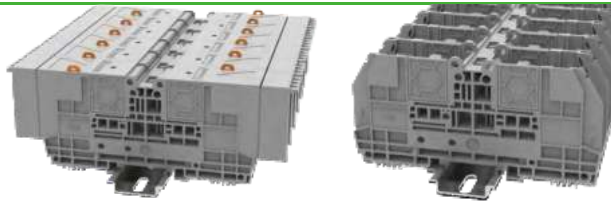

BS8



BS8 N


CE RoHS REACH

CE RoHS REACH

Order NO.		11070000001				11070000002			
Width/Length/Height(NS35/7.5&NS35/15) mm		29/184/70.7(78.2)				29/136/70.7(78.2)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Bolted connection technology

Bolt type straight through terminal blocks

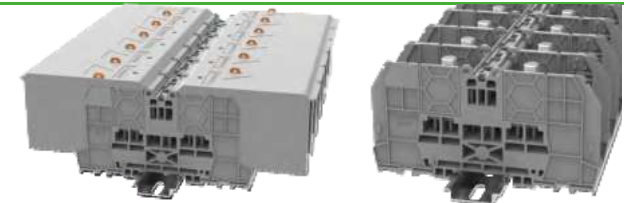

BS10



BS10 N

CE RoHS REACH

CE RoHS REACH

Order NO.		11070000003				11070000004			
Width/Length/Height(NS35/7.5&NS35/15) mm		41/235/86(93.5)				41/144/86(93.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-1		UL UL1059	
Rated voltage									

Marking System


Degson printer marking system, providing a complete solution for industrial site identification case. Our thermal transfer printers and laser printers provide customers with terminal blocks marker, wire marker, device marker Printing Service



Marking System



Marking System



Terminal Blocks Marker



Cable Marker




Device Marker



Accessories

Marking System

The Vario plotter is easy to operate and can feed the request for batches printing. PTT thermal transfer printer can print ZS, ZSF series markers in high speed.

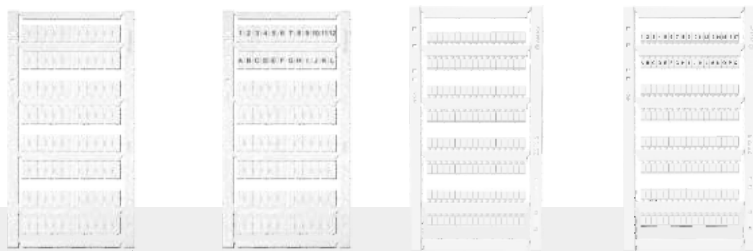

Marking System

Vario Writing Machine



- Flexible drawing function to realize various marker printing. Automatic calibration of printing requirements for better marks Influence
- Large area recognition area, batch printing

Technical Data			
Dimension(mm)	Width	Length	High
	470	480	155
Marking area (mm)	273x305		
Maximum drawing speed(mm/s)	40		
Interface	USB2.0		
Input voltage (V)	100-240VAC / 50-60 Hz		
Material Data			
Description: The Vario writing machine			
Type	Order NO.		
PM-00A	99020000001		
Accessories			
Accessories	Order NO.		
Template	99020000006		
Writing pen	99020000002		
Ink	99020000003		

PTT Thermal Transfer Printer




- Support plate printing to identify terminals, suitable for ZS, ZSF series standard markers
- Thermal transfer printing technology to realize fast batch printing

Technical Data			
Dimension(mm)	Width	Length	High
	345	218	256
Temperature range(°C)	0~45		
Print resolution(dpi)	300		
Maximum print width(mm)	102		
Interface	Ethernet / USB Type B / USB3.0 / RS232		
Material Data			
Description: Plate Thermal Transfer Printer			
Type	Order NO.		
PTT	99020000073 (To be released)		
Accessories			
Accessories	Order NO.		
ZS Fixture	/		
ZSF Fixture	/		

Terminal Blocks Marker

The terminal blocks markers can clearly and intuitively mark the number of position, ensure the correctness of wiring, and also convenient for the maintenance and test of control cabinet

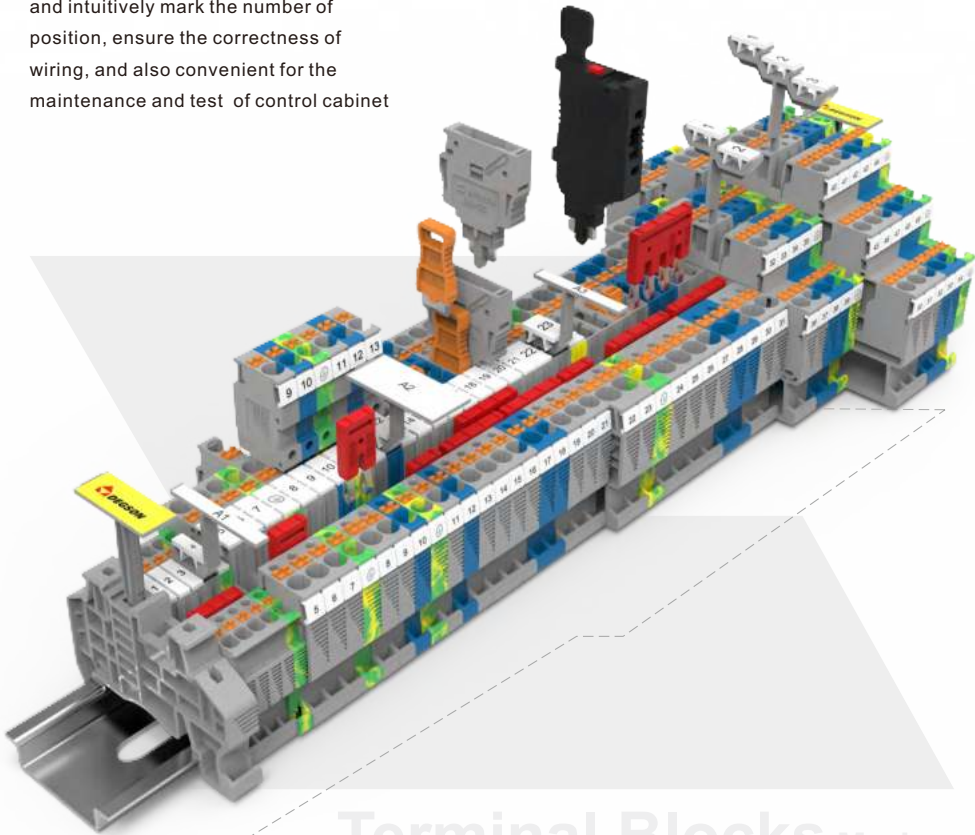


Terminal Blocks Marker

ZC Series Markers



- Easy to install and remove
- Markers available in various widths
- Marking service: according to the printing needs of different customers
- We can provide customized printing service

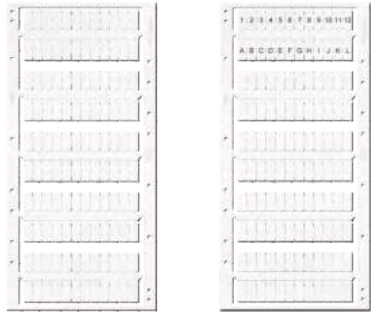

Technical Data

Applicable printer	Vario, Thermal Transfer Printer	
Marking material	PC	
Flammability rating, acc.to UL 94	V2	
Temperature range(°C)	-40~110	
Ingredient	Silicone and gluten free	
Applicable terminals	Terminal series	Installation location
	DC	Top

Material Data


Description: Marker strip, not printed

Color: White (please contact sales for other color requirements)


Type	Order NO.	Applicable width(mm)	Number of positions
ZC5	92118901439	5.1	120

The customized service will be provided according to the special printing requirements of customers.

ZS Series Markers



- Top marker
- Easy to install and remove
- Markers available in various widths
- Marking service: according to the printing needs of different customers, we can provide customized printing service

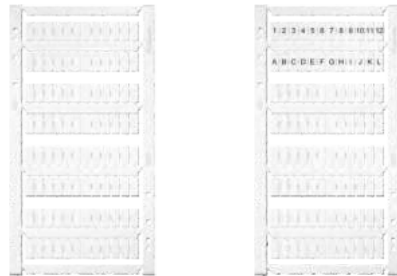


Technical Data			
Applicable printer	Vario, Thermal Transfer Printer		
Marking material	PC		
Flammability rating, acc.to UL 94	V2		
Temperature range(°C)	-40~110		
Ingredient	Silicone and gluten free		
Applicable terminals	Terminal series	Installation location	
	DS / PC	Top	
Material Data			
Description: Marker strip, not printed			
Color: White (please contact sales for other color requirements)			
Type	Order NO.	Applicable width(mm)	Number of positions
ZS3.5	11060000590	3.5	136
ZS5	11060000591	5.2	96
ZS6	11060000592	6.2	80
ZS8	11060000593	8.2	56
ZS10	11060000594	10.2	48
ZS12	11060000595	12.2	40

The customized service will be provided according to the special printing requirements of customers.

ZS Series Markers


ZS series markers have: ZS3.5, ZS5, ZS6, ZS8, ZS10, ZS12 six series in total.




ZS3.5




ZS5




ZS6



ZS8




ZS10




ZS12

ZSF Series Markers



- Side marker
- Easy to install and remove
- Markers available in various widths
- Marking service: according to the printing needs of different customers, we can provide customized printing service

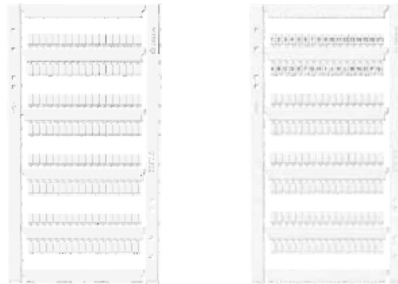

Technical Data

Applicable printer	Vario, Thermal Transfer Printer	
Marking material	PC	
Flammability rating, acc.to UL 94	V2	
Temperature range(°C)	-40~110	
Ingredient	Silicone and gluten free	
Applicable terminals	Terminal series	Installation location
	DS / PC	Side

Material Data

Description: Marker strip, not printed


Color: White (please contact sales for other color requirements)

Type	Order NO.	Applicable width(mm)	Number of positions
ZSF3.5	11060000596	3.5	136
ZSF5	11060000597	5.2	96
ZSF6	11060000598	6.2	80
ZSF8	11060000599	8.2	56
ZSF10	11060000600	10.2	48
ZSF12	11060000601	12.2	40


The customized service will be provided according to the special printing requirements of customers.

ZSF Series Markers


ZSF series markers have ZSF3.5, ZSF5, ZSF6, ZSF8, ZSF10, ZSF12 six series in total.




ZSF3.5




ZSF5




ZSF6



ZSF8




ZSF10



ZSF12

ZB Series Marker Strip



- Easy to install and remove
- Markers available in various widths
- Can be printed with Vario
- Marking service: according to the printing needs of different customers, we can provide customized printing service

Technical Data		
Applicable printer	Vario	
Marking material	PA	
Flammability rating, acc.to UL 94	V0	
Temperature range(°C)	-40~105	
Ingredient	Silicone and gluten free	
Applicable terminals	Terminal series	Installation location
	DS / PC	Top
Material Data		


Description: Marker strip, not printed

Color: White (please contact sales for other color requirements)

Type	Order NO.	Applicable width(mm)	Number of positions
ZB3.5	92118900094	3.5	10
ZB4	92118900109	4.2	10
ZB5	92118900129	5.2	10
ZB6	92118900430	6.2	10
ZB8	92118900578	8.2	10
ZB10	92118900024	10.2	10

The customized service will be provided according to the special printing requirements of customers.

ZK Series Marker Strip



- Easy to install and remove
- Can be printed with Vario
- Marking service: according to the printing needs of different customers, we can provide customized printing service

Technical Data		
Applicable printer	Vario	
Marking material	PC	
Flammability rating, acc.to UL 94	V2	
Temperature range(°C)	-40~110	
Ingredient	Silicone and gluten free	
Applicable terminals	Terminal series	Installation location
	DS	Side
Material Data		

Description: Marker strip, not printed

Color: White (please contact sales for other color requirements)

Type	Order NO.	Applicable width(mm)	Number of positions
ZK5	92118901170	5.2	24
ZK6	92118901207	6.2	20

The customized service will be provided according to the special printing requirements of customers.

ZT Series Marker Strip



- Easy to install and remove
- Can be printed with Vario
- Marking service: according to the printing needs of different customers, we can provide customized printing service

Technical Data		
Applicable printer	Vario	
Marking material	PC	
Flammability rating, acc.to UL 94	V2	
Temperature range(°C)	-40~110	
Ingredient	Silicone and gluten free	
Applicable terminals	Terminal series	Installation location
	DS / WS / PC / DC	Top
Material Data		

Description: Marker strip, not printed

Color: White (please contact sales for other color requirements)

Type	Order NO.	Applicable width(mm)	Number of positions
ZT12	92118901290	12.2	10

The customized service will be provided according to the special printing requirements of customers.

WB Series Markers



- Easy to install and remove
- Available in 4mm and 5mm widths
- Can be printed with Vario
- Marking service: according to the printing needs of different customers, we can provide customized printing service

Technical Data		
Applicable printer	Vario	
Marking material	PA	
Flammability rating, acc.to UL 94	V0	
Temperature range(°C)	-40~105	
Ingredient	Silicone and gluten free	
Applicable terminals	Terminal series	Installation location
	WS	Top
Material Data		

Description: Marker strip, not printed

Color: White (please contact sales for other color requirements)

Type	Order NO.	Applicable width(mm)	Number of positions
WB4	92118900841	4	100
WB5	92118900002	5	100

The customized service will be provided according to the special printing requirements of customers.

DEK Series Markers



- Easy to install and remove
- Markers available in various widths
- Can be printed with Vario
- Marking service: according to the printing needs of different customers, we can provide customized printing service

Technical Data		
Applicable printer	Vario	
Marking material	PA	
Flammability rating, acc.to UL 94	V0	
Temperature range(°C)	-40~105	
Ingredient	Silicone and gluten free	
Applicable terminals	Terminal series	Installation location
	WS	Side
Material Data		

Description: Marker strip, not printed

Color: White (please contact sales for other color requirements)

Type	Order NO.	Applicable width(mm)	Number of positions
DEK4	92118900750	4	50
DEK5	92118900753	5	50
DEK6	92118900791	6	50

The customized service will be provided according to the special printing requirements of customers.

ZW Series Markers



- Easy to install and remove
- Markers available in various widths
- Can be printed with Vario
- Marking service: according to the printing needs of different customers, we can provide customized printing service

Technical Data		
Applicable printer	Vario	
Marking material	PA	
Flammability rating, acc.to UL 94	V0	
Temperature range(°C)	-40~105	
Ingredient	Silicone and gluten free	
Applicable terminals	Terminal series	Installation location
	WS	Top
Material Data		


Description : Marker strip, not printed

Color: White (please contact sales for other color requirements)

Type	Order NO.	Applicable width(mm)	Number of positions
ZW5	92118900703	5.1	40

The customized service will be provided according to the special printing requirements of customers.

DTH Marker Carrier



- Marking directly on the terminal blocks
- Suitable for 3.5mm and 5.2mm width terminals
- Extended Marking area
- Marking can be done directly with self-adhesive labels



Technical Data			
Marking material	PA		
Flammability rating, acc.to UL 94	V0		
Temperature range(°C)	-40~105		
Ingredient	Silicone and gluten free		
Material Data			
Description: Stuck in the center of the terminal, can be directly marked with DML labels, ZS3.5 or ZS5 installed on the bottom			
Color: Grey (please contact sales for other color requirements) Labels for reel printers			
Type	Order NO.	Foot width(mm)	Marking range(mm)
DTH3.5-25x3.5	10060000570	3.5	25x3.5
DTH3.5-25x12	10060000567	3.5	25x12
DTH5-25x5	10060000569	5	25x5
DTH5-25x12	10060000568	5	25x12
Accessories			
Type	Labels for reel printers		
DML(25x3.5)	1 reel =10000 pcs markers		
DML(25x12)	1 reel =10000 pcs markers		
DML(25x5)	1 reel =10000 pcs markers		

The customized service will be provided according to the special printing requirements of customers.

DMTH Marker Bracket, Useing For Marking Multi-level Terminals




- Increase the size of the sign area
- Marker brackets can be mounted over multi-level terminals



Technical Data				
Marking material		PA		
Flammability rating, acc.to UL 94		V0		
Temperature range(°C)		-40~105		
Ingredient		Silicone and gluten free		
Material Data				
Description: Marker strip, not printed				
Color: Grey (please contact sales for other color requirements)				
Type	Order NO.	Number of shelf layers	Applicable terminals	Applicable markers
DMTH5-2	11060000588	Double-layer	DSKK2.5 Double-layer terminal	ZS5 / ZB5
DMTH5-3	11060000589	Triple-layer	DS2.5-3L Triple-layer terminal	ZS5 / ZB5

The customized service will be provided according to the special printing requirements of customers.

Terminal Blocks Marker



- KLM series product dedicated to E-PC-1100A(H)/E-WS End stopper
- The height of marking area is adjustable
- Three-section support bar can be cut at will

Technical Data			
Marking material	PA		
Flammability rating, acc.to UL 94	V0		
Temperature range(°C)	-40~105		
Material Data			
Description: Terminal strip markers, height can be adjusted and cut			
Color: White (please contact sales for other color requirements)			
Type	Order NO.	Applicable end stopper	Identity range (mm)
KLM3-20x8	10060000573	E-PC-1100A / E-WS N	20x8
KLM3-44x8	10060000574	E-PC-1100A / E-WS N / E-WS-5	44x8
Accessories			
Type	Labels for reel printers		
DML(20x8)	1 reel =10000 pcs markers		
DML(44x8)	1 reel =10000 pcs markers		

The customized service will be provided according to the special printing requirements of customers.

DBE-1 Terminal Blocks Marker



- Can be mounted directly on DIN rail for terminal blocks marker
- Can be used alone or with DLM



Technical Data			
Dimension(mm)	Width	Length	High
	15.6	44	45.6
Marking material	PA		
Flammability rating, acc.to UL 94	V0		
Temperature range(°C)	-40~105		
Material Data			
Description: Terminal blocks marking			
Color: Grey (please contact sales for other color requirements)			
Type	Order NO.	Identity range(mm)	
DBE-1	11060000210	40x12	

DBE-2 Terminal Blocks Marker



- Can be mounted directly on DIN rail for terminal blocks marker
- Can be used alone or with DLM



Technical Data			
Dimension(mm)	Width	Length	High
	9.5	43.5	45.9
Marking material	PA		
Flammability rating, acc.to UL 94	V0		
Temperature range(°C)	-40~105		
Material Data			
Description: Terminal blocks marking			
Color: Grey (please contact sales for other color requirements)			
Type	Order NO.	Identity range(mm)	
DBE-2	11060000286	35x8	

DLM Terminal Blocks Marker




- Use with DBE to realize the marking function



Technical Data			
Dimension(mm)	Width	Length	High
	9.5	46	36.8
Marking material	PC		
Flammability rating, acc.to UL 94	V2		
Temperature range(°C)	-40~110		
Material Data			
Description: Terminal blocks marking			
Color: Transparent (please contact sales for other color requirements)			
Type	Order NO.	Accessories	
DLM2	11060000214	DBE-1,DBE-2, E-PC series	

Warning Marker



- Warning marker are used to identify power terminal blocks
- Prevent mishandling the connection points of wires



Technical Data		
Marking material	PA	
Flammability rating, acc.to UL 94	V0	
Temperature range(°C)	-40~105	
Material Data		
Description: Safety warning marker for WS series		
Color: Yellow (please contact sales for other color requirements)		
Type	Order NO.	Applicable width(mm)
EEA1.5	92118901391	4
EEA2.5	11060000064	5
EEA4	11060000065	6
EEA6	11060000066	8
EEA10	92118901059	10
EEA16	92118901060	12


Cable Marker

Cable maker can clearly and intuitively mark the pin numbers of cables in the control cabinet and switch cabinet, making the installation and maintenance of components in the control cabinet easier and more efficient



Cable Marker

Mark Sleeves




- DSL series marking sleeves for long-term cable marking
- Marker sleeves provide electrical insulation and mechanical protection of conductors



■ Development

Technical Data		
Applicable printer	Reel printer	
Marking material	Polyolefin	
Temperature range(°C)	-55~125	
Scratch resistance	DIN EN 61010-1 (VDE 0411-1)	
Ingredient	Halogen Free	
Material Data		
Description: Marking sleeve for wire diameter xx mm		
Color: White (please contact sales for other color requirements)		
Type	Order NO.	Specification
DSL-ZH	/	1 reel = xx m

Thermal Casing



- DSSL series marking sleeves for long-term cable marking
- Prefabricated heat-shrinkable sleeves, fixed first and then heat-shrunked
- Thermal casing provide electrical insulation and mechanical protection of conductors




■ Development

Technical Data		
Applicable printer	Reel printer	
Marking material	Polyolefin	
Temperature range(°C)	-55~105	
Scratch resistance	DIN EN 61010-1 (VDE 0411-1)	
Ingredient	Halogen Free	
Shrinkage	2:1	
Material Data		
Description: Marking sleeve for wire diameter xx mm		
Color: White (please contact sales for other color requirements)		
Type	Order NO.	Specification
DSSL-2-ZH	/	1 reel = xx m , continuous

Device Marker

Device marker the surface of the equipment or electrical components, plays a role in identification, and can clarify the functions and application of the device or electrical components

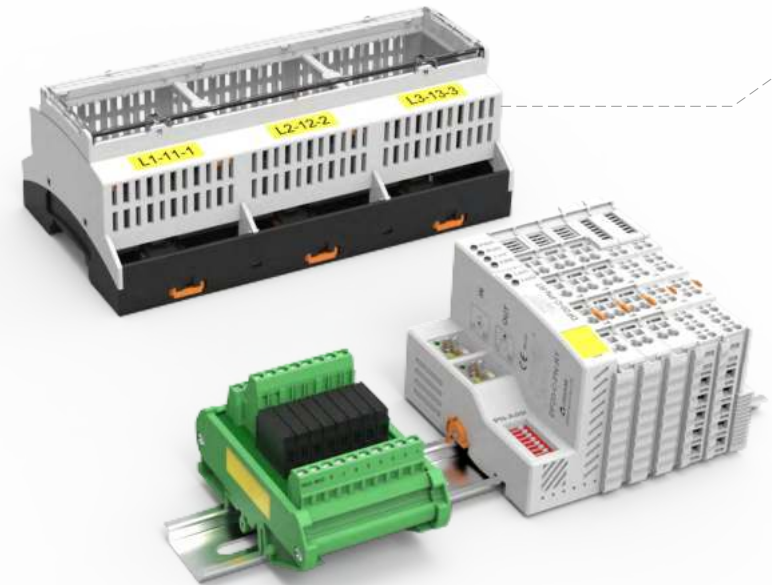

Device Marker

Self-adhesive Device Markers for Buttons



- Self-adhesive markers for marking electronic buttons and indicators on control cabinets
- Printed content is tested against a variety of laboratory standards and can be used in harsh industrial environments

Development

Technical Data			
Applicable printer	Button diameter		
Marking material	Polyester		
Temperature range(°C)	-40~120		
Scratch resistance	DIN EN 61010-1 (VDE 0411-1)		
Ingredient	Silicone and gluten free		
Material Data			
Color: White (please contact sales for other color requirements)			
Type	Order NO.	Button diameter(mm)	Specification
DBML24	/	24	1 reel = xx m
DBML30	/	30	1 reel = xx m

DMLSelf-adhesive Device Markers



- Self-adhesive labels can be used for marking on a variety of equipments can be used in harsh industrial environments

Development

Technical Data		
Applicable printer	Reel printer	
Marking material	Polyester	
Temperature range(°C)	-40~150	
Scratch resistance	DIN EN 61010-1 (VDE 0411-1)	
Ingredient	Silicone and gluten free	
Material Data		
Description: Label, printable with thermal transfer printer		
Color: White (please contact sales for other color requirements)		
Type	Order NO.	Specification
DML(24x3)	/	1 reel = xx m
DML(24x4)	/	1 reel = xx m

Self-adhesive PVC Device Markers, High Flexibility



- Highly flexible markers can be marked on curved and ribbed surfaces, can be used in harsh industrial environments

Development

Technical Data		
Applicable printer	Reel printer	
Marking material	PVC	
Temperature range(°C)	-40~90	
Scratch resistance	DIN EN 61010-1 (VDE 0411-1)	
Ingredient	Silicone and gluten free	
Material Data		
Description: Label, printable with thermal transfer printer		
Color: White (please contact sales for other color requirements)		
Type	Order NO.	Specification
DMLF(24x3)	/	1 reel = xx m
DMLF(24x4)	/	1 reel = xx m

Self-adhesive Device Marking, High Temperature




- High temperature labels for marking circuit boards

Development

Technical Data		
Applicable printer	Reel printer	
Marking material	Acrylate	
Temperature range(°C)	-40~180	
scratch resistance	DIN EN 61010-1 (VDE 0411-1)	
Ingredient	Silicone and gluten free	
Material Data		
Description: Label, printable with thermal transfer printer		
Color: White (please contact sales for other color requirements)		
Type	Order NO.	Specification
DHTML(24x3)	/	1 reel = xx m
DHTML(24x4)	/	1 reel = xx m

Accessories

DIN rails and end stopper can ensure reliable connection of electrical connectors and components in the control cabinet, shielded terminal blocks can ensure that wiring conforms EMC standards, and wire slot can ensure a beautiful performance of layout in the cabinet.

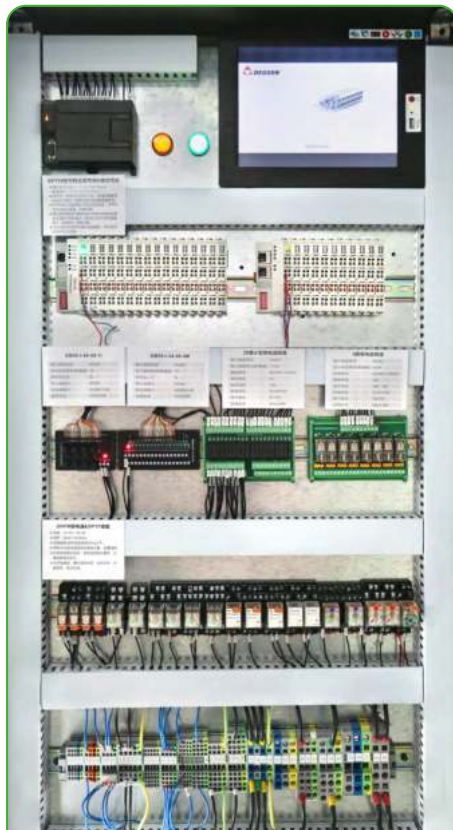

Accessories

DIN Rail NS15, Short Type



- DIN rails are designed according to European EN60715 standard
- High dimensional accuracy and surface polishing
- All DIN rails are available in lengths upon request

Material Data

Description: DIN-Rail, 1 meter length

Type	Order NO.	Material	Hole(mm)	Height(mm)
NS15	92113900003	Steel/Blue and white Zn Plated	4.1x12	5.5

DIN Rail NS35, Short Type




- DIN rails are designed according to European EN60715 standard
- High dimensional accuracy and surface polishing
- All DIN rails are available in lengths upon request

Material Data

Description: DIN-Rail, 1 meter length

Type	Order NO.	Material	Hole(mm)	Height(mm)
NS35-7.5	92113900022	steel/Zn Plated	6.2x15	7.5
NS35-7.5-AL	92113900037	Aluminum	5.2x15	7.5

Snap-in End Stopper

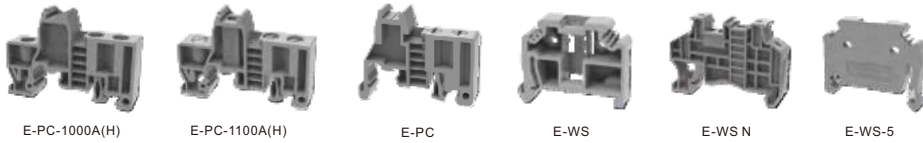

- End stopper can ensure a secure DIN rail system, the reliable marking area is large

Technical Data			
Marking material	PA		
Temperature range(°C)	-40~105		
Flammability rating, acc.to UL 94	V0		
Material Data			
Description: End clamp		Color: Grey	
Type	Order NO.	Width(mm)	Adapter bracket
E-PC-1000A(H)	11060000074	9.5	DLM2
E-PC-1100A(H)	/	9.5	DLM2 / KLM3-20x8 / KLM3-44x8
E-PC	11060000073	9.5	DLM2
E-WS	11060000127	10	/
E-WS N	/	8	KLM3-20x8 / KLM3-44x8
E-WS-5	11060000422	5	KLM3-20x8 / KLM3-44x8

Neutral Bus Bar



Technical Data					
Marking material			Copper		
Material Data					
Description: PEN Wire Bus Bars			Color: Grey		
Type	Order NO.	Rated current(A)	Length(mm)	Width(mm)	Height(mm)
DLS-CU3/10	92118900917	140	10	1000	3

Neutral Bus Bar Bracket

Bracket for shield connection terminal blocks DSK



- Brackets for supporting bus bars

Development

Technical Data				
Marking material		PA		
Flammability rating, acc.to UL 94		V0		
Material Data				
Description: Bracket, insulated, with set screws				
Color: Grey				
Type	Order NO.	Width(mm)	Length(mm)	Height(mm)
AB/DSS	/	19.4	23.4	21.7

Shield Terminal

Screw-shaped shield connection terminals of the DSK series




- Easy to operate
- Knurled screw
- Spring loaded, large head area
- Suitable for direct mount and bus bar mount



Material Data				
Description: Shield terminal block				
Type	Order NO.	Installation location	Diameter(mm)	Tightening torque(Nm)
DSK	/	Install the shielded wire directly on the bus bar	2-5	0.4

L/N/PE Terminal Block



■ Development

- Use with matching bus bars, suitable for switch cabinets and control equipment

Technical Data				
	DKG4	DKG16	DKG35	
Rated voltage(V)	300	300	300	
Rated current(A)	32	76	125	
Maximum load current(A)	41	76	125	
Thread	M4	M5	M6	
Tightening torque(N.m)	1.5-1.8	2.5-3	3.2-3.7	
Rated cross section(mm ²)	4	16	35	
Stripping length(mm)	16	16	16	
Wiring capacity	Solid	0.5-6	1.5-16	2.5-35
	Stranded	0.5-4	1.5-16	2.5-35
	Ferrule with/without plastic sleeve	0.5-6	1.5-16	2.5-35
General parameters				
Insulation Materials	PA			
Flammability rating, acc.to UL 94	V2			

Wire Slot



■ Development

- Provide the best solution for in-cabinet wiring

Technical Data		
Marking material	PC/ABS	
Temperature range(*C)	-40~90	
Flammability rating, acc.to UL 94	V0	
Ingredient	Halogen Free	
Material Data		
Description: Wire slot, 2 meters length		
Type	Order NO.	Specification
WD-ZH	/	1 bar= 2m

Customized

Marker customization

DEGSON markers (ZB, ZK, WB series), can match the DIN Rail terminal blocks, clearly identify the wiring, can customize the color and marking content on request, realize the flexible marking of the DIN Rail terminal blocks, you can contact the sales staff if you have relevant requirements.




DIN Rail terminal blocks customization

DEGSON DIN Rail terminal blocks, which can flexibly realize stable connection of on-site circuits, and can customize product color, printing, and printing color according to the actual needs of customers. There are 9 common colors to choose from. Can also make minor modifications of products on request, flexibly match on-site needs, please contact sales personnel if you have relevant needs.

1		Grey
2		Blue
3		Black
4		Green
5		Orange
6		Red
7		Transparent
8		Yellow
9		White
C		Yellow Green Mixed Color

The product name Y represents all colors alone,
When the product name contains RE and Y, it means yellow and green

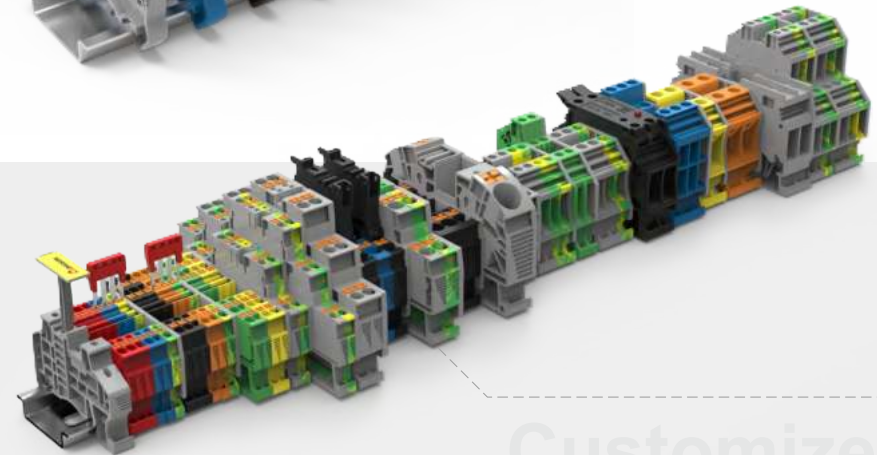


Customized

Customized

Drawer Terminal Block

Feature

- Push-in connection technology, convenient and efficient connection
- New and unique structure design, 45° input and 90° transfer, save installation space
- Modular output structure, easy to operate
- The main body and drawer base are assembled by modules splicing
- Spring limit structure with independent innovation can make sure connection stability
- 4 fixing holes on both sides

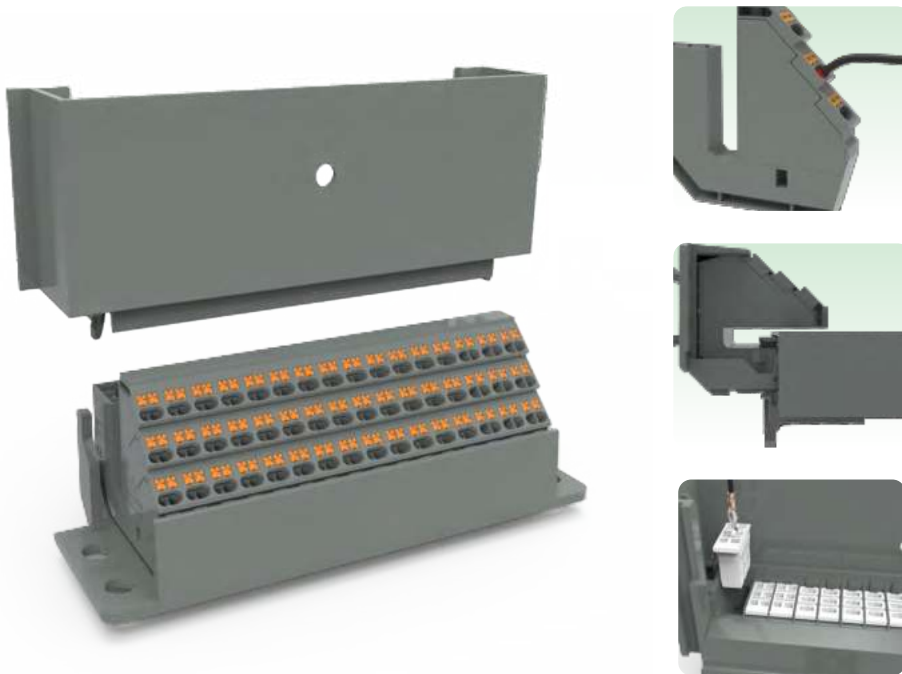

Customized

Push-in connection technology

Drawer Terminal Block



DS2.5PH-16P

DS2.5PH-24P

CE ENEC RoHS REACH

Dimensions									
Pitch	mm	10&11				10&11			
Electrical Data		IEC61984				IEC61984			
Pollution degree		2	2	3	UL1059	2	2	3	UL1059
Overvoltage category		II	III	III		II	III	III	
Rated voltage	V	630	320	250	300	630	320	250	300
Rated current	A	20				20			
Wire range	mm ² /AWG	0.2-2.5				0.2-2.5			
Rated surge voltage	KV	4				4			
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-2.5	0.2-2.5	0.2-1.5	0.2-1.5	0.2-2.5	0.2-2.5	0.2-1.5	0.2-1.5
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	—	—	—	—	—
General information									
Insulation material/Flammability rating(according to UL 94)		PA/V0 PC/V2				PA/V0 PC/V2			
Operation temperature		℃ (°F)				-40(-40)~80(176)			
Stripping length		mm				14			
Color		Gray (customization demand is available)				Gray (customization demand is available)			
Slotted screwdriver size (Blade thickness x Width)		mm				0.6x3.5			
loop number		57				84			

Customized

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS1.5-SD

CE ENEC RoHS REACH

Order NO.		11030000071			
Width/Length/Height(NS35/7.5&NS35/15)		mm4/42.5/38(45.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	800		600	
Rated current	A	18		10	
Rated cross section	mm²/AWG	0.2-1.5		28-16	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-1.5	0.2-1.5	0.2-1.5	0.2-1
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)			
Stripping length	mm	8-9			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	0.4x2.5			
Adjacent jumper (2P)		/			
Alternate jumper (2P)		/			
Staggered jumper (2P)		/			
End cover		D-WS1.5-SD			
Partition plate		/			
Top marker		/			
Side marker		ZB4 / WB4			
Warning cover		EEA1.5			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

Customized

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS2.5-SD

CE ENEC RoHS REACH



WS2.5-SD-PE

CE ENEC RoHS REACH

Order NO.		11030000195				11030000196									
Width/Length/Height(NS35/7.5&NS35/15)		mm		5/42.5/38(45.5)				5/42.5/38(45.5)							
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059							
Rated voltage		V		800		600		/		/					
Rated current		A		24		15		/		/					
Rated cross section		mm²/AWG		0.2-2.5		28-12		0.2-2.5		28-12					
Connection capacity		Solid		Stranded		Ferrule (with and without plastic sleeve)		Solid		Stranded		Ferrule (with and without plastic sleeve)			
1 conductor		mm²		0.2-2.5		0.2-2.5		0.2-2.5		0.2-1.5		0.2-2.5		0.2-1.5	
2 flexible conductors with a TWIN ferrule		mm²		—		—		0.5		—		—		0.5	
General Information															
Insulation material/Flammability rating (according to UL 94)				PA/V0				PA/V0							
Operation temperatures				°C (°F)				-40(-40)~105(221)						-40(-40)~105(221)	
Stripping length				mm				8-9						8-9	
Color				Grey, Red, Blue (please contact sales for other color requirements)						Green-yellow					
Accessories															
Ferrule				/						/					
Slotted screwdriver size (Blade thickness x Width)				mm		0.5x3.5						0.5x3.5			
Adjacent jumper (2P)						WFA2.5						/			
Alternate jumper (2P)						WFB2.5						/			
Staggered jumper (2P)						WFC2.5-2 WFC2.5-6		WFC2.5-3 WFC2.5-7		WFC2.5-4 WFC2.5-8		WFC2.5-5		/	
End cover						D-WS2.5-SD						D-WS2.5-SD			
Partition plate				/						/					
Top marker						ZB5 / WB5						ZB5 / WB5			
Side marker						DEK5						DEK5			
Warning cover						EEA2.5						EEA2.5			
Terminal strip marker support						DLM2 / KLM3-20x8 / KLM3-44x8						DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp						E-PC 1100A / E-WS N						E-PC 1100A / E-WS N			

Customized

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS4-SD

UL CE ENE RoHS REACH

Order NO.		11030000295			
Width/Length/Height(NS35/7.5&NS35/15)		mm6/41.8/40(47.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	800		600	
Rated current	A	32		20	
Rated cross section	mm ² /AWG	0.2-4		28-12	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-4	0.2-4	0.2-4	0.2-4
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)			
Stripping length	mm	11-12			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	0.5x3.5			
Adjacent jumper (2P)		WFA4			
Alternate jumper (2P)		WFB4			
Staggered jumper (2P)		/			
End cover		D-WS4-SD			
Partition plate		/			
Top marker		/			
Side marker		ZB6			
Warning cover		EEA4			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

Customized

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



WS6-SD

UL CE ENE RoHS REACH



WS6-SD-PE

CE ENE RoHS REACH

Order NO.		11030000315				11030000319			
Width/Length/Height(NS35/7.5&NS35/15) mm		8/46.5/44.5(52)				8/46.5/44.5(52)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	800		600		/		/	
Rated current	A	32		30		/		/	
Rated cross section	mm ² /AWG	0.2-6		24-10		0.2-6		24-10	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-6	0.2-6	0.2-6	0.2-6	0.2-6	0.2-6	0.2-6	0.2-6
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.5-2.5	—	—	—	0.5-2.5
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		℃ (°F)		-40(-40)~105(221)		-40(-40)~105(221)			
Stripping length		mm		9-10		9-10			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Green-yellow			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)		mm		0.8x5.5		0.8x5.5			
Adjacent jumper (2P)				WFA6		/			
Alternate jumper (2P)				WFB6		/			
Staggered jumper (2P)				/		/			
End cover				D-WS6-SD		D-WS6-SD			
Partition plate				/		/			
Top marker				/		/			
Side marker				ZB8		ZB8			
Warning cover				EEA6		EEA6			
Terminal strip marker support				DLM2 / KLM3-20x8 / KLM3-44x8		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp				E-PC 1100A / E-WS N		E-PC 1100A / E-WS N			

Customized

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



CE ENE RoHS REACH

CE ENE RoHS REACH

Order NO.		11030000021				11030000022			
Width/Length/Height(NS35/7.5&NS35/15) mm		10/52/49(56.5)				10/52/49(56.5)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Customized

Spring-cage connection technology

Feed-through, multi-conductor and ground terminal blocks



CE ENE RoHS REACH


CE ENE RoHS REACH

Order NO.		11030000086				11030000088			
Width/Length/Height(NS35/7.5&NS35/15) mm		12/58/52.6(60.1)				12/58/52.6(60.1)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage	V	800		600		/		/	
Rated current	A	76		66		/		/	
Rated cross section	mm²/AWG	0.2-16		24-6		0.2-16		24-6	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-16	0.2-16	0.2-16	0.2-10	0.2-16	0.2-16	0.2-16	0.2-10
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-6	—	—	—	0.5-6
General Information									
Insulation material/Flammability rating (according to UL 94)		PA/V0				PA/V0			
Operation temperatures		°C (°F)		-40(-40)~105(221)		-40(-40)~105(221)			
Stripping length		mm		16-17		16-17			
Color		Grey, Red, Blue (please contact sales for other color requirements)				Green-yellow			
Accessories									
Ferrule		/				/			
Slotted screwdriver size (Blade thickness x Width)		mm		0.8x5.5		0.8x5.5			
Adjacent jumper (2P)				WFA16		/			
Alternate jumper (2P)				WFB16		/			
Staggered jumper (2P)				/		/			
End cover				D-WS16-SD		D-WS16-SD			
Partition plate				/		/			
Top marker				ZT12		ZT12			
Side marker				/		/			
Warning cover				EEA16		EEA16			
Terminal strip marker support				DLM2 / KLM3-20x8 / KLM3-44x8		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp				E-PC 1100A / E-WS N		E-PC 1100A / E-WS N			

Customized

Spring-cage connection technology

Plug-in connection and its ground terminal blocks

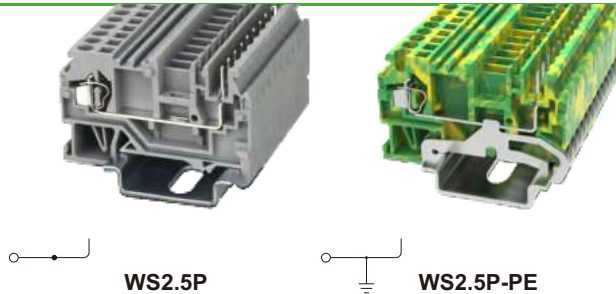

WS2.5P



WS2.5P-PE

CE ENEC RoHS REACH


CE ENEC RoHS REACH

Order NO.		11030000167				11030000185			
Width/Length/Height(NS35/7.5&NS35/15) mm		5/53/35.45(42.95)				5/53/35.45(42.95)			
Electrical Data		IEC IEC60947-7-1		UL UL1059		IEC IEC60947-7-2		UL UL1059	
Rated voltage									

Customized

Screw connection technology

Feed-through terminal blocks



PC10-105A(H)


CE ENEC RoHS REACH

Order NO.		11010000008			
Width/Length/Height(NS35/7.5&NS35/15) mm		10.2/48/48.5(56)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	1000		600	
Rated current	A	57		65	
Rated cross section	mm² /AWG	0.5-10		20-6	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm²	0.2-10	0.2-10	0.2-10	0.2-10
2 flexible conductors with a TWIN ferrule	mm²	—	—	—	0.5-6
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures	℃ (°F)	-40(-40)~105(221)			
Stripping length	mm	9-10			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque	~N.m(lb.in)(kgf.cm)	M4/1.2(10.5)(12.24)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)	mm	1x4			
Fixed bridge(10P)		FBR10-10			
Insertion bridge (2-10P)		EB2-10 EB3-10 EB10-10			
End cover		D-PC10-105A(H)			
Separating disk		TS-K			
Partition plate		ATP-PC			
Marker		ZB10			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

Customized

Screw connection technology

Feed-through terminal blocks



PC16-105A(H)

CE ENEC RoHS REACH

Order NO.		11010000167			
Width/Length/Height(NS35/7.5&NS35/15)		mm12.2/48.5/55.3(62.8)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage		V1000		600	
Rated current		A76		85	
Rated cross section		mm²/AWG1-16		16-4	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor		mm²0.2-16	0.2-16	0.2-16	0.2-16
2 flexible conductors with a TWIN ferrule		mm²—	—	—	0.5-6
General Information					
Insulation material/Flammability rating (according to UL 94)			PA/V0		
Operation temperatures			℃ (°F)-40(-40)~105(221)		
Stripping length			mm13-14		
Color			Grey, Red, Blue (please contact sales for other color requirements)		
Screw/Rated torque			-/N.m(lb.in)(kgf.cm)M5/3(27)(30)		
Accessories					
Ferrule			/		
Slotted screwdriver size (Blade thickness x Width)			mm1x4		
Fixed bridge(10P)			FBRI10-12		
Insertion bridge (2-10P)			EB10-12		
End cover			D-PC16-105A(H)		
Separating disk			TS-K		
Partition plate			ATP-PC		
Marker			ZT12		
Marker support			/		
Terminal strip marker support			DLM2 / KLM3-20x8 / KLM3-44x8		
End clamp			E-PC 1100A / E-WS N		

Customized

Screw connection technology

Feed-through terminal blocks



PC35-105A(H)


CE ENEC RoHS REACH

Order NO.		11010000064			
Width/Length/Height(NS35/7.5&NS35/15)		mm16.2/60/66.25(73.75)			
Electrical Data		IEC IEC60947-7-1		UL UL1059	
Rated voltage	V	1000		600	
Rated current	A	125		150	
Rated cross section	mm ² /AWG	0.5-35		14-1/0	
Connection capacity		Solid	Stranded	Ferrule (with and without plastic sleeve)	
1 conductor	mm ²	0.2-35	0.2-35	0.2-35	0.2-35
2 flexible conductors with a TWIN ferrule	mm ²	—	—	—	0.75-10
General Information					
Insulation material/Flammability rating (according to UL 94)		PA/V0			
Operation temperatures		℃ (°F)-40(-40)~105(221)			
Stripping length		mm15-16			
Color		Grey, Red, Blue (please contact sales for other color requirements)			
Screw/Rated torque		-/N.m(lb.in)(kgf.cm)M6/3.5(31)(35.7)			
Accessories					
Ferrule		/			
Slotted screwdriver size (Blade thickness x Width)		mm1x6.5			
Fixed bridge(10P)		FBRI12-16			
Insertion bridge (2-10P)		/			
End cover		/			
Separating disk		TS-K			
Partition plate		/			
Marker		ZT12			
Marker support		/			
Terminal strip marker support		DLM2 / KLM3-20x8 / KLM3-44x8			
End clamp		E-PC 1100A / E-WS N			

Customized Housing Solutions

Feature

- Customized enclosures, variety connection method
- Customized personalized products according to customer needs
- One-stop value-added service

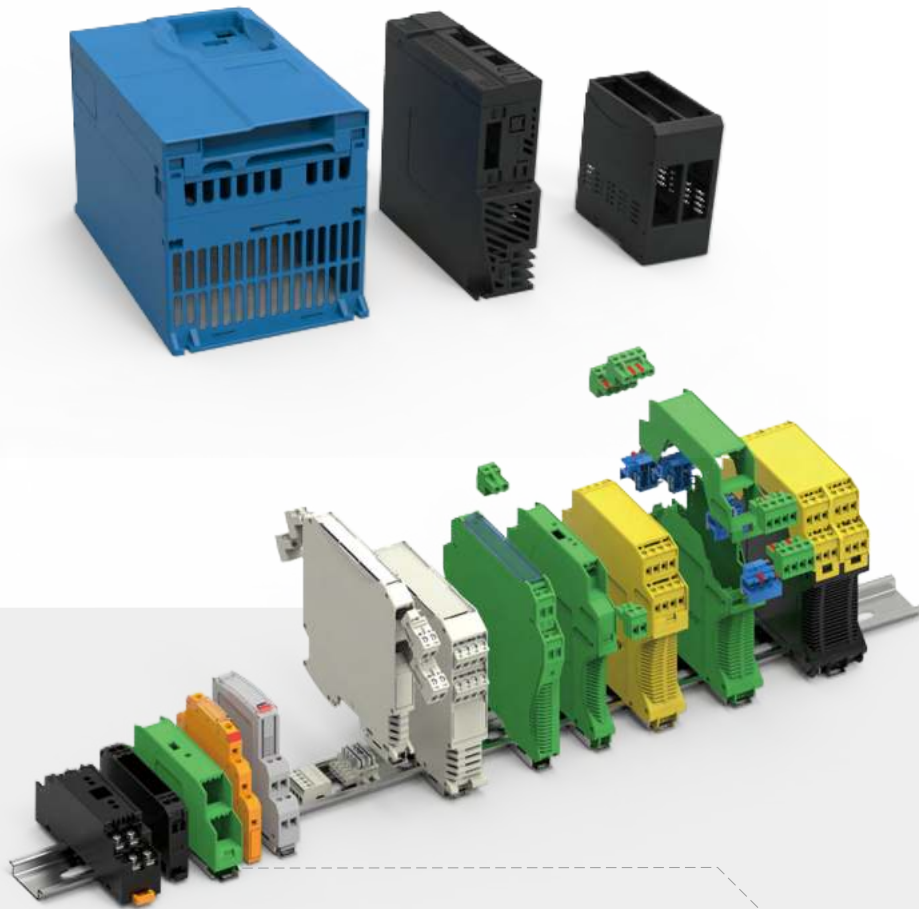

Customized Capabilities

- The professional team will provide all-round support from development, production, quality assurance to implementation.
- Early participation of suppliers, covering raw material selection, design for manufacturability (DFM), design of experiments (DOE), mold flow analysis, product prototyping, etc., shortening project time and reducing customer costs.
- High level and vertical integration, response to customer requirements quickly with it's own mold workshop and processing, manufacturing equipments.
- Whole-process integrated value-added services, providing supporting services such as printing, painting, hot-melting, assembly, etc.
- Approved by ISO9001:2015, ISO14001:2015, has a complete quality control system and measurement system.

Integrated Services

Provide high quality,safe and reliable connection solutions for global clients.




R&D

With more than 30 years' experience in terminal blocks and die-making , DEGSON has a team of experienced engineers. Our R&D department is equipped with advanced computer integrated manufacturing system (CIMS), which combines design, manufacturing and analysis into one system. We take part in international technical communication and cooperation activities frequently, and provide customers with complete technical solution on products development and manufacture. Our R&D team has a lot of experience with the manufacture of thousands of precise moulds; meanwhile, we are keeping on making innovations ,challenging the diversified high precision parts manufacture and trying to create advanced precision mould. Customized product design and 3D printing samples are available.



Technical discussion

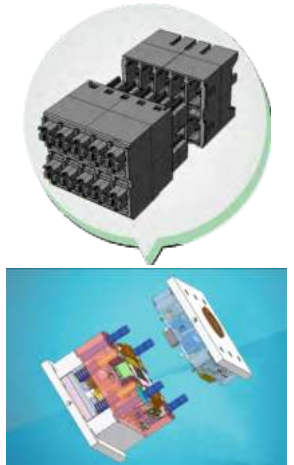

China, European Invention Patent Certificate



Chinese Utility Model Patent Certificate

Tooling Making

TOOLING-MAKING TECHNOLOGY AND ENGINEERING CAPABILITIES

Strong die-making ability, modular mould design, we can quickly finish the die-making and provide samples to our customers. DEGSON are well-equipped with advanced Japanese Sodick slow-feeding wire-cut machines, Japanese Mitsubishi EDM, grinding and milling machines etc., Nearly 100 sets of top machines for die-making. We have experienced engineers for tooling design, tooling assembly, tooling debugging. We produce more than 800 sets of all kinds of precision tooling per year.



Sodick low speed wire cutting machines(11 sets)



Medium speed wire cutting machines(11 sets)



Mitsubishi EDM machines(14 sets)



CNC machining centers(8 sets)

Tooling Quality Control

MOULD QUALITY CONTROL

We have more than a dozen set of precision testing equipments such as 3D measuring instrument, high-precision projector, high-precision height gauge. We have strict control of each process starting from material choosing, die processing, thermal treatment, machining to die assembly and die trial. Every tooling part has been strictly inspected before assembling.



High-precision milling machines (9 sets)



High precision surface grinding machines (30 sets)



Laser marking machine (2 sets)



Three coordinate measuring device (1 set)



High-precision projector (12 sets)

Precise Stamping

STAMPING&PUNCHING CAPACITY

Our company has 40 sets of high speed stamping & punching machines , with processing capacity ranging from 10 to110 tons. We use progressive die which allows all operations to be performed in one single die, high efficiency and precision. We can stamp various materials including, brass, phosphor bronze, beryllium copper, Alpacka , stainless steel and so on.



Turning machies

Automatic (spring) forming machines



Precise plastic injection machines

Precise high speed stamping machines

Automatic Manufacturing, Production

45 engineers responsible for automatic equipments hardware and software , fully independent automation equipments development.



Equipments R&D

Hardware

Software



Automatic assembly accounts for 80% of our production, with nearly 300 sets equipments to improve product consistency, automatic inspection and fast delivery.




Manual assembly lines to meet customer diversified customized requirements.

EV Charger automatic assembly lines.

Testing standard of DIN Rail terminal blocks

Quality Core Factors

The quality core factors coming from different industries and fields are important standards and specifications for product and process control

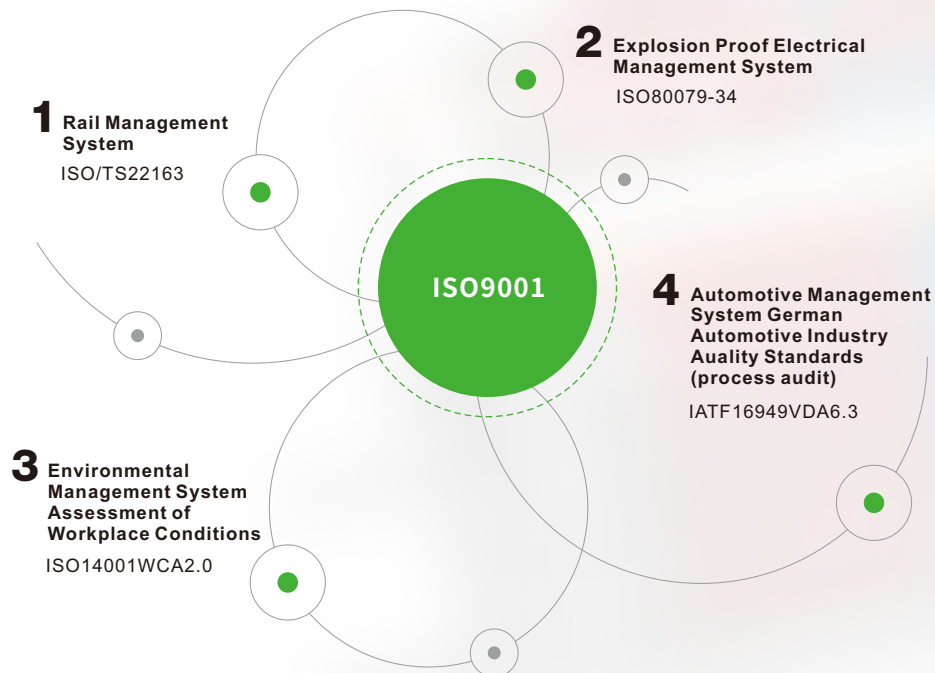

Certification Bodies And Safety Signs

Product certification is an internationally accepted product quality assurance model, and it is an inevitable choice to be in line with international standards to improve product credibility.



Certification For Special Fields

DIN-rail terminal blocks have passed tests that require more than basic standards and are therefore suitable for use in a variety of industries, including electricity, rail, process control, chemical, petrochemical, and shipbuilding

Electricity

Consistent confirmation by a nationally recognized professional laboratory for electricity feild



Rail Transit

ISO/TS22163 quality system requires that product performance conforms to IEC61373, IEC60068-2-27 anti-vibration shock requirement, EN45545-2, R22, R23 requirements, and VOC environmental requirements



Petroleum & Chemical

ISO80079-34 Explosion Proof Electrical Management System requires products must meet the certification requirements of IECEx, ATEX, 3C



IECEx,ATEX and 3C: Globally Applicable Explosion Proof Standards

DEGSON's terminal blocks have obtained the IECEx and ATEX certificates issued by the EU-authorized test center (TI, CQM) based on the IEC/EN60079-7 standard, which can meet the requirements of increased safety Ex eb or Ex ec protection requirements, suitable for installation in the wiring space of explosion-proof zone 2, especially explosion-proof zone 1

Increased safety (Ex eb) terminal blocks can be divided into the following categories

- Push-in DS Series Din Tail Terminal Blocks
- Screw PC/DC Series Din Tail Terminal Blocks
- Spring cage WS Series Din Tail Terminal Blocks
- Mini spring cage WS Series Din Tail Terminal Blocks

Increased safety (Ex ec) type terminals, suitable for explosion-proof zone 2, can be divided into the following categories

- Push-in DS Series Din Tail Terminal Blocks
- Screw PC/DC Series Din Tail Terminal Blocks
- Fuse din rial terminal blocks
- Test disconnect din rial terminal blocks

The above technical parameters in accordance with IEC/EN 60079

Marking according to ATEX Directive 2014/34/EU

Manufacturer or trademark	
Certification body number	NB1354
Device group	II
Device category	2
Operating environment (°C)	-55~110
Gas	G

Labeled according to IEC/EN 60079-0 and IEC/EN 60079-7 for safety improvement

Manufacturer or trademark	
Model description	DS,PC,WS,DC
Explosion Proof Abbreviation	Ex
Type of protection	eb , ec
Device group	II
Device Protection Level	Gb
Certification Body ID	CQM
ATEX certification number	Issued in July 2022
IECEx certification number	Issued in July 2022




IECEX, ATEX and 3C: Globally Applicable Explosion Protection Standards

Din Rail Terminal Blocks Type Test Perform the following tests

- Type testing according to IEC 60947-7-1/-2
- Clearance and creepage test and insulation test
- Aging test
 - 1) Store at 95°C and 95% humidity for 14 days (336H)
 - 2) A further 14 days (336H) test is carried out under the condition that the dry heat condition reaches the TI value of the insulating material
 - 3) Store at -65°C for 24 hours followed by wire pull test
- Temperature-rise test

At 1.1 times the rated current, the temperature rise does not exceed 40K. These terminal blocks are fully tested in accordance with IEC/EN 60079 during factory processing, including insulation test

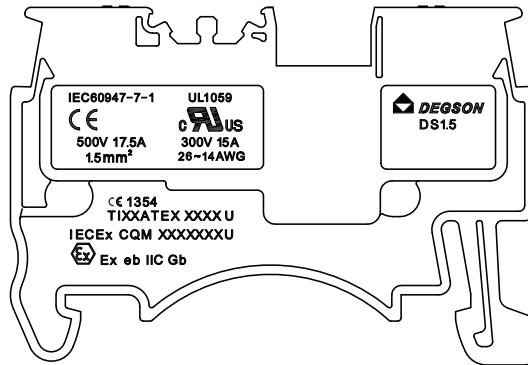

Terminal blocks components etc for use in explosion-proof areas must be marked as shown picture



Certificate indicates that the test was performed by the relevant accreditation body

IEC60947-7-1/-2 Wiring Capacity

The design of the wire terminal must ensure that the wire of the rated cross-section can be reliably connected within the range of the rated wiring capacity. Available in Metric (mm²) or American (AWG)

Rated cross-sectional area = maximum cross-sectional area value of various connectable conductors (flexible, single-strand, and multi-strand), based on which specific thermal, mechanical, and electrical requirements are based



Definition of rated wiring capacity: maximum and minimum cross-sectional area (at least two grades difference) and the number of connectable wires, rail terminals are designed according to this wiring capacity

During the test, din rail terminal blocks connects conductors of rated cross-section within the rated wiring capacity. Alternatively, the nominal cross section can also be verified with a plug gauge (see attached drawing)

Wires and plug gauges must be capable of unrestricted insertion or access to the terminal

The rated cross section of DEGSON din rail terminals far exceeds the standard requirements. All series can be connected to conductors of rated cross section with ferrules and insulating sleeves due to rational design

Unit: mm

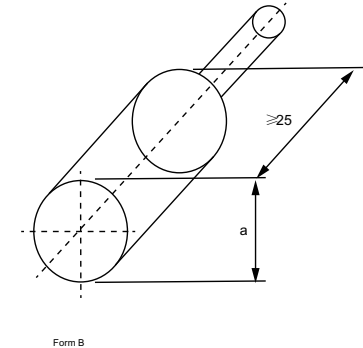
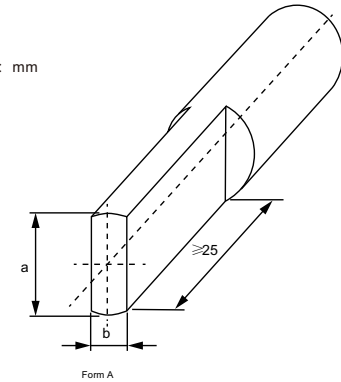


Type A and Type B plug gauges according to IEC 60947-1

IEC60947-7-1/-2 Mechanical Strength

Din Rail Terminal Torque Test

- Testing purposes:
Verify screw connection product can withstand mechanical strength when it is locked
- Testing method:
 - Spring structure: Rigid conductors of rated cross-section are inserted 5 times into the two connection points of the five terminals and removed from them
 - Screw structure: Tighten the connection point to the torque specified by the manufacturer and then test 5 times
- Judgement standard:
The connection points must be able to withstand repeated disconnections without appreciable damage. The voltage drop before and after the test shall not exceed 3.2mV, and the voltage after the test shall not exceed 1.5 times the value measured before the test
- Quality requirements:
DEGSON terminal blocks can be dismantled many times, and the connection quality is not affected in any way. Depending on the connection technology, the number of connections and disconnections can be used repeatedly.

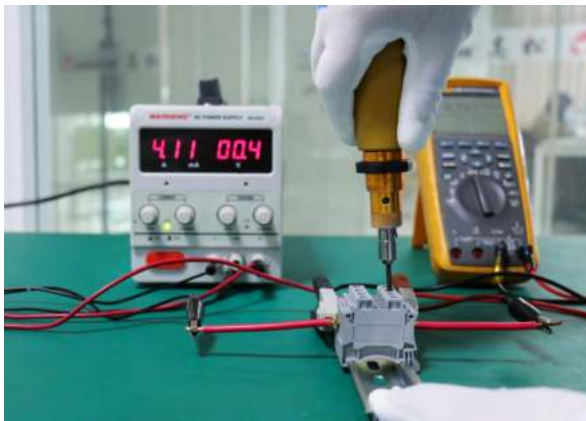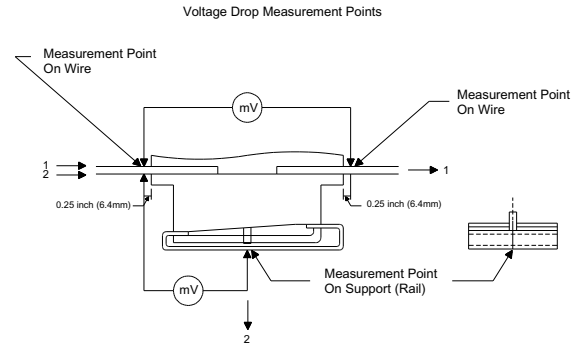

Din Rail Terminal Torque Test

IEC60947-7-1/-2 Mechanical Strength

Din Rail Terminal Blocks Rotational Pull Test

- Testing purposes:
Check the firmness of the connecting wire of the terminal block
- Testing method:
Conduct this test on rigid or flexible conductors of minimum, rated, and maximum cross-section. Connect the conductors to vertically fixed terminal blocks. Suspend a test weight at the end of the conductor, the weight of which corresponds to the conductor's cross-section. The wire passes through the opening 37.5mm away from the central axis of the turntable, 135 revolutions around the axis. After this is completed, perform a 1-minute wire-pull reinforcement test on the connection point
- Judgement standard:
Do not fall off from the wiring hole, the sample is not damaged
- Quality requirements:
DEGSON terminal blocks ensures that the conductors are protected in the crimping area, and neither the conductors nor the connection points will be damaged. The quality remains the same even after multiple crimping



Din Rail Terminal Blocks Rotational Pull Test



Din Rail Terminal Blocks Static Pull Test

Wire pull-out force complies with UL486E/IEC 60999/EN 60999																					
Wire diameter (AWG)	30	28	26	24	22	20	18	-	16	14	12	10	8	6	4	3	2	1	1/0	2/0	3/0
Area (mm ²)	0.05	0.08	0.13	0.2	0.32	0.52	0.82	-	1.3	2.1	3.3	5.3	8.4	13.3	21.2	26.7	33.6	42.4	53.5	67.4	85
Diameter (mm)	0.25	0.32	0.41	0.5	0.64	0.81	1.02	-	1.29	1.63	2.05	2.3	3.27	4.12	5.2	5.83	6.54	7.37	8.26	9.27	10.4
Pull force (N)	2.2	4.5	8.9	13	20	30	30	-	40	50	60	80	90	94	133	156	186	235	285	285	351
Wire diameter (mm ²)	-	-	-	0.2	-	0.5	0.75	1	1.5	2.5	4	6	10	16	25	-	35	-	50	70	95
Diameter (mm)	-	-	-	0.5	-	0.8	0.98	1.13	1.38	1.78	2.26	2.76	3.57	4.51	5.64	-	6.68	-	7.89	9.44	11
Pull force (N)	-	-	-	10	-	30	30	35	40	50	60	80	90	100	135	-	190	-	236	285	351

IEC60947-7-1/-2 Mechanical Strength

Test of din rail terminal blocks mounted on brackets

Testing purposes:

Verify that the terminal blocks can withstand a certain amount of force to prevent it from loosening from the bracket. Damage is also not allowed during test

Testing method:


Mount the terminal blocks on suitable brackets specified by the manufacturer. Clamp the 150mm long steel rod on the connection point, apply a certain tension and pressure (related to the cross section) on the connection position and the fixed position of the terminal, the length of the force arm is 100mm

Judgement standard:

During the test, the product must not loose from the mounting rail or bracket, and must not have any other damage

Quality requirements:

DEGSON terminal blocks ensures that the conductors are protected in the crimping area, and neither the conductors nor the terminals will be damaged. The quality remains the same even after multiple crimping

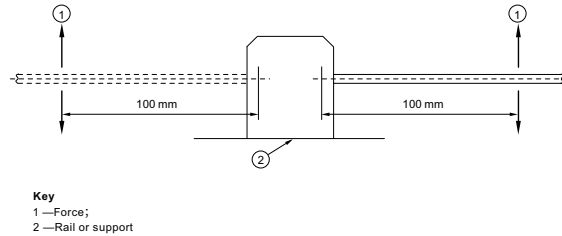

Wire diameter (mm ²)	0.2	0.5	0.75	1	1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240	300
Wire diameter (AWG/kcmil)	24	20	18	-	16	14	12	10	8	6	4	2	1/0	2/0	3/0	250	300	350	500	600
Force (N)				1				5			10				15				20	
Diameter (mm)				1				2.8			5.7				12.8				20.5	

IEC60947-7-1, UL1059 Air Clearances And Creepage Distances

Din rail terminal blocks clearance and creepage distance test

Testing purposes:

The distance of clearance and creepage must ensure efficient and durable electrical insulation

- Application
- Pollution degree
- Material Group

Test method:

1) Clearance: the shortest straight-line distance between two conductors in the air. The size of the electrical clearance must be based on the maximum possible impulse withstand voltage (see figure)

2) Creepage: the shortest distance between the two conductors on the surface of the insulator. The rated voltage, pollution degree and insulating material of the terminals have important influence on determining the minimum creepage distance (see figure)

Judgement standard:

Meet the standard range values determined by IEC60947 and UL1059

Quality requirements:

DEGSON terminal blocks are all in accordance with the requirements of IEC overvoltage class III and pollution degree 3; UL1059 terminals are usually designed according to the rated voltage in group B

Minimum acceptable spacings					
Application		Potential involved in volts	Minimum spacings in inches (mm) between uninsulated live parts of opposite polarity, and between an uninsulated live part and a grounded part including any mounting surface or exposed metal part		
			Through air		Over surface
A. Service - including dead-front switchboards, panelboards, service equipment, and the like	51-150	1/2	(12.7)	3/4	(19.1)
	151-300	3/4	(19.1)	1-1/4	(31.8)
	301-600	1	(25.4)	2	(50.8)
B. Commercial appliances, including business equipment, electronic data processing equipment, and the like	51-150	1/16 ^a	(1.6) ^a	1/16 ^a	(1.6) ^a
	151-300	3/32 ^a	(2.4) ^a	3/32 ^a	(2.4) ^a
	301-600	3/8	(9.5)	1/2	(12.7)
C. Industrial, general	51-150	1/8 ^a	(3.2) ^a	1/4	(6.4)
	151-300	1/4	(6.4)	3/8	(9.5)
D. Industrial, devices having limited ratings	301-600	3/8	(9.5)	1/2	(12.7)
	51-300	1/16 ^a	(1.6) ^a	1/8 ^a	(3.2) ^a
E. Terminal blocks rated 601-1500 V	301-600	3/16 ^a	(4.8) ^a	3/8	(9.5)
	601-1000	0.55	(14.0)	0.85	(21.6)
	1001-1500	0.70	(17.8)	1.20	(30.5)
F.	Industrial, devices using the alternative approach to spacings	51-1500	As Determined By Evaluation		

NOTES -


1) Astol, groove, or similar spacing, 0.013 inch (0.33mm) wide or less in the contour of insulating material is to be disregarded.

2) An air space of 0.013 inch (0.33mm) or less between a live part and an insulating surface is to be disregarded for the purpose of measuring over surface spacings.


a) The spacing between field wiring terminals of opposite polarity and the spacing between a field wiring terminal and a grounded dead metal part shall not be less than 1/4 inch (6.4mm) if short-circuiting or grounding of such terminals may result from projecting strands of wire. Examples of means that prevent stray wire strand contact include rating the terminal block for solid wire only, and design features such as recessed terminal pockets.

NOTES -

- 1) A slot, groove, or similar spacing, 0.013 inch (0.33mm) wide or less in the contour of insulating material is to be disregarded.
- 2) An air space of 0.013 inch (0.33mm) or less between a live part and an insulating surface is to be disregarded for the purpose of measuring over surface spacings.
- a The spacing between field wiring terminals of opposite polarity and the spacing between a field wiring terminal and a grounded dead metal part shall not be less than 1/4 inch (6.4mm) if short-circuiting or grounding of such terminals may result from projecting strands of wire. Examples of means that prevent stray wire strand contact include rating the terminal block for solid wire only, and design features such as recessed terminal pockets.

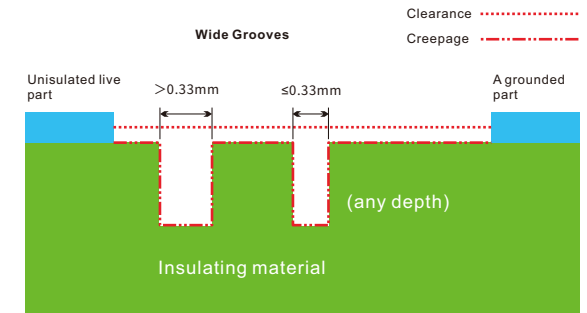

IEC60664-1 Methods of Determining Electrical Clearances

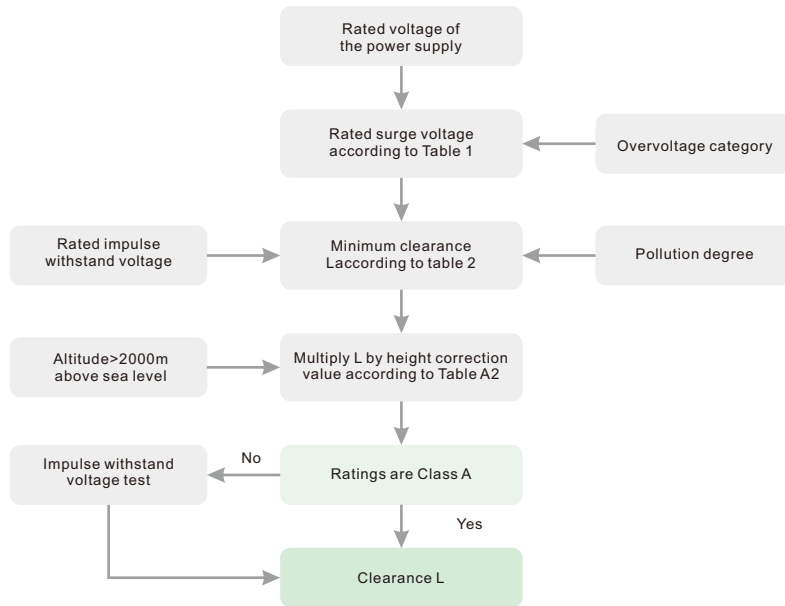**Rated surge voltage value of equipment directly powered by low-voltage grid**

Nominal voltage of the power supply system ^① (mains) as per IEC 60038 ^②		Conductor-neutral conductor voltage derived from the total nominal AC voltage or nominal DC voltage [V]	Rated surge voltage ^③ [V] Overvoltage category ^④			
Three phase [V]	Single phase [V]		I	II	III	IV
		50	330	500	800	1500
		100	500	800	1500	2500
	120 to 240	150	800	1500	2500	4000
230/400	277/480	300	1500	2500	4000	6000
400/690		600	2500	4000	6000	8000
1000		1000	4000	6000	8000	12000

- ① For the application of the existing offset low voltage grid and its rated voltage, please refer to
- ② Equipment with this rated surge voltage value according to IEC60364-4-443 can be used in the system
- ③ A slash (/) indicates a three-phase four-conductor system. The lower value represents the voltage between conductor and neutral, while the upper value represents the voltage between conductor and conductor. If only one value is specified, it represents the conductor-to-conductor voltage of a three-phase three-conductor system
- ④ For a description of overvoltage categories, please refer to the Electrical Insulation Characteristics chapter

IEC60664-1 Methods of Determining Electrical Clearances


Altitude correction value		
Altitude [m]	Normal air pressure [kPa]	Gap correction factor
2000	80.0	1.00
3000	70.0	1.14
4000	62.0	1.29
5000	54.0	1.48
6000	47.0	1.70
7000	41.0	1.95
8000	35.5	2.25
9000	30.5	2.62
10000	26.5	3.02
15000	12.0	6.67
20000	5.5	14.50

Minimum electrical clearance

Rated impulse withstand voltage value [kV]	Case A Non-uniform electric field (refer to 3.15)			Case B Uniform electric field (refer to 3.14)		
	Pollution degree ^④			Pollution degree ^④		
	1 [mm]	2 [mm]	3 [mm]	1 [mm]	2 [mm]	3 [mm]
0.33 ^⑤	0.01	0.2 ^{⑥⑦}	0.8 ^⑧	0.01	0.2 ^{⑥⑦}	0.8 ^⑧
0.40	0.02			0.02		
0.5 ^⑤	0.04			0.04		
0.60	0.06			0.06		
0.80 ^⑤	0.10			0.10		
1.0	0.15			0.15		
1.2	0.25	0.25	1.0	0.2	0.3	
1.5 ^⑤	0.5	0.5		0.3	0.3	
2.0	1.0	1.0	1.0	0.45	0.45	1.2
2.5 ^⑤	1.5	1.5	1.5	0.6	0.6	
3.0	2.0	2.0	2.0	0.8	0.8	
4.0 ^⑤	3	3	3	1.2	1.2	
5.0	4	4	4	1.5	1.5	1.5
6.0 ^⑤	5.5	5.5	5.5	2	2	2
8.0 ^⑤	8	8	8	3	3	3
10	11	11	11	3.5	3.5	3.5
12 ^⑤	14	14	14	4.5	4.5	4.5
15	18	18	18	5.5	5.5	5.5
20	25	25	25	8	8	8
25	33	33	33	10	10	10
30	40	40	40	12.5	12.5	12.5
40	60	60	60	17	17	17
50	75	75	75	22	22	22
60	90	90	90	27	27	27
80	130	130	130	35	35	35
100	170	170	170	45	45	45

- ① The impulse withstand voltage:
- For functional insulation, the maximum surge voltage of the clearance
- For basic insulation, the rated surge voltage value of equipment affected by direct or substantial transient overvoltages from the low-voltage grid
- For different basic insulation, the highest possible surge voltage in the circuit.
- ② Priority value
- ③ The values for pollution degree 1 apply to the PCB, but only within 0.04mm of the values specified in Table 4 are allowed
- ④ The minimum clearances for pollution degrees 2 and 3 are based on the corresponding creepage distances. This resistance decreases due to humidity
- ⑤ These values can be adjusted appropriately for components or circuits inside the equipment that are affected by surge voltages
- ⑥ The value corresponding to pollution degree 4 is equal to the value corresponding to pollution degree 3, except that the minimum electrical clearance is 1.6mm

IEC60664-1 Methods of Determining Electrical Clearances

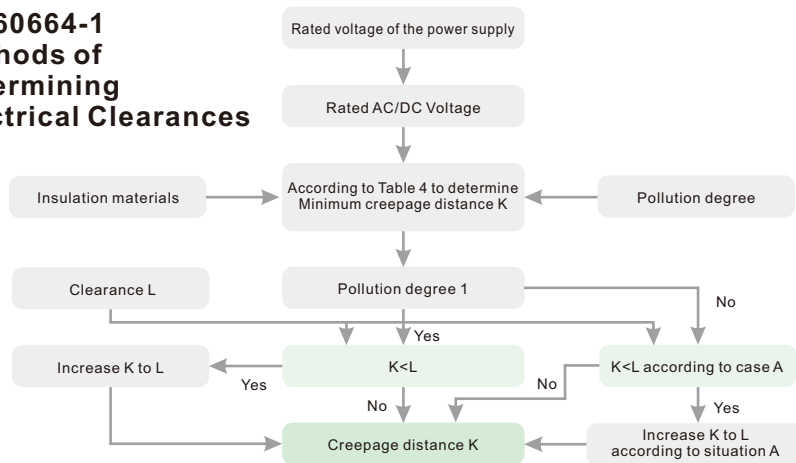

Creepage distance set to prevent faults caused by creepage

Voltage RMS ^①	Minimum creepage distance										
	PCB		Pollution degree								
	Pollution degree		1			2			3		
	All Insulation Material Categories	All insulating material classes except class III b	Insulation material category			Insulation material category			Insulation material category		
[V]	[mm]	[mm]	[mm]	[mm]	[mm]	I	II	III	I	II	III ^②
10	0.025	0.04	0.08			0.4	0.4	0.4	1.00	1.00	1.00
12.5	0.025	0.04	0.09			0.42	0.42	0.42	1.05	1.05	1.05
16	0.025	0.04	0.10			0.45	0.45	0.45	1.10	1.10	1.10
20	0.025	0.04	0.110			0.48	0.48	0.48	1.20	1.20	1.20
25	0.025	0.04	0.125			0.5	0.5	0.5	1.25	1.25	1.25
32	0.025	0.04	0.140			0.53	0.53	0.53	1.30	1.30	1.30
40	0.025	0.04	0.16			0.56	0.8	1.1	1.4	1.6	1.8
50	0.025	0.04	0.18			0.6	0.85	1.2	1.5	1.7	1.9
63	0.040	0.63	0.20			0.63	0.9	1.25	1.6	1.8	2.0
80	0.063	0.10	0.22			0.67	0.95	1.3	1.7	1.9	2.1
100	0.10	0.16	0.25			0.71	1.0	1.4	1.8	2.0	2.2
125	0.16	0.25	0.28			0.75	1.05	1.5	1.9	2.1	2.4
160	0.25	0.4	0.32			0.8	1.1	1.6	2.0	2.2	2.5
200	0.40	0.63	0.42			1.0	1.4	2.0	2.5	2.8	3.2
250	0.56	1.0	0.56			1.25	1.8	2.5	3.2	3.6	4.0
320	0.75	1.6	0.75			1.6	2.2	3.2	4.0	4.5	5.0
400	1.0	2.0	1.00			2.0	2.8	4.0	5.0	5.6	6.3
500	1.3	2.5	1.30			2.5	3.6	5.0	6.3	7.1	8.0
630	1.8	3.2	1.80			3.2	4.5	6.3	8.0	9	10.0
800	2.4	4.0	2.40			4.0	5.6	8.0	10.0	11	12.5
1000	3.2	5.0	3.20			5.0	7.1	10	12.5	14	16.0
1250			4.20			6.3	9	12.5	16	18	20
1600			5.60			8	11	16	20	22	25
2000			7.50			10	14	20	25	28	32
2500			10			12.5	18	25	32	36	40
3200			12.5			16	22	32	40	45	50
4000			16			20	28	40	50	56	63
5000			20			25	36	50	63	71	80
6300			25			32	45	63	80	90	100
8000			32			40	56	80	100	110	125
10000			40			50	71	100	125	140	160

① The voltage:

a For functional insulation, it is the working voltage.

b For basic and supplementary insulation of circuits supplied directly from the low-voltage mains, the voltage selected from Table 3a or 3b according to the rated voltage of the equipment or the rated insulation voltage of the equipment.

c For the basic and supplementary insulation of systems, equipment and internal circuits that are not directly powered by the power supply, the voltages within the rated parameters may be generated by systems, equipment or internal circuits that use rated voltages in various harsh operating environments. Highest true rms value.

② In the case of pollution degree 3, if the voltage is higher than 630V, the use of class III b insulating material is not recommended.

IEC60664-1 Specification for Insulation of Electrical Equipment for Low Voltage Systems

Electrical insulating properties:

Determination of clearances and creepage distances according to IEC60664-1

1) Characteristic values of overvoltages and overvoltage protective devices that may occur in relation to clearances

2) The working voltage related to the creepage distance, the direct surrounding environment that will reduce the insulation characteristics of the device, and the torque specified by the anti-pollution protection measures shall be tested again 5 times

Definition of terms

1) Overvoltage classes I to IV

- Overvoltage category IV:
Can be used for building installation junction points. Note: Devices in this class include electricity meters and major overcurrent protection devices
- Overvoltage category III:
The device can be used in fixed installations, especially in environments that require high device reliability and availability. NOTE: Such devices include fixed-mount switches and industrial equipment permanently connected to fixed-mount devices
- Overvoltage category II:
It is a power-consuming device powered by a fixed installation. Note: Such devices include household appliances, portable equipment, other household appliances and similar devices
- Overvoltage category I:
Can only be used in circuits with limited low-intensity transient overvoltages devices

2) Pollution degree 1 to 4

- Pollution degree 1:
No pollution, or only dry, non-conductive pollution and no effect occurs
- Pollution degree 2:
Only non-conductive pollution occurs. Occasional temporary conductivity occurs due to condensation effects must be considered
- Pollution degree 3:
Conductive pollution or dry non-conductive pollution occurs due to condensation
- Pollution degree 4:
Contamination leads to persistent electrical conductivity, e.g. through conductive dust, rain and snow

3) Pollution degree 1 to 4

- Insulating materials are divided into four groups according to CTI value, which is measured by A solution according to IEC60112 standard
- Insulation material group I: $600 \leq \text{CTI}$
- Insulation material group II: $400 \leq \text{CTI} < 600$
- Insulation material group III a: $175 \leq \text{CTI} < 400$
- Insulation material group III b: $100 \leq \text{CTI} < 175$
- Proof Tracking Index (PTI) is used to express the resistance to leakage current characteristics of insulating materials

IEC60947-7-1 UL1059 Electrical Performance test

Power frequency withstand voltage / impulse withstand voltage test of din rail terminal blocks

■ Testing purpose:

1) Power frequency withstand voltage verifies the insulation performance of the product under high voltage conditions, and at the same time verifies the creepage distance between the potentials of two adjacent terminal blocks, and between the terminal blocks and the DIN rail

2) Impulse withstand voltage test to prove whether there is a sufficiently large electrical gap between two adjacent potentials

■ Testing method:

1) Power frequency withstand voltage (IEC): the highest effective voltage value or DC voltage value that can continue to occur under the specified use conditions (as shown in the figure). Test voltage duration must exceed 60 seconds

2) Impulse withstand voltage (IEC): The test needs to be repeated 5 times, and the time interval is at least 1s. Tested separately for each polarity according to rated insulation voltage


■ Judgement standard:

1) Power frequency withstand voltage: There shall be no spark discharge or breakdown during the test. And the leakage current must be less than 0.5mA

2) Impulse withstand voltage: no insulation failure and no flashover during the test

■ Quality requirements:

DEGSON terminal blocks are rated for surge voltages between 6kV and 8kV. This effectively verifies the operational safety of the rated working voltage of the terminal block.

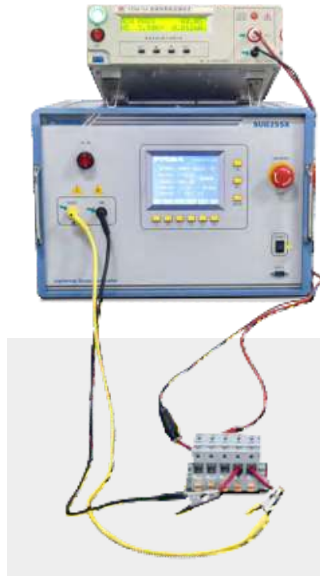

UL 1059

$U_i \leq 600 \text{ V}$:
Test voltage = $1000 \text{ V} + 2 \times$
Rated insulation voltage U_i
 $601 \text{ V} \sim 1500 \text{ V}$:
Test voltage = $2000 \text{ V} + 2.25 \times$
Rated insulation voltage U_i

Power frequency withstand voltage/
impulse withstand voltage test of din rail terminal blocks

**Table 12A-Dielectric test voltage
corresponding to the rated insulation voltage**

Rated insulation voltage U_i V	AC test voltage (r.m.s.) V	DC test voltage ^{b, c}
$U_i \leq 60$	1000	1415
$60 < U_i \leq 300$	1500	2120
$300 < U_i \leq 690$	1890	2670
$690 < U_i \leq 800$	2000	2830
$800 < U_i \leq 1000$	2200	3110
$1000 < U_i \leq 1500^a$	/	3820

a For d.c. only.

b Test voltage based on 4.1.2.3.1, third paragraph of IEC 60664-1.

c A direct current test voltage may be used only if an alternating test voltage cannot be applied. See also 3) b) ii) of 8.3.3.4.1.

Table 12-impulse withstand test voltages

Rated impulse withstand voltage U_{imp} KV	Test voltages and corresponding altitudes				
	$U_{1,250}$ KV				
	Sevel level	200m	500m	1000m	2000m
0.33	0.35	0.35	0.35	0.34	0.33
0.5	0.55	0.54	0.53	0.52	0.58
0.8	0.91	0.9	0.9	0.85	0.8
1.5	1.75	1.7	1.7	1.6	1.5
2.5	2.95	2.8	2.8	2.7	2.5
4.0	4.8	4.8	4.7	4.4	4.0
6.0	7.3	7.2	7.0	6.7	6.0
8.0	9.8	9.6	9.3	9.0	8.0
12.0	14.8	14.5	14	13.3	12

NOTE Table 12 uses the characteristics of homogeneous field, case B (see 2.5.62).

IEC60947-7-1 UL1059 Electrical Performance test

Din Rail terminal blocks Voltage-drop test

■ Testing purpose:

This electrical test determines the voltage drop on a terminal block (two terminal points) and contact quality

■ Testing method:


During the test, a direct test current corresponding to 0.1 times the current carrying capacity of the rated cross-section is applied to the terminal blocks, and the voltage drop is picked off at a distance of $\leq 10 \text{ mm}$ from the middle of the terminal point (see diagram)

■ Judgement standard:

At 20°C ambient temperature, the voltage drop across each terminal shall not exceed 3.2mV before and after the test, and shall not exceed 1.5 times the initial value before the test

■ Quality requirements:

DEGSON Takamatsu's Terminal Blocks Voltage Drop of Terminal Blocks Meets Industry Standards

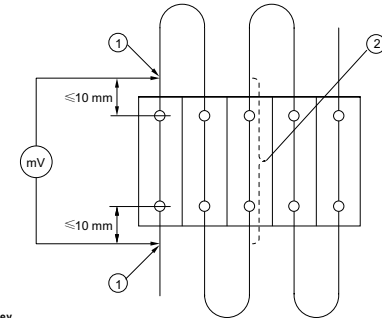

Key
1 Measuring point of voltage drop
2 Measuring of temperature

Figure 2 Arrangement for tests according to 8.4.5 and 8.4.7, and for the verification of voltage drop



Din Rail Terminal Blocks Voltage-drop Test

S(mm ²)	0.2	0.5	0.75	1	1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240	300	-	-
Current(A)	4	6	9	13.5	17.5	24	32	41	57	76	101	125	150	192	232	269	309	353	415	520	-	-
AWG/MCM	24	22	20	18	16	14	12	10	8	6	4	2	1	1/0	2/0	3/0	4/0	250	300	350	500	600
Current(A)	4	6	8	10	16	22	29	38	50	67	90	121	139	162	185	217	242	271	309	353	415	520

IEC 60947-7-1/-2 / UL 1059 / IEC 61984 Electrical Performance Test

Din Rail Terminal Blocks Temperature-rise Test

- Testing purpose:
Confirm that the product will not generate abnormal temperature under normal operating environment, which may cause possible fire hazard

- Testing method:

- 1) IEC60947-7-1

Install the 5 terminal blocks on the guide rail, as shown in the figure, use 1m ($\leq 10\text{mm}^2$) or 2m ($> 10\text{mm}^2$) wires in series, and load the carrying capacity current corresponding to the rated wire; multilayer wiring terminal blocks and test disconnect terminal blocks are allowed reduce test current according to the manufacturer's requirements

- 2) IEC60947-7-2

Group a): Arrange 5 pieces of mutually insulated protective body terminal blocks adjacent to each other, without bracket installation, and measure the temperature rise on the middle piece of terminal (10mm^2 , $L=1\text{m}$; $> 10\text{mm}^2$, $L=2\text{m}$)
Group b): Install 5 pieces of protective conductor terminal blocks on a non-steel bracket, connect the two outer protective conductor terminals through the bracket, and measure the temperature rise on the two outer terminal blocks (10mm^2 , $L=1\text{m}$; $> 10\text{mm}^2$, $L=2\text{m}$)

- 3) IEC61984


Products of various positions (eg 5 positions, 10 positions.....) are connected using loops of 0.5m or 1m long conductors with a maximum cross-section. Load the test current according to the decay curve (basic curve)

- 4) UL1059


Take at least 3 terminal blocks and mount them horizontally (next to each other). The measured ambient temperature is 25°C , the maximum allowable temperature rise is 30 K (measure as close as possible to the wiring point)



Din Rail Terminal Blocks Temperature-rise Test



a) Group Temperature-rise test layout



b) Group Temperature-rise test layout

- Judgement standard:

- 1) IEC60947-7-1

- 2) IEC60947-7-2

The maximum permissible temperature rise of the terminal block is 45 K. Before and after the Temperature-rise test, the voltage drop test of the five terminal blocks is required

- 3) IEC61984

The temperature rise on the terminal contacts must not exceed the upper material temperature

- 4) UL1059

The maximum allowable temperature rise of the terminal is 30K (measured as close as possible to the wiring position)

- Quality requirements:

The terminal blocks are made of high-quality contact materials, so the temperature rise values of the terminal blocks with various connection technologies are all lower than the requirements of the specified standard

IEC 60947-7-1/-2 / UL 1059 / IEC 61984 Electrical Performance Test

DIN Rail Terminal Current Carrying Capacity Curve Complies with IEC/EN 60512-5-2 standard

- Testing purpose:

When choosing a connector, pay attention to the structural requirements of the connector and the size of the current carrying capacity

- Testing method:

The current carrying capacity depends on the cross-sectional area of the connected wires, the ambient temperature, the number of poles carrying current at one time, the internal resistance of the connector, the printed circuit board layout, and the material of the connector. The relationship between current, ambient temperature and temperature rise (up to the limit operating temperature of the connector) can be displayed according to the IEC current carrying capacity curve (decay curve) (see schematic diagram)


- Judgement standard:

The connector can operate normally within the limit of operating temperature (sum of self-heating and ambient temperature)

- Quality requirement:

DEGSON terminal blocks are made of high-quality contact materials and shell materials to improve the current carrying capacity of the connector

DS6 Derating diagram

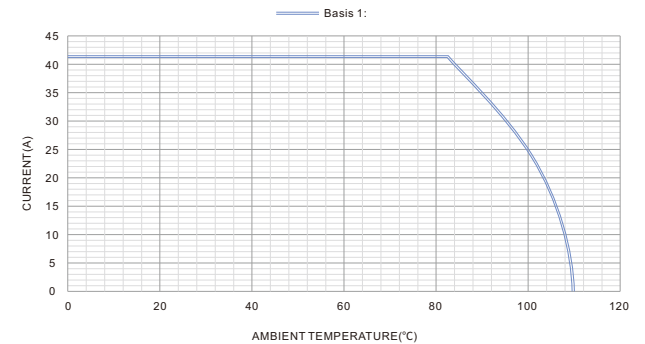

Current-carrying Capacity Curve Diagram Of Rail Terminals (attenuation Curve)

The function of the current-carrying capacity curves (according to IEC/EN 60512-5-2) can be explained with the help of the corresponding graphs of the DS series: for example, in this graph, each pole of a 4-position connector carries 41A Current and connects 4mm^2 wire, the maximum allowable ambient temperature is 80°C . If the temperature is higher, the current will be reduced. For example, when the ambient temperature is 100°C , the carrying current will be reduced to 20A.

IEC 60947-7-1/-2 / UL 1059 / IEC 61984 Electrical Performance Test

Instantaneous Impulse Current Strength Test of Din Rail Terminal Blocks

Testing purpose:

The terminals must also withstand the transient short-circuit current without damage before the protective device disconnects the current

Testing method:


Mount the terminal with the conductor of rated cross-section on the rail, load current = 120 A/mm^2 (current $\times$ rated cross-section) for 1 second. The test process is carried out in three rounds (see schematic diagram)

Judgement standard:

After the test is completed, the components are undamaged and can be used further, which shows test meets requirement. The terminal blocks must pass the voltage drop test before and after this test. The voltage drop on each terminal block before and after the test shall not exceed 3.2 mV , and shall not exceed 1.5 times the initial value before the test after the test


Quality requirements:

DEGSON terminal blocks are made of high-quality contact materials and shell materials to improve the current impact capability of the connector

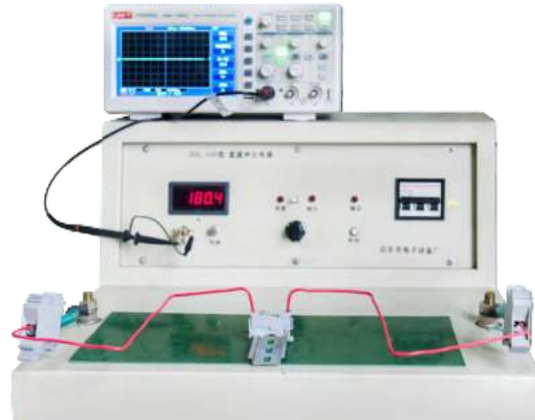

Instantaneous Impulse Current Strength Test of Din Rail Terminal Blocks

The instantaneous current carrying capacity of the 95 mm^2 high current terminal block is 11400 A .

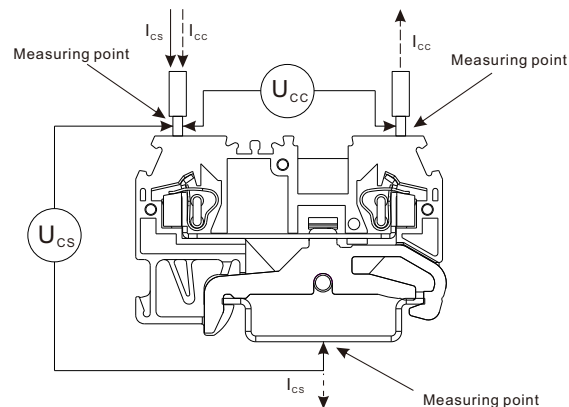

In this test, the protective earth terminal block can withstand a secondary current of 120 A/mm^2 for a duration of 1s, with an interval of at least 6 minutes between the two times. The voltage drop value is a crucial factor for the product to pass this experiment (limit value and continuous measurement value).

IEC 60947-7-1/-2 / UL 1059 Environmental Performance Test

Din Rail Terminal blocks Aging Cycle Test(spring cage type)

Testing purpose:

In order to prolong the life cycle of the terminal block, the test of the connection quality by simulating the aging process

Testing method:

1) IEC: Install the five terminal blocks horizontally on the guide rail, and use wires of rated cross-section in series, and measure the voltage drop across each terminal block. Connect in series with a minimum length of 300 mm wire. The lower and upper temperature limits in the aging box were set to 20°C and $T+45^\circ \text{C}$, respectively. The ramp-up phase continued for 10 minutes after reaching the maximum temperature $T+45^\circ \text{C}$. The power is then disconnected, and the voltage drop is measured once after cooling to about 20°C , or after 24 cycles. There are 192 cycles in the whole testing process

2) UL: continuous use of 1.5 times the rated current, 3.5 hours of power on, 0.5 hours of power off, 84 cycles (cycles) of power on and off

Judgement standard:

1) IEC: The initial voltage drop shall not exceed 3.2 mV . The voltage drop during and after the test shall not exceed 4.8 mV and shall not exceed 1.5 times the measured value after 24 cycles


2) UL: The maximum temperature rise value of the 84th cycle is not greater than the maximum temperature rise value of the first cycle by 5 degrees

Quality requirements:


DEGSON terminal blocks could maintain strong durability even in harsh working environments. Both plastic and metal parts have a long service life.



Screwless Terminal Blocks Temperature Cyclic Aging Test System

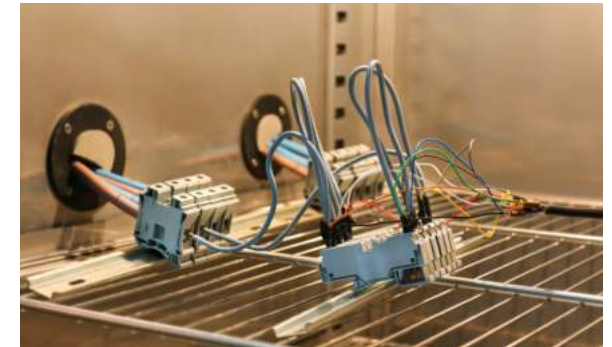

Aging Cycle Test

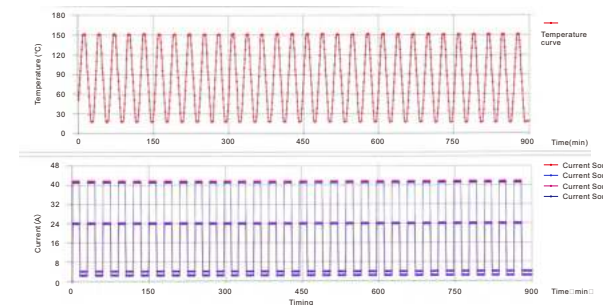

GB/T 2423.16-2008/ IEC 60068-2-10:2005

Mold test

■ Testing purpose:

In order to test the influence of mold growth on electronic products and the degree of mold growth on electrical performance, it is necessary to conduct mold tests on terminals

■ Testing method:

The strains and freeze-dried spores should be obtained from an approved collection of fungal strains, with an experimental severity level of 2 and a culture period of 56 days.

Prepare the following two sets of samples

The first group of spore suspension inoculated and cultured samples;
Group 2 Negative control samples sprayed or immersed in sterile distilled water according to the inoculation method of Group 1, incubated at the same temperature and humidity, but in a sterile environment.

Oxygen was supplied to the vessel every 7 days until the end of the incubation period.

■ Judgement standard:

Grade 2a: Sparse mold growth is seen with the naked eye or scattered and local mold growth is seen under the microscope, and the mold growth area does not exceed 5% of the test area

■ Quality requirements:

DEGSON Takamatsu's terminals can meet the mold test requirements 2a standard



Mold Test Chamber

IEC 60947-7-1/-2 Material Property Testing

Din Rail Terminal Blocks Comparative Tracking Index(CTI) according to IEC 60112

■ Testing purpose:

Humidity and contamination can affect the creepage distance of plastic surfaces. The CTI value of plastic refers to the prevention of leakage caused by creepage gaps

■ Testing method:

Place two platinum electrodes with a distance of 4mm on a plastic plate of (40 mm x 40 mm x 3 mm), use 0.1% ammonium chloride solution, apply a standard test voltage to the two electrodes, every 30 seconds, test droplets Drop once, a total of 50 drops



■ Judgement standard:

The following judgments are unqualified:

1. Sample surface current $\geq 0.5A$ delay 2s
2. The surface current of the sample is less than 0.5A, but it catches fire
3. After 50 drops of the solution, the sample is dripped through

■ Quality requirement:

Plastic materials used by DEGSON meets the highest test voltage category, CTI can reach 600V

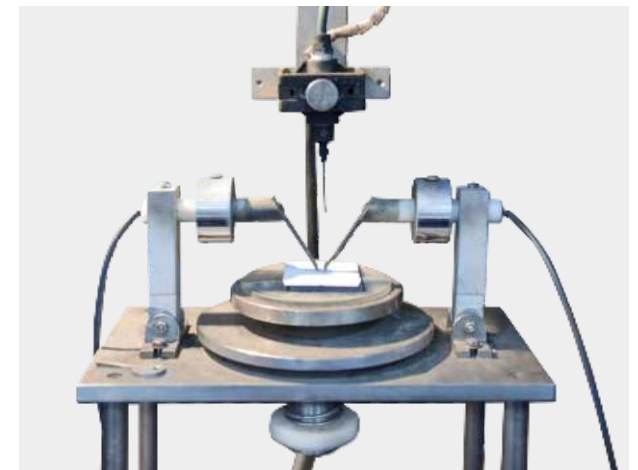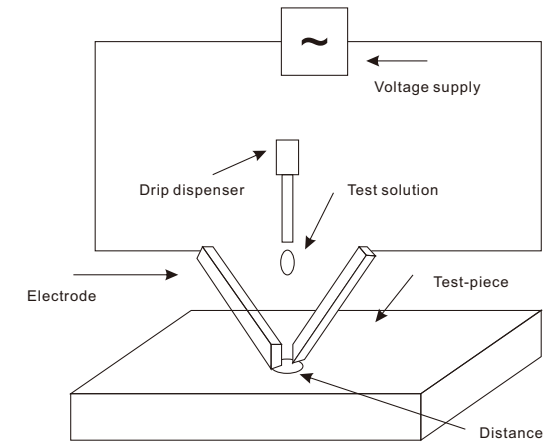


Din Rail Terminal Blocks Comparative Tracking Test


IEC 60947-7-1/-2 Material Property Testing

Din Rail Terminal Block Glow Wire Compliant to IEC 60695-2- 11/-12

- Testing purpose:
Under overload conditions, conductive metal parts may experience significant heat generation. This extra heat can have an effect on the plastic housing. Glow wire test simulates fire hazard to electronic components
- Testing method:
In the glow wire test, the glow wire is heated to a specified temperature (750°C, 850°C or 960°C). As shown in the figure, use a pushing force of 1N, and vertically touch the glow wire to the thinnest part of the test piece shell and heat for 30s
- Judgement standard:
No flame or burning process occurred during the test
 - The flame or red heat of the specimen is extinguished within 30 seconds after the glow wire is removed;
 - Burning droplets cannot ignite the silk paper under the test piece
- Quality requirement:
The nylon used in the housing material of DEGSON Takamatsu terminals can meet the requirements of UL yellow card

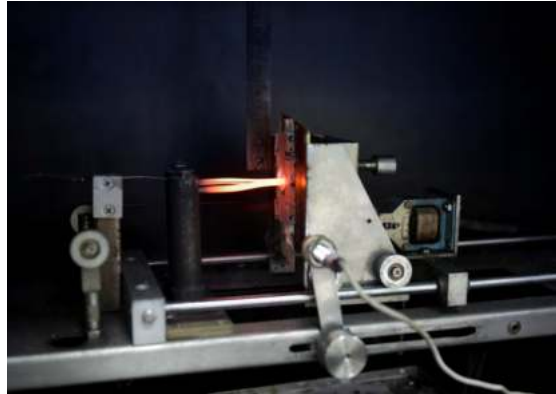

DIN Rail Terminal Block Glow Wire In Testing

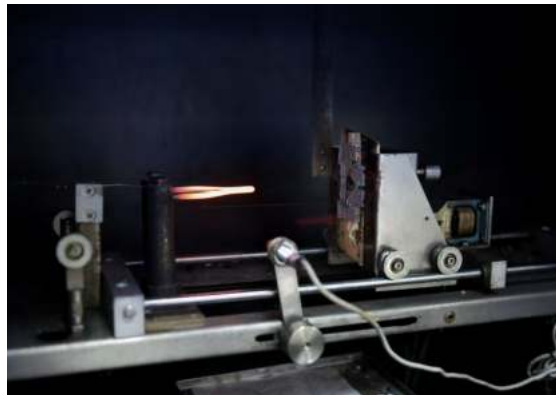

DIN Rail Terminal Block Glow Wire After Testing


IEC 60947-7-1/-2 Material Property Testing

Din Rail terminal block needle flame test compliant to IEC 60695-2-2

- Testing purpose:
In the fire test, an external fire source is used to directly approach the test component, and it acts directly on the component from the outside to simulate the flame retardant performance of the component.
- Testing method:
During the test, an open flame generated by butane gas is applied to an outside or surface of the test piece at an angle of 45° for 10 seconds. Then observe the test subject's reaction after being removed from the fire
- Judgement standard:
No flame or combustion process occurred during the test
 - After the flame is removed, the flame or red heat of the specimen is extinguished within 30 seconds;
 - Burning droplets cannot ignite the silk paper under the test piece
- Quality requirement:
DEGSON uses high-quality plastic materials and special construction, all terminals have passed the needle flame test



Needle Flame Tester

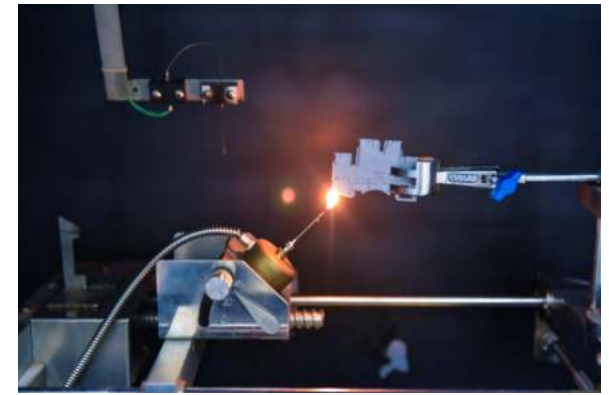


DIN Rail Terminal Block Needle Flame Test

IEC 60947-7-1/-2 Material Property Testing

Rail terminal flame retardant test conforms to UL94

- Testing purpose:
In fire tests, the flame retardant properties or burning behavior of materials
- Testing method:
After preconditioning, the test strips were clamped vertically and flame heated 2 times, each lasting 10 seconds. Record the length of time that each material burns to extinguish
- Quality requirements:
DEGSON terminal blocks use UL94 PA66 V0 plastic material

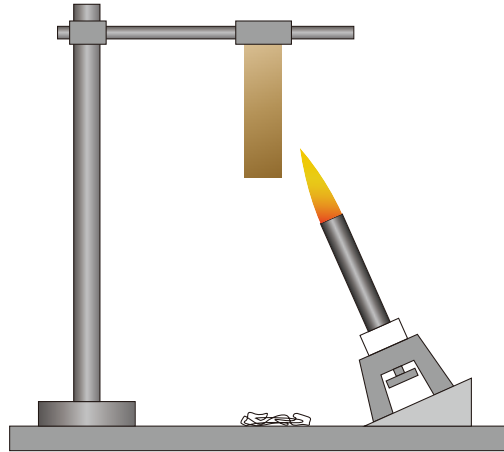

Rail Terminal Flame Retardant Test

Type	UL94 V0	UL94 V1	UL94 V2
Each flame's burning time	≤10 s	≤30 s	≤30 s
Total 10 times of flame's burning time	≤50 s	≤250 s	≤250 s
Second flame's burning time	≤30 s	≤60 s	≤60 s
Complete combustion	No	No	No
The cotton wool under the test sample is ignited	No	No	No


IEC 60068-2-11 Environmental Performance Test

Din Rail Terminal Block Salt Spray Corrosion Test

- Testing purpose:
In salt spray environment, technical components must be able to function continuously in aggressive environment. The air contains salt and high humidity, and the metal parts used are required to have strong corrosion resistance. According to the above standards, the impact on the marine climate is simulated
- Testing method:
Test subjects were placed in a test chamber and sprayed with 5% sodium chloride (NaCl; pH 6.5 - 7.2) for 96 hours at ambient conditions at 35°C
- Judgement standard:
Observe the appearance of the test object and conduct an electrical test on the resistance of the junction in order to verify the effect of the corrosion test on the junction
- Quality requirement:
DEGSON terminal blocks uses corrosion-resistant high-grade copper alloys to ensure that the contacts are not corroded in extreme environments



Salt Spray Test Chamber

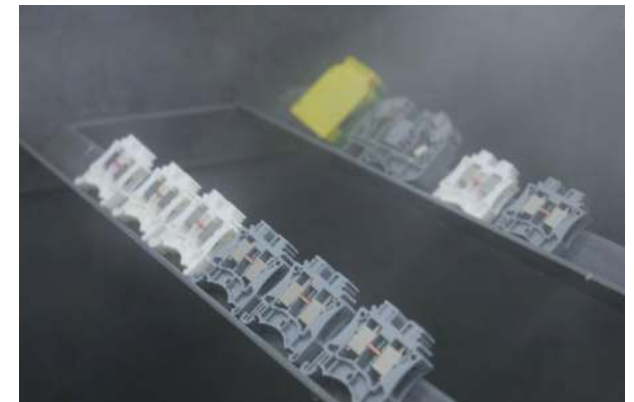

Din Rail Terminal Blocks Salt Spray Corrosion Test

Environmental Performance Test

Din Rail Terminal Blocks Temperature Cycling Test

- Testing purpose:**
 In process control, sharp temperature changes often occur near its cold and heat sources. This test verifies that the junction point guarantees long-lasting excellent connection quality, even when subjected to rapid temperature changes
- Testing method:**
 The 5 terminal blocks for connecting the rated cross-section conductors are mounted on the rail and subjected to temperature shock using a dual temperature control test. Set the temperature in the box to the upper limit temperature of the terminal blocks +105°C and the lower limit temperature -40°C respectively. The terminal blocks stays in each temperature control box for 12H. The temperature was cycled 5 times. After cooling to room temperature, the terminal blocks must also pass the voltage drop test
- Judgement standard:**
 After the test is completed, the parts are not damaged and can be used further, which shows test meets requirement
- Quality requirement:**
 DEGSON terminal blocks uses temperature-resistant nylon material to ensure well-balanced temperature characteristics in extreme environments



Din Rail Terminal Blocks Temperature Cycling Test



Din Rail Terminal Blocks Temperature Cycling Test

IEC 61373 / IEC 60068-2-6 Vibration Test (DIN EN 50155)

Din Rail Terminal Blocks Vibration Test

- Testing purpose:**
 In the rail industry, terminal blocks are subject to vibration and shock. In order to simulate the vibration experienced in actual use, the test object is subjected to a broadband noise and vibration test
- Testing method:**
 In the test frequency range: 5Hz to 150Hz. The equivalent value of acceleration can be up to 7.91m/s². The test piece must be tested for 5 hours in each of the three axis directions (X, Y, Z). During the testing process, in addition to vibration testing, it is necessary to monitor the electrical contacts, which increases the difficulty of testing.
- Judgement standard:**
 The contact resistance shall not be more than 1 μ s during vibration, and the contact resistance shall be measured before and after the test. After the test is completed, there shall be no damage that affects subsequent normal use
- Quality requirements:**
 The terminal blocks with different connection technologies provided by DEGSON have passed high standard vibration test



Vibration Testing Machine



Din Rail Terminal Blocks Vibration Test

IEC 61373 / IEC 60068-2-27 Shock Testing

Din Rail Terminal Blocks Shock Testing

- Testing purpose:
In the rail industry, terminal blocks are subject to vibration and shock. Detect and verify the ability of the joint to resist different shocks
- Testing method:
Three shocks applied in the positive and negative directions of the three coordinate axes (X, Y, Z). The simulated acceleration reaches 20g, the pulse duration is 11ms, and the (X, Y, Z) shocks 3 times in the forward and reverse directions, a total of 18 times
- Judgement standard:
During the test, the contact disconnection of more than 1μs shall not occur. After the test is completed, there shall be no damage that affects the subsequent normal use.
- Quality requirements:
DEGSON din rail terminals are all subjected to high-strength shocks and are suitable for occasions that are susceptible to strong shocks




Shock Testing Machine

IEC60529, EN50274 Protection Against Contact Test

Din rail terminal blocks touch protection test

- Testing purpose:
Electrical installations and systems must ensure a very high level of safety for service technicians. The voltage-free state of the affected low-voltage system or system parts up to AC 1000V and DC 1500V when working near live parts. To prevent electric shock, live parts must be protected from direct contact with covers or brackets
- Testing method:
When testing according to EN50274, the test probe exerts a force on the test object in the direction of operation
- Judgement standard:
For electrical contact between the test probe and live parts, do not use a test force of more than 10N to demonstrate touch-proof safety, and a test force of 50N to demonstrate "back of hand" safety
- Quality requirements:
DEGSON din rail terminal blocks meets the standard finger protection against contact requirements

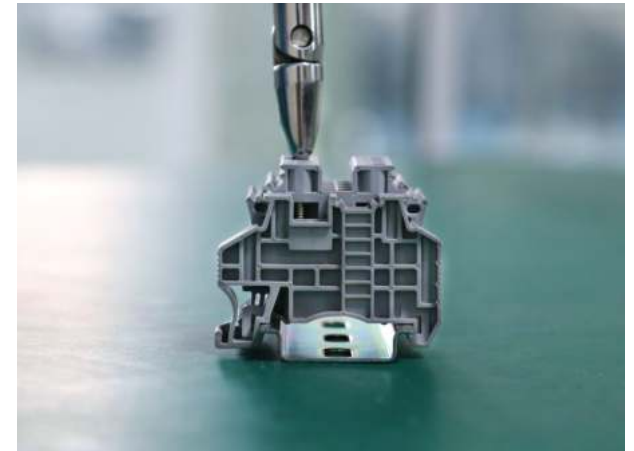

Din Rail Terminal Blocks Touch Protection Test



Din Rail Terminal Blocks Touch Protection Test

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04 Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: doc@nt-rt.ru || сайт: <https://degson.nt-rt.ru/>